


Metal Garden Shed

Wood Storage

OWNER'S MANUAL

Instructions for Assembly

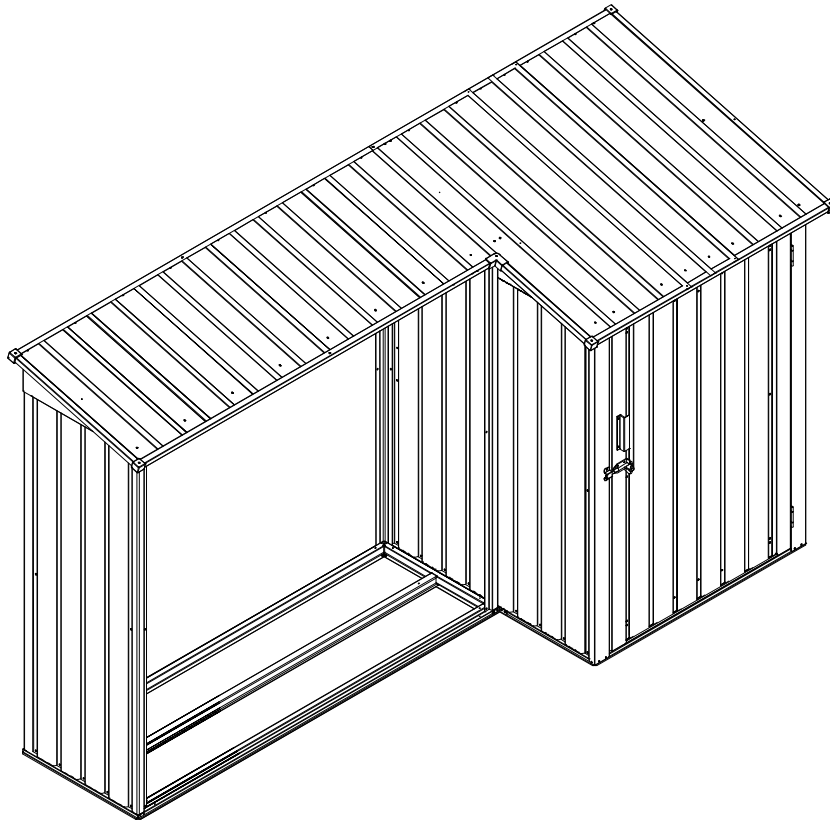

9820005

Overall Size: L270 x W105 x H130/158 cm
Overall Size: L8.8 x W3.4 x H4.3/5.2 Feet

Requires two people and takes at least 1-1.5 hours for Installation.

Quick & Easy Assembly

Ridge Reinforced Walls

BEFORE YOU START

Owner's Manual

Prior to installation, it is important that you contact your local government authority to determine if building approval is required. Study and understand this owner's manual. Important information and helpful tips will make your construction easier and more enjoyable.

Assembly instructions







Instructions are supplied in this manual and contain all appropriate information for your building model. Review all instructions before you begin. During assembly, follow the step sequence carefully for correct results. Please be aware: **this unit takes two people about one full day to complete.**

Parts

Check to be sure that you have all the necessary parts for the building.


Separate contents of the carton by the part number while reviewing parts list. Familiarize yourself with the hardware and fasteners for easier use during construction. These are packaged within the carton. Note that extra fasteners have been supplied for your convenience.

TOOLS MAY REQUIRED



Use heavy duty gloves when handling steel sheets and flashing

PLAN AHEAD

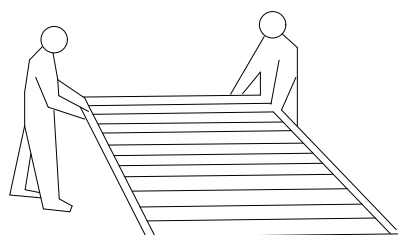

Watch the weather:

Please be sure the day you select for installation is dry and calm.

DO NOT attempt to assemble your shed in windy weather because of risk of damage to panels, or personal injury. Be careful of wet or muddy ground.

Teamwork:

Whenever possible, two or more people should work together to assemble the building. One person can position parts or panels while the other is able to handle the fasteners and the tools.

PLAN AHEAD

Site Selection

- Avoid overhanging trees as much as possible as leaves will make regular cleaning necessary and broken branches are a potential hazard.
- Small trees, bushes or fences nearby can be helpful, acting as a wind break.

Site Preparation

The site must be prepared so that the base of the shed is level all round and checking with a spirit level is required.

The base can be constructed by treated timber or concrete, in order to stop the moisture getting into the shed. **The shed is not designed to be built onto lawn directly.** Also the ground will get muddy during rainy days.


If a concrete pad is made, it is important that this slopes towards the edges to prevent water ingress.

Time must be allowed for any concrete or cement to dry before building the shed on top.

Bases can also be constructed from bricks, blocks, or mounted on a concrete pad.

The bricks or blocks should be cemented onto firm and level concrete footings and the greenhouse frame drilled and screwed to the base.

sharp edges





















Pay attention to the sharp edges. Please wear work gloves, long sleeves and eye glasses, when assembling or performing.


IMPORTANT NOTES:






- Find someone to help you: it is much easier with someone to hold parts, pass tools ect. Also some steps require two people to lift structures together. This is not very heavy work so would suit most able-bodied people.
- Allow plenty of time: rushing often causes errors and the re-doing of incorrect assemblies. If you have never built a shed before, it can take most of a day to carefully complete the construction.
- Have the right tools to hand.
- Safety clothing as recommended in the 'Tools' section.
- Ideally lay out the parts and check that all are present before commencing construction. Lay on cloths or plastic sheets if there is any risk of scratching the parts.
- Tighten all nuts carefully, being sure not to miss any. Check the frame is square and using a spirit level to check that it is upright.


NO.	PART	Qty.
1L	944mm/37.16"	1
1R	944mm/37.16"	1
C	944mm/37.16"	1
3R	944mm/37.16"	1
3	1620mm/63.78"	2
4L	516mm/20.31"	1
4R	516mm/20.31"	1
5L	1308mm/51.49"	1
5R	1308mm/51.49"	1
8	1390mm/54.72"	2
9	1540mm/60.62"	2
10	876mm/34.48"	2
10L	1528mm/60.15"	1
10R	1528mm/60.15"	1
11	448mm/17.63"	2
12	939mm/36.96"	1
13	939mm/36.96"	1
14	1615mm/63.58"	1
15	1621mm/63.81"	1

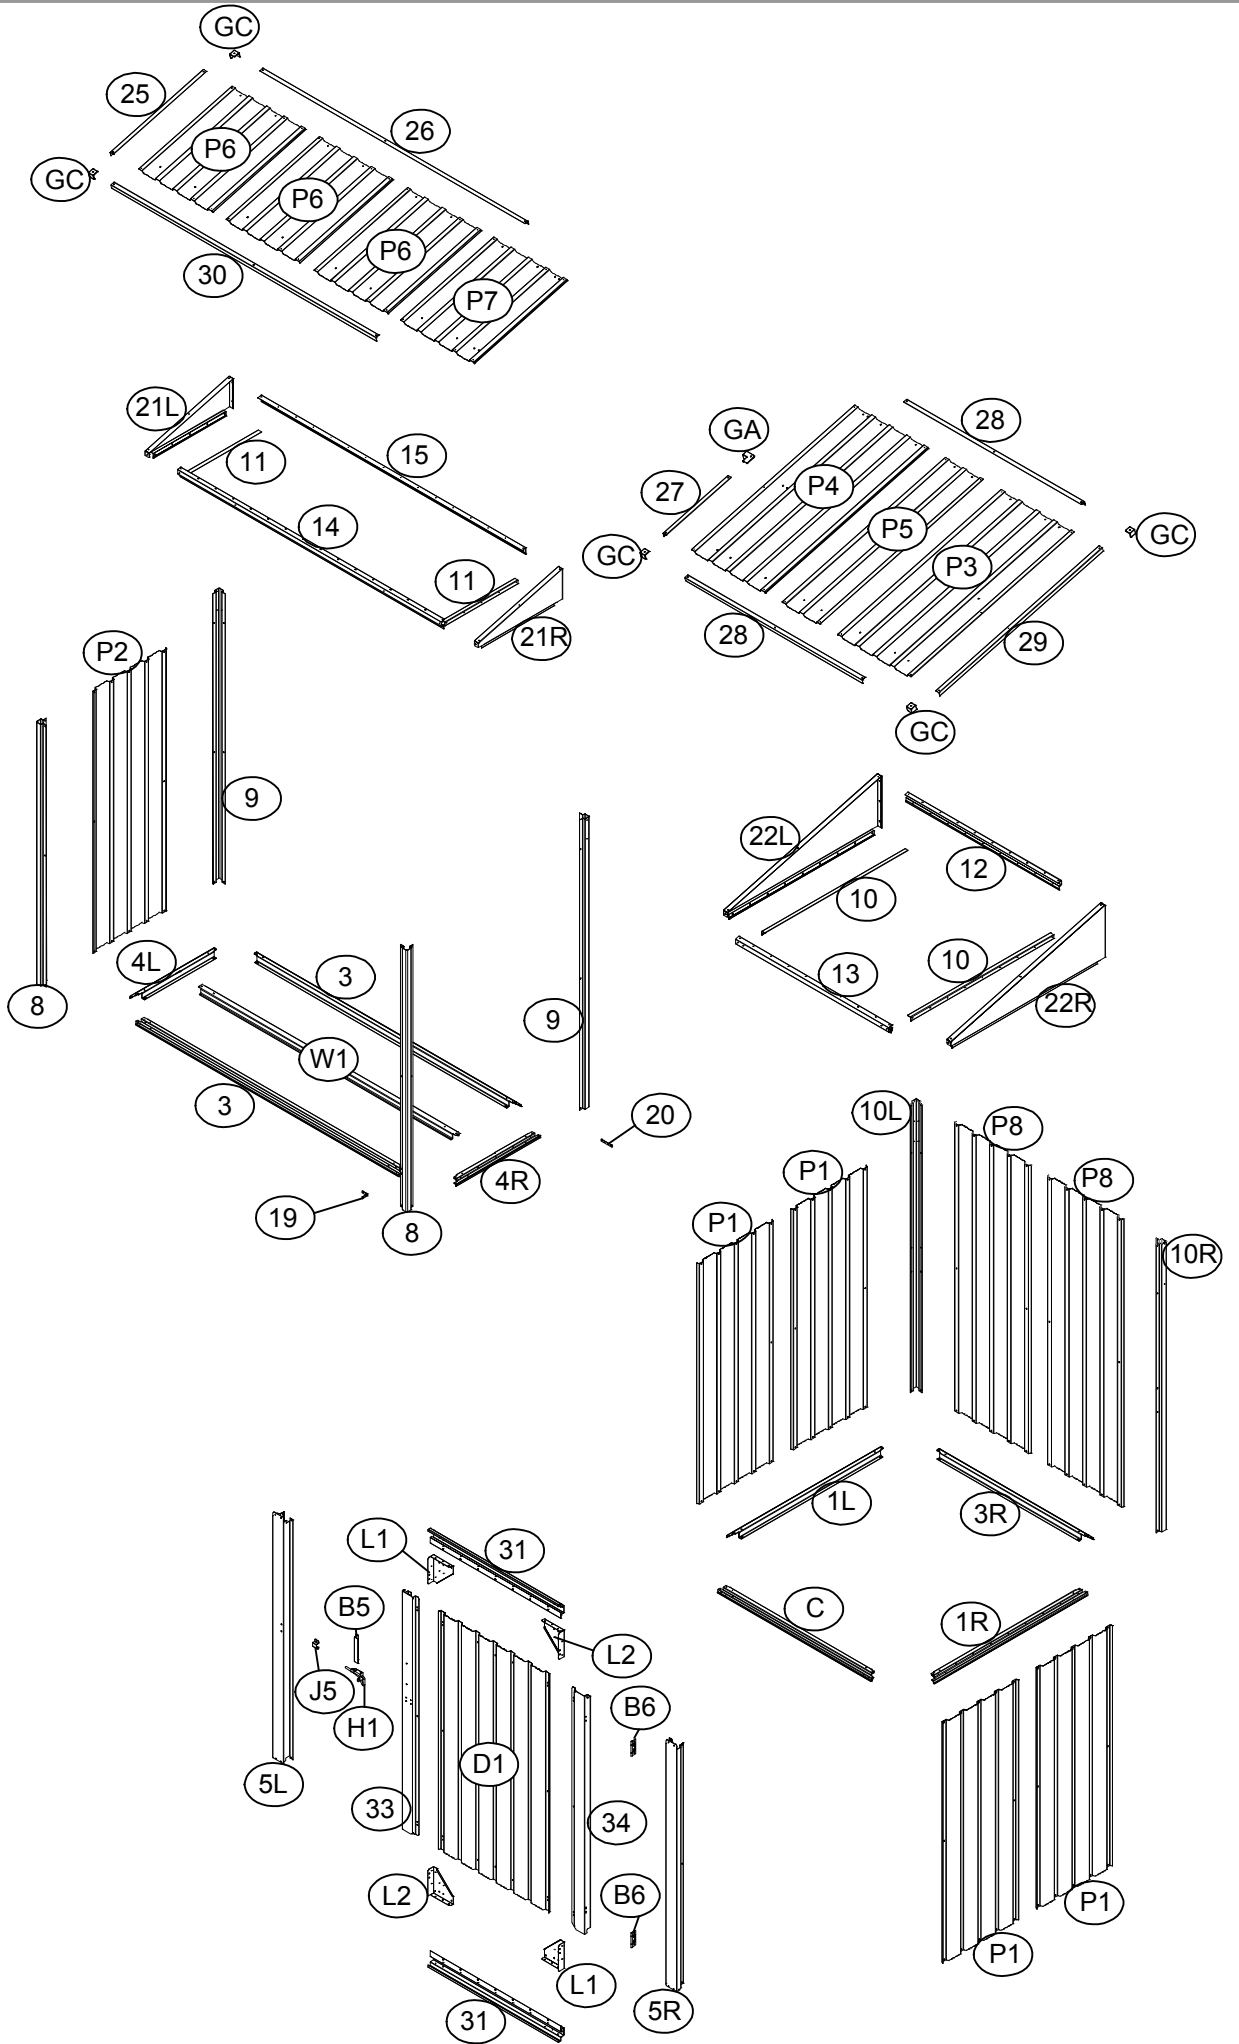NO.	PART	Qty.
19	944mm/37.16"	1
20	944mm/37.16"	1
21L	944mm/37.16"	1
21R	944mm/37.16"	1
22L	944mm/37.16"	1
22R	944mm/37.16"	1
25	592mm/23.3"	1
26	1623mm/63.89"	1
27	462mm/18.18"	1
28	1088mm/42.83"	2
29	1035mm/40.74"	1
30	1623mm/63.89"	1
31	799mm/31.45"	2
33	1264mm/49.76"	1
34	1264mm/49.76"	1
P1	1275mm/50.19"	4
P2	1390mm/54.72"	1
P8	1528mm/60.15"	2
P3	1035mm/40.74"	1




NO.	PART	Qty.
P4	 1035mm/40.74"	1
P5	 1035mm/40.74"	1
P6	 592mm/23.3"	3
P7	 592mm/23.3"	1
D1	 1263mm/49.72"	1
B6		2
H1&J5		1
GA		1
GC		5
F1	 #8AB-18x2/13	230
F2	 #8-32x2/13	30
S3		180
W1	 1580mm/62.2"	1
L1		2
L2		2
B5		1
S4		120
F3	 #8-32x2/13	8



NO.	PART	Qty.
1L		1
1R		1
C		1
3R		1
F1		8




Base of Tool Shed Assembly

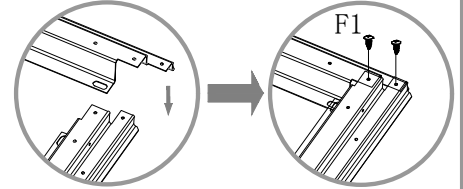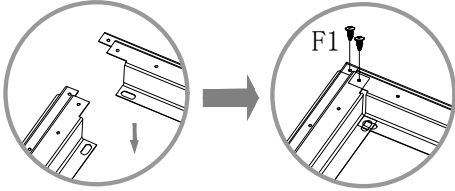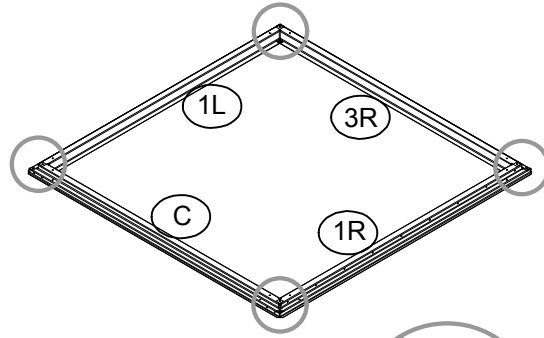



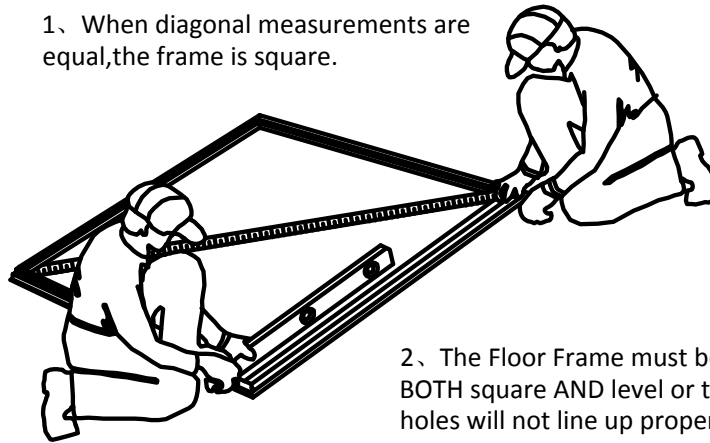


1. When diagonal measurements are equal, the frame is square.

Inspection









2. The Floor Frame must be BOTH square AND level or the holes will not line up properly.


NO.	PART	Qty.
5L		1
5R		1
F1		8
S3		6

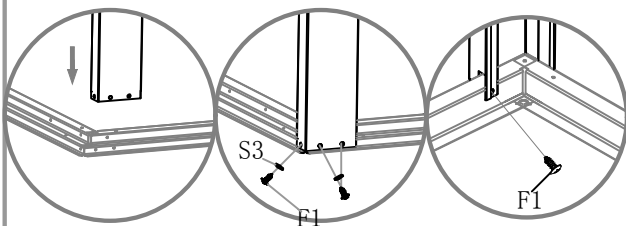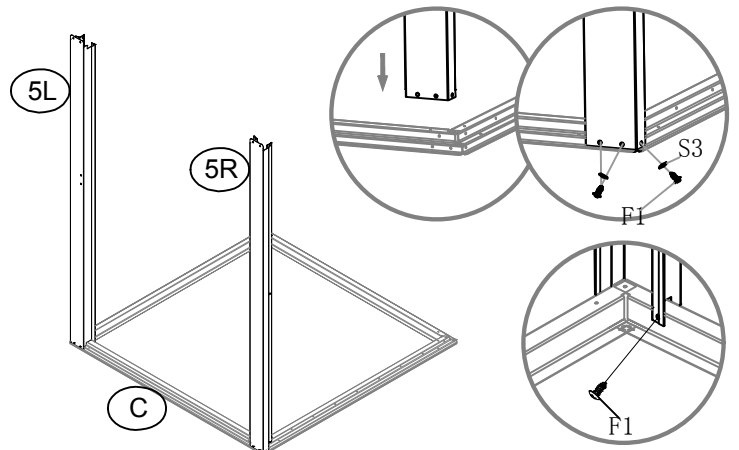




Door Post of Tool Shed Installation








NO.	PART	Qty.
P1		2
F1		8
S3		10
F2		2

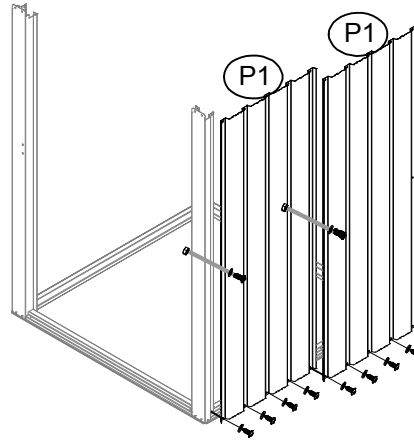


Right Side Wall Panels Installation












NO.	PART	Qty.
10R		1
P8		2
F1		9
S3		12
F2		3

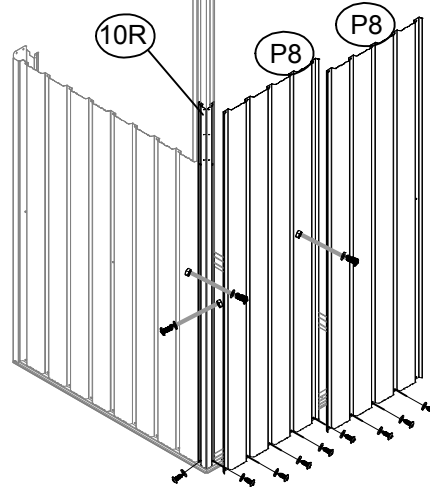Wall Panels Installation




Corner Post 10R
inside










NO.	PART	Qty.
10L		1
P1		2
F1		10
S3		14
F2		4


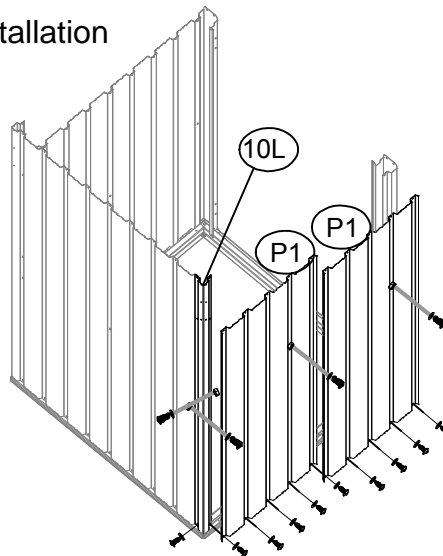
Left Side Panels Installation








Corner Post 10L
inside

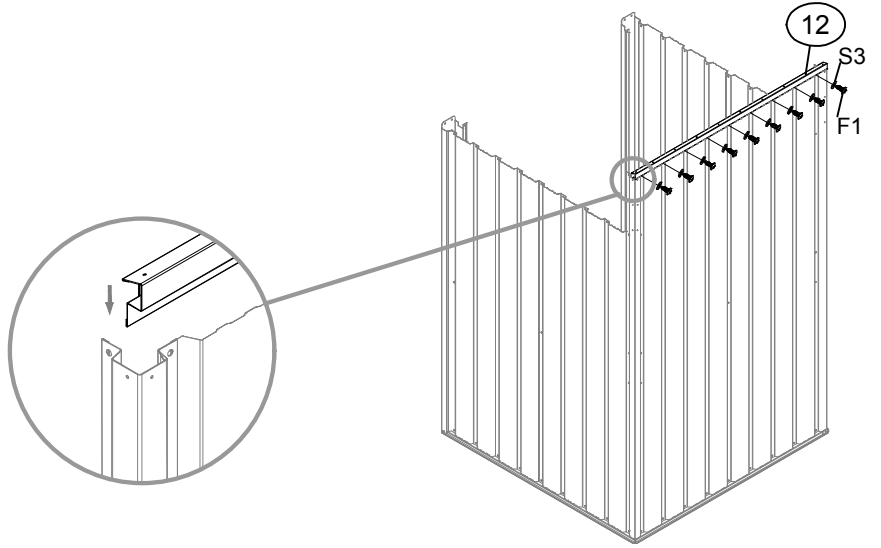


NO.	PART	Qty.
12		1
F1		9
S3		9








NO.	PART	Qty.
22L		1
10		1
F1		12
S3		12

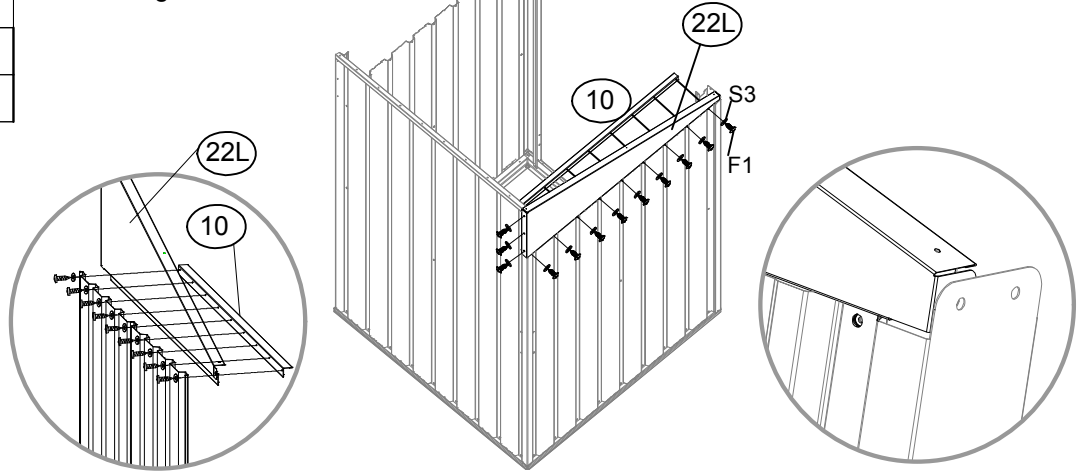

Left Side Upper Beam Installation
Left Triangle Panel Installation




NO.	PART	Qty.
22R		1
10		1
F1		12
S3		12



Right Side Upper Beam Installation

Right Triangle Panel Installation

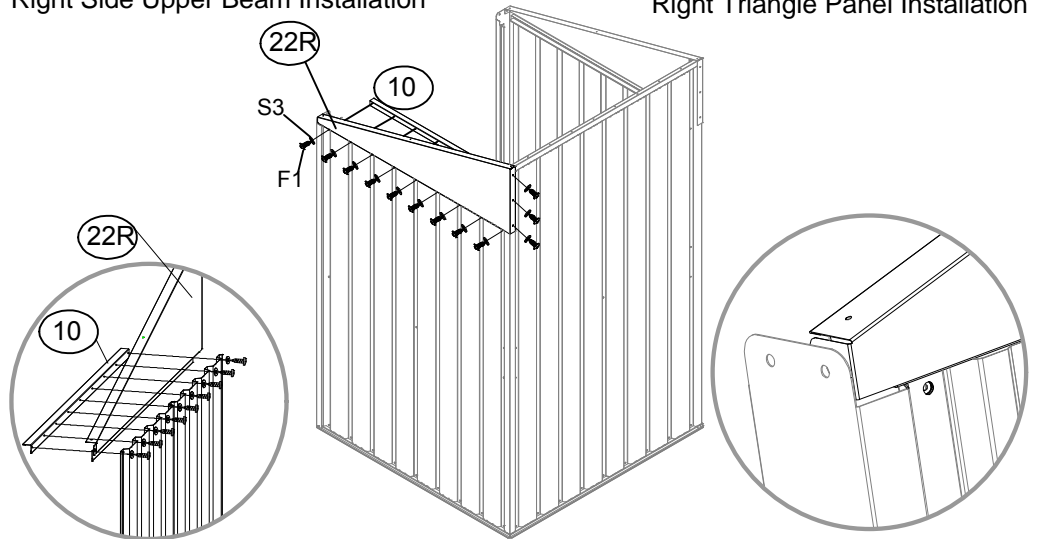

NO.	PART	Qty.
13		1
F1		6
S3		6





Front Upper Beam Installation


NO.	PART	Qty.
4L		1
4R		1
3		2
W1		1
F1		8

Base of Wood Storage Cabinet Installation


NO.	PART	Qty.
8		1
9		1
P2		1
F1		6
S3		8
F2		2







**Side Wall Panel Installation
Corner Post Installation
(Wood Storage Cabinet)**

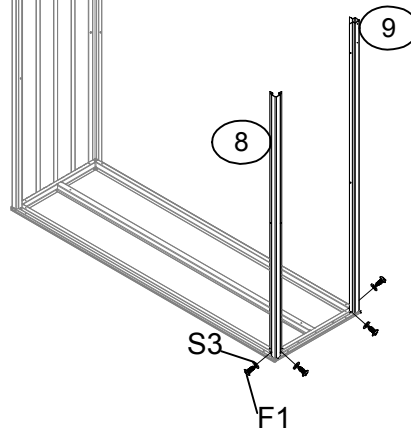
NO.	PART	Qty.
8		1
9		1
F1		4
S3		4




Right Corner Posts Installation






NO.	PART	Qty.
21L		1
21R		1
11		2
14		1
F1		14
S3		14







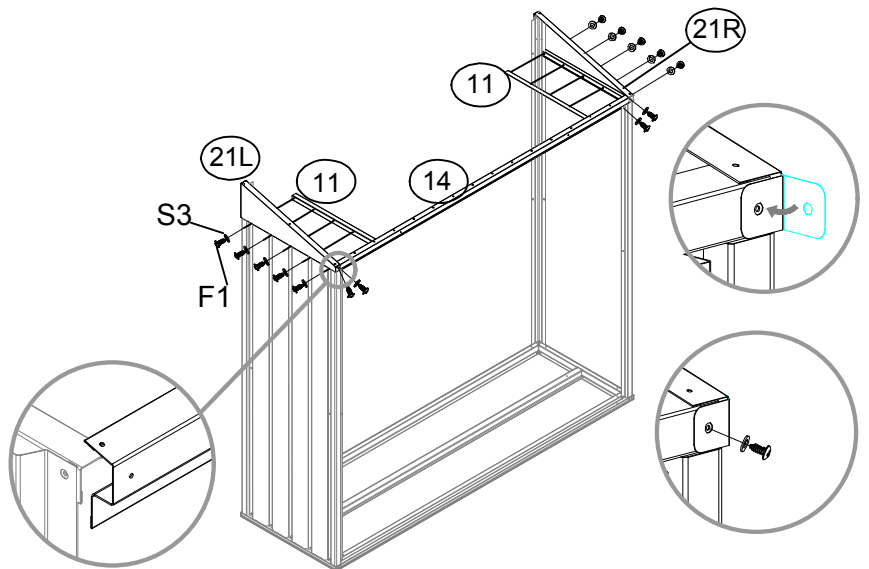

Front Beam, Frame and Triangle Panels Installation (Wood Storage Cabinet)





NO.	PART	Qty.
15		1
F1		4
S3		4

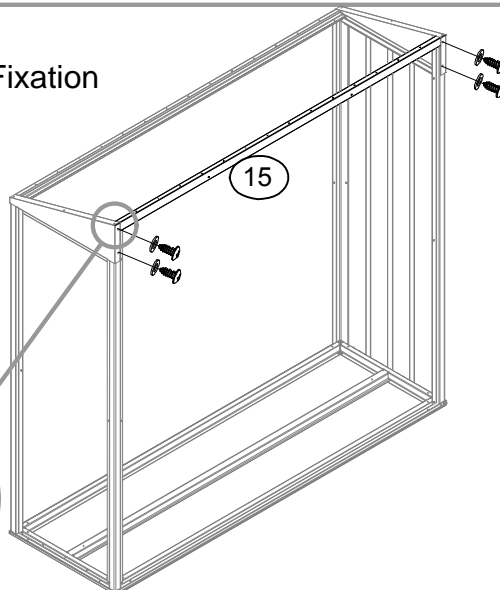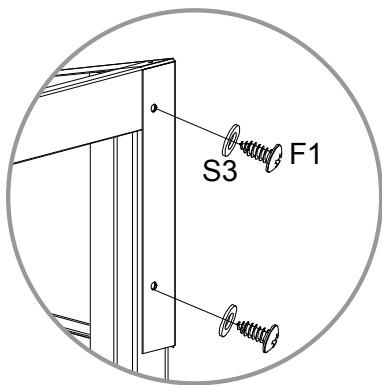

Triangle Panels Fixation


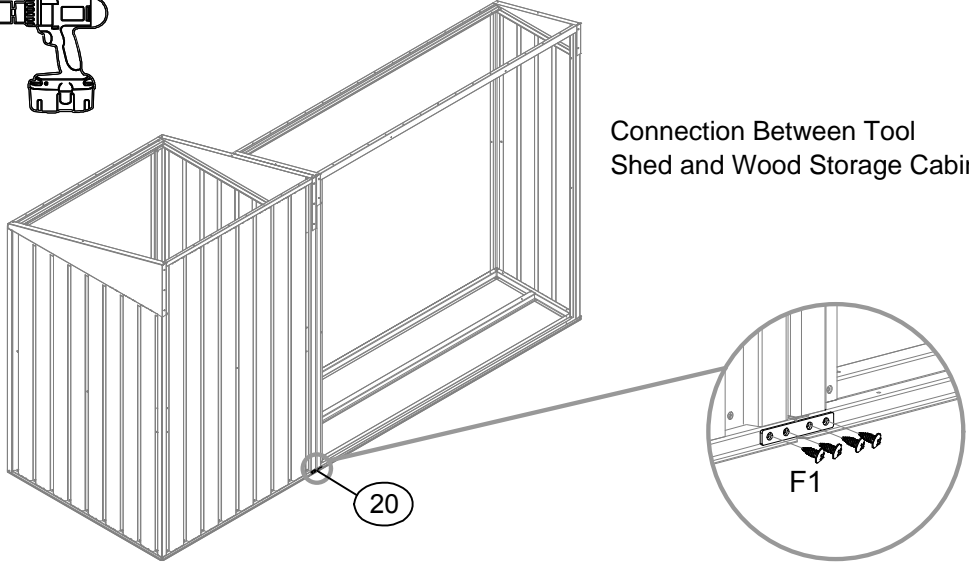


NO.	PART	Qty.
20		1
F1		4






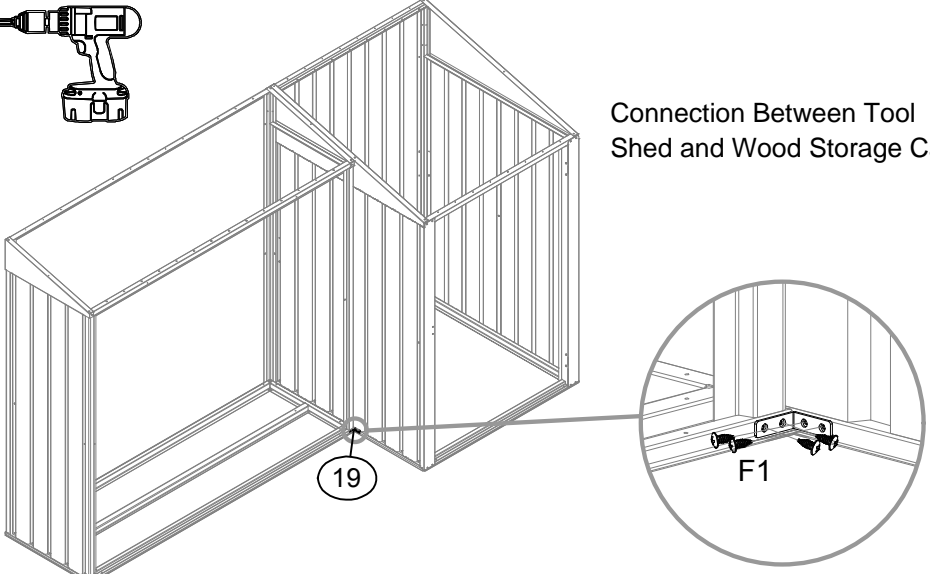



Connection Between Tool Shed and Wood Storage Cabinet

NO.	PART	Qty.
19		1
F1		4










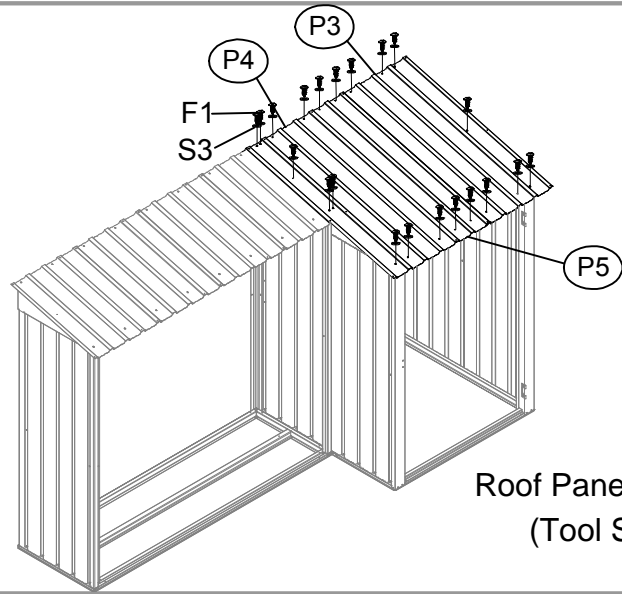

Connection Between Tool Shed and Wood Storage Cabinet

NO.	PART	Qty.
P6		3
P7		1
F1		16
S3		16

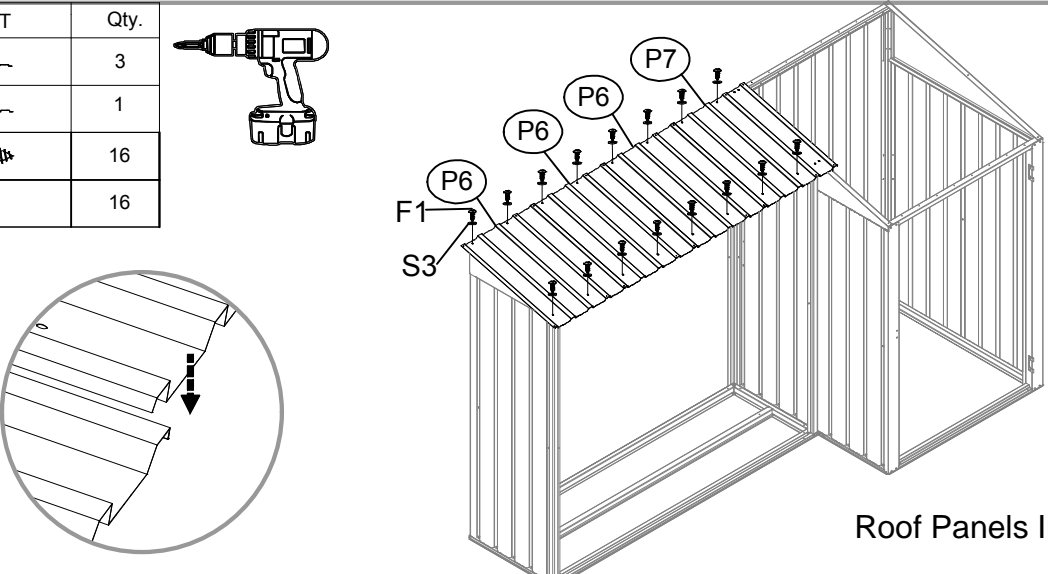








Roof Panels Installation




NO.	PART	Qty.
P3		1
P4		1
P5		1
F1		21
S3		21








Roof Panels Installation
(Tool Storage)

NO.	PART	Qty.
25&26&27 29&30		1
28		2
GA		1
GC		5
F1		10
S3		4


Eaves and Plastic Ends Installation

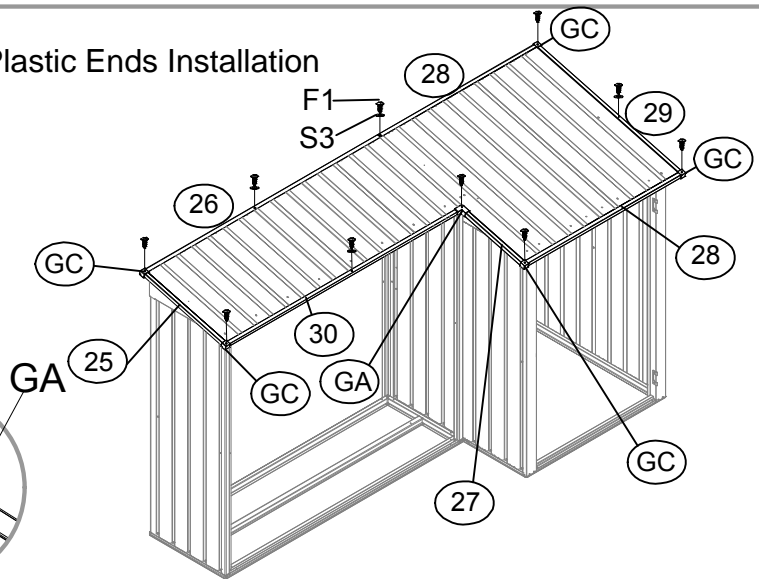






NO.	PART	Qty.
L1		2
L2		2
31		2
F1		8

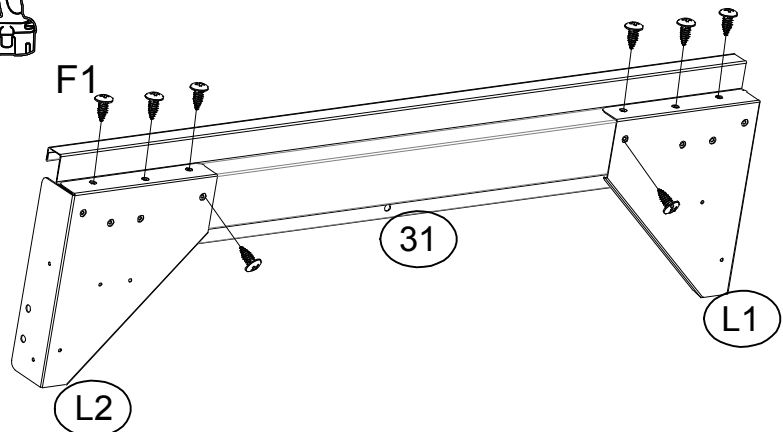


Corner Connector Installation






x2


NO.	PART	Qty.
D1		1
33		1
34		1
S3		2
F2		2

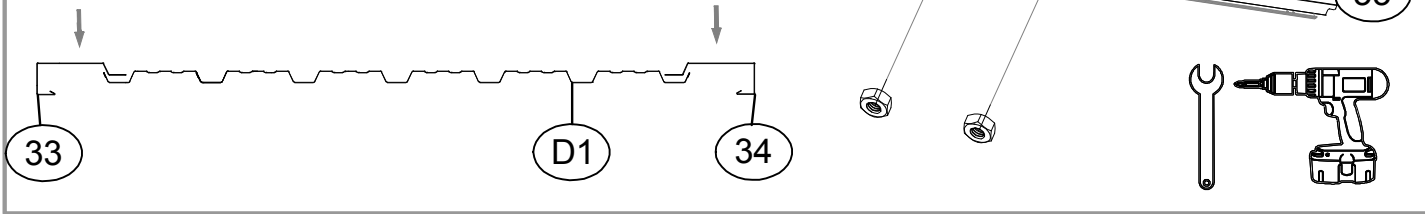


Door Panel and Door Frame Assembly




NO.	PART	Qty.
F1		12
S3		14
F2		2

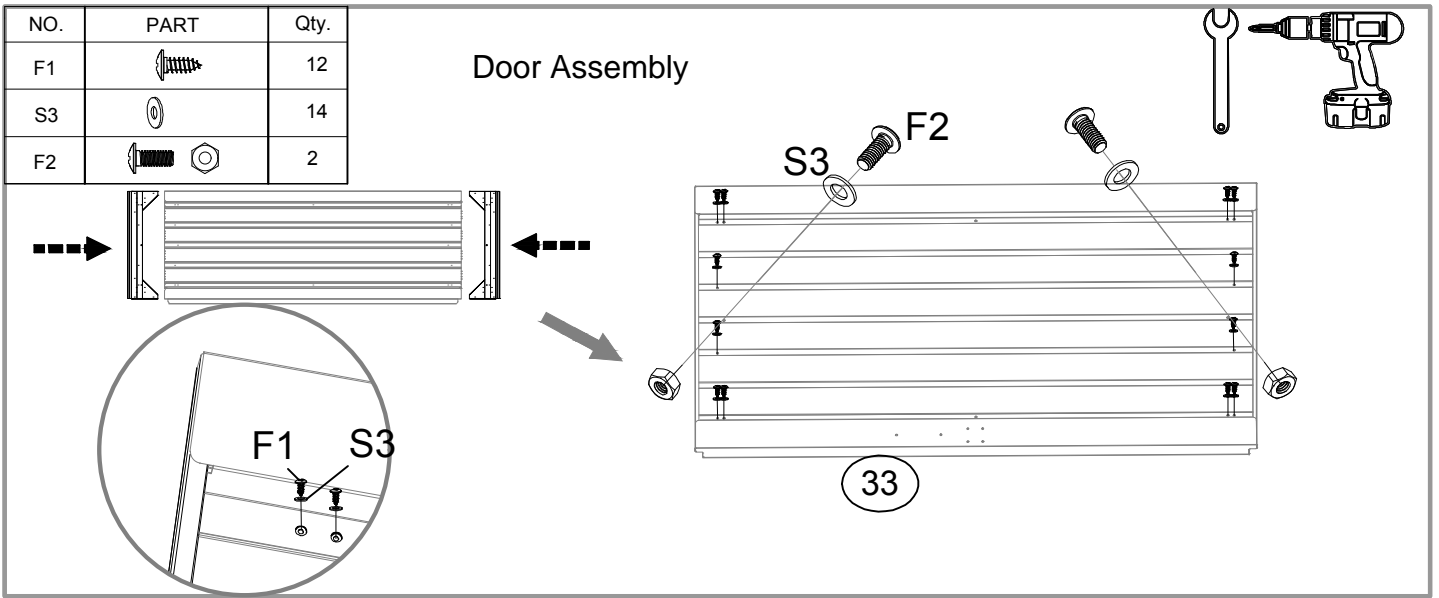
Door Assembly




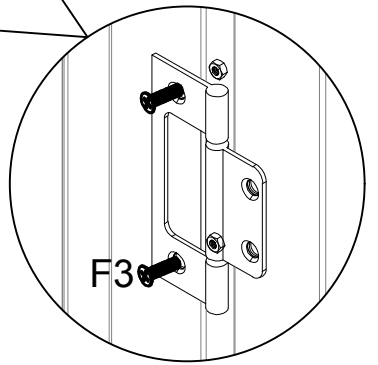
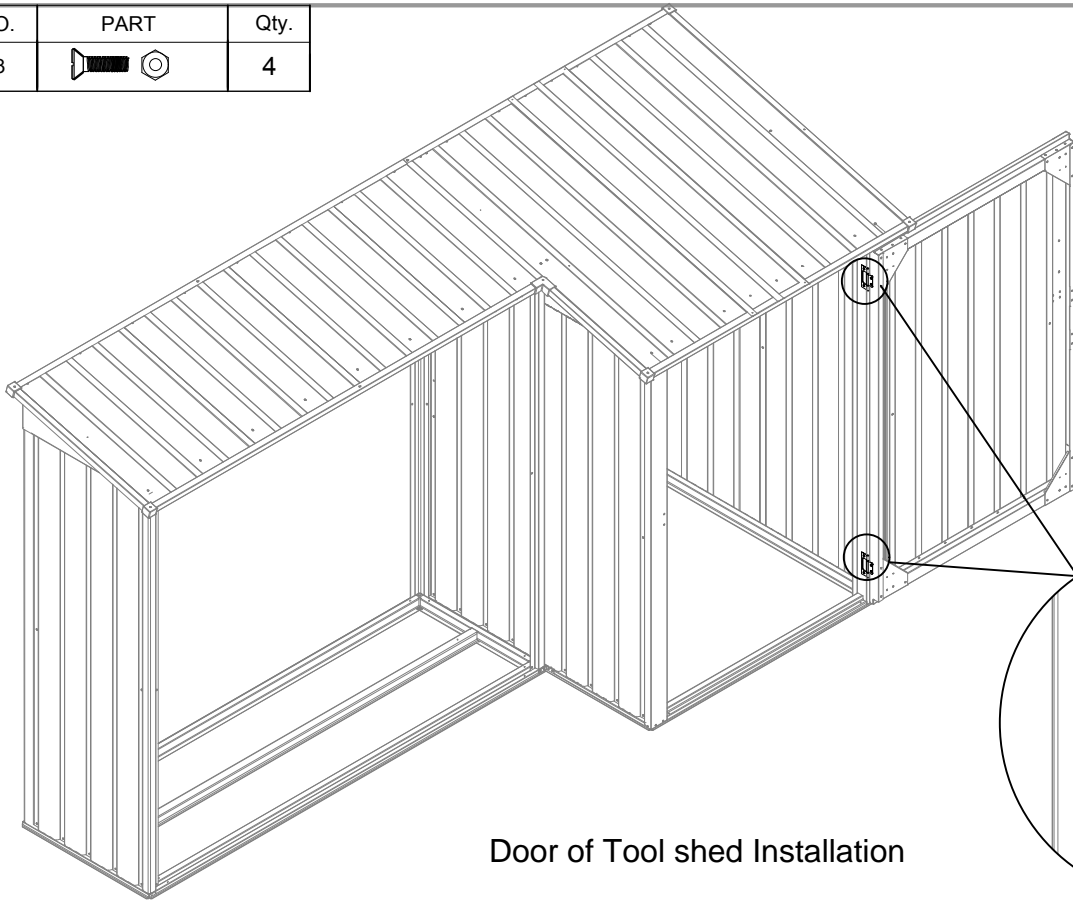

NO.	PART	Qty.
B6		2
F1		4
F3		4



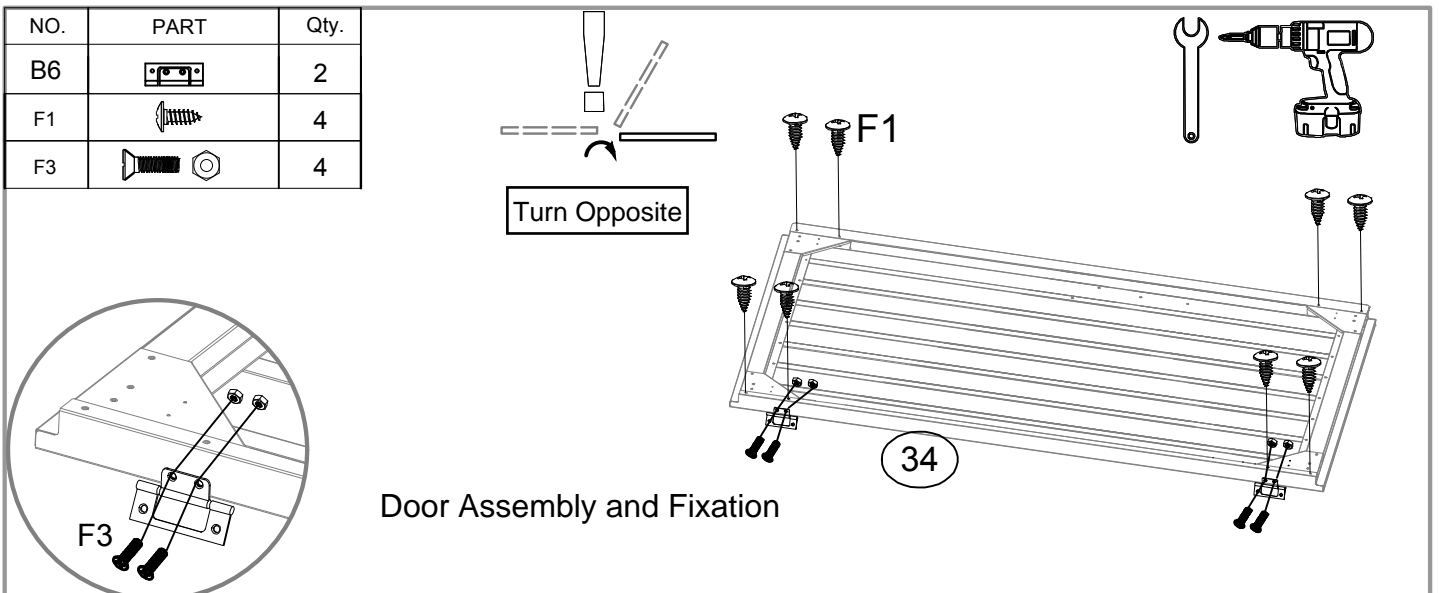


Door Assembly and Fixation






NO.	PART	Qty.
F3		4



Door of Tool shed Installation

NO.	PART	Qty.
H1&J5		1
B5		1
F2		2

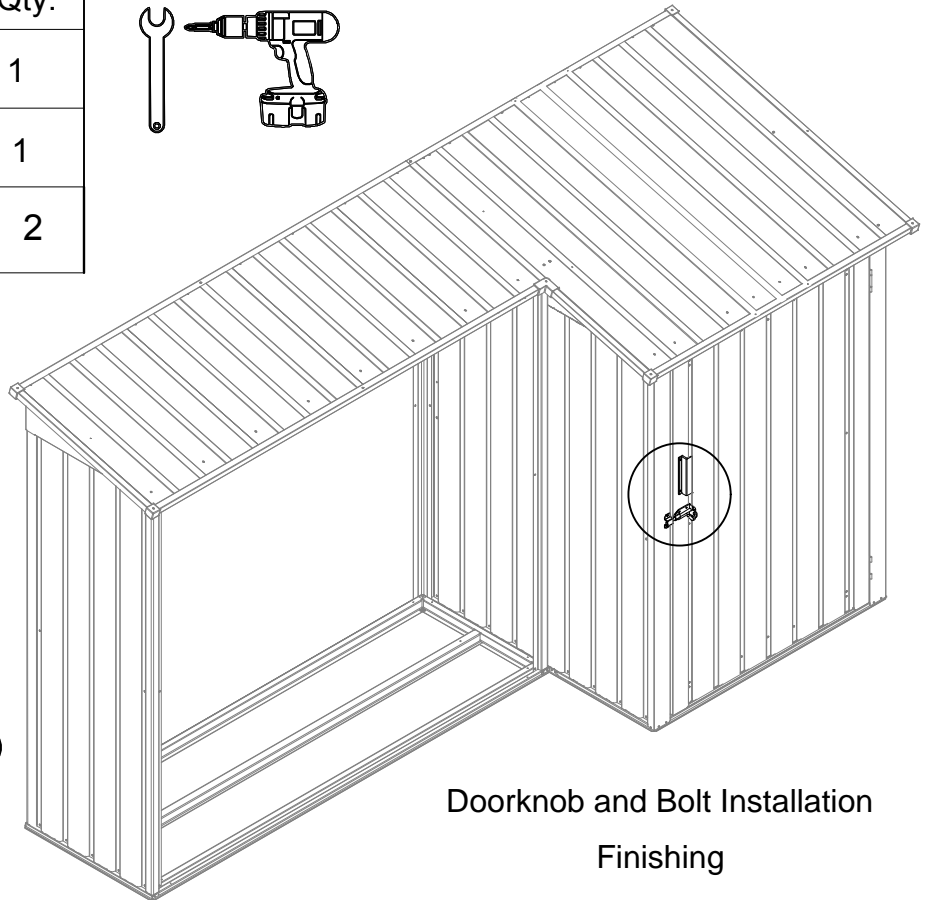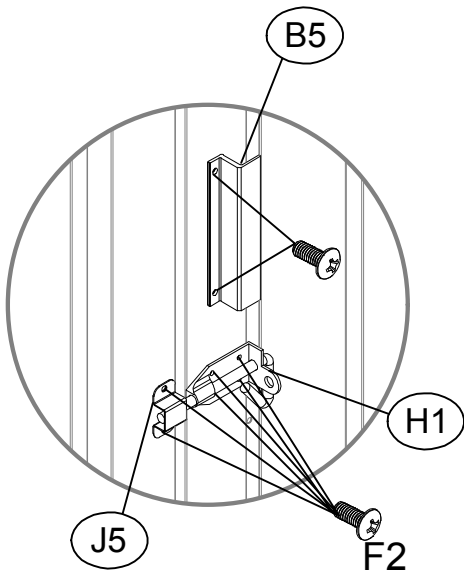

Doorknob and Bolt Installation
Finishing