


TECHNICAL SPECIFICATIONS			
VOLTS		120V 60Hz	
AMPS		10	
WATTS		1200 W	
HEATER	HIGH	1200 watts	
HEATEK	LOW	600 watts	
NO HEATER		22 watts	
	TYPE	LED	
LAMPS	WATTS		
Т	OTAL WATTS	22 watts	
ROTOR MOTOR		1 at 5 watts	
HEIGHT,WIDTH,DEPTH		41 1/8" x 47 1/4" x 13 3/4"	
GLASS VIEWING OPENING		36 7/8'' X 45 3/8''	
GLASS SIZE		37 1/4" X 45 7/8"	
SHIPPING SIZE		44" x 52 1/8" x 16 7/8"	
SHIPPING WEIG	GHT	170.4 lbs	
	UNIT	150.6 lbs	
G	LASS FRONT	Included	
PLUG LOCATION		Left Side	
CORD LENGTH		76"	
APPROX. HEATING AREA		400 sq ft	



SERIES TRADITIONAL	TRD-48	CS US	REV 1
SCALE 1"=1'-0"	DATE: 8/5/2019	SHEET 1 OF 1	

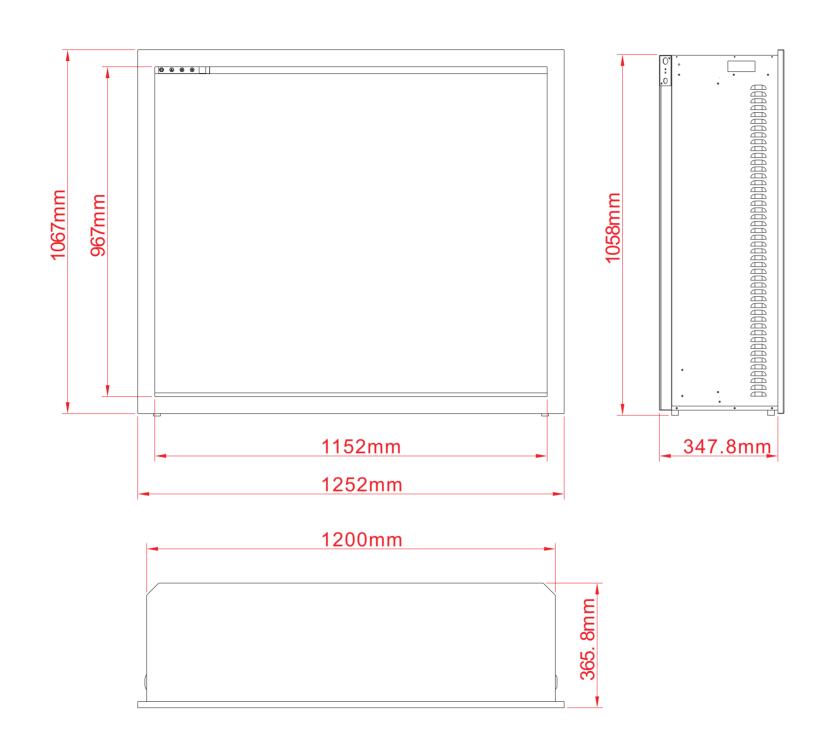

TECHNICAL SPECIFICATIONS				
VOLTS		120V 60Hz		
AMPS		10		
WATTS		1200 W		
HEATER	HIGH	1200 watts		
HEATER	LOW	600 watts		
NO HEATER		22 watts		
	TYPE	LED		
LAMPS	WATTS			
	TOTAL WATTS	22 watts		
ROTOR MOTO	OR	1 at 5 watts		
HEIGHT,WIDTH,DEPTH		105.8 x 120 x 34.8 cm		
GLASS VIEWING OPENING		93.6 X115.2 cm		
GLASS SIZE		95.4 X116.4 cm		
SHIPPING SIZE		111.7 x 131.5 x 43 cm		
SHIPPING WE	EIGHT	77.3 Kgs		
	UNIT	68.3 Kgs		
	GLASS FRONT	Included		
PLUG LOCATION		Left Side		
CORD LENGTH		193 cm		
APPROX. HEATING AREA		37 sqm		



SERIES	MODEL		REV
TRADITIONAL	TRD-48	c ⊕ us	1
SCALE 1:12	DATE: 8/5/2019	SHEET 1 OF 1	