

LIVING DISTRICT


Collection: Rosenfeld

Installation manual for:

LD7066D14BK/BR L14" W13.2" H20.5" L4

Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
 3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
 4. Secure mounting bracket to the junction box.
 5. Twist tube(P9) to wire box(P10), then twist the tube (P9) on (P8), adjust the lamp arms(P16), connect chain(P6) to toothed ring (P7), connect chain(P6) to canopy(P4)
 6. Use the screw(P3) to lock the lamp body to the mounting bracket(P1) on the ceiling.
 7. Put the socket tube(P13) on the socket (P14), and install E12 light source.(Bulbs not supplied)
- The end!

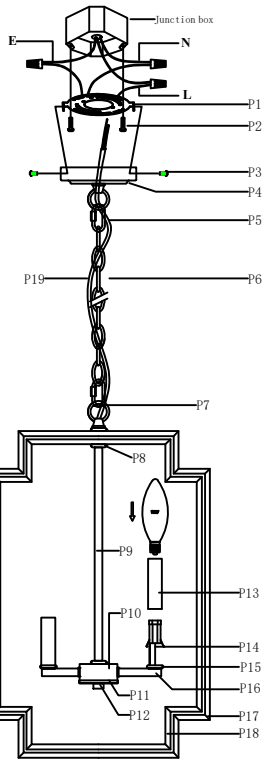

Part	Picture	Description	Qty	Check list
P1		mounting bracket Φ4.53"*H0.59"	1	
P2		Mounting bracket screw	2	
P3		Screw	2	
P4		Canopy (Φ4.72"*H1.02")	1	
P5		Activity buckle L1.5"*W0.78"*Φ0.15"	2	
P6		Hanging chain(CHAIN04P) L1.5"*W0.78"*Φ0.15"(Total length 59")	1	
P7		Toothed ring W1.3"*H1.6", M10	2	
P8		Cover Φ0.79"*H0.19"	3	
P9		Rod L13.39"*Φ0.49"	1	
P10		Wire Box Φ2.36"*H1.18"	1	
P11		Wire box cover Φ2.44"*Φ0.2"	1	
P12		Nut Φ0.6"*H0.3"	1	
P13		Socket Tube Φ0.87"*H3.35"	4	
P14		E12 holder	4	
P15		Cover Φ0.98"*H0.19"	4	
P16		socket rod L3.15"	4	
P17		Lamp frame W20.5"H14.5"	1	
P18		Lamp frame W19.4"H13"	1	
P19		UL18#SVT-3, L78.7"	1	

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire