



Always check the website for the most updated specifications: [www.americh.com](http://www.americh.com)

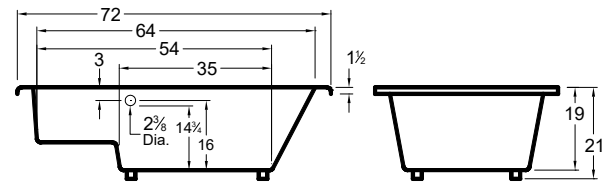


Tub pictured with optional waste & overflow

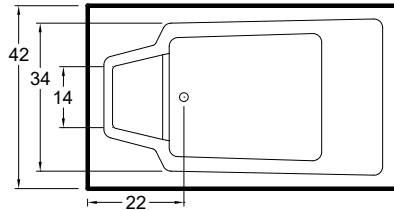


All bathtub dimensions are  $\pm 1/2$ "


## Builder Series



## Luxury Series




## Platinum Series




## Combination



(pump and blower location only)



## Airbath System II



## Airbath System III



### INSTALLATION TIPS

- Install according to Owner's Manual and local codes. Always consult your local plumber for recommendations.
  - Certain options or altering the pump/blower location may cause the pump/blower to extend beyond the tub decking.
  - Airbath III units may be 1 1/2" - 2 1/2" taller than stated.
  - Hot water supply should be 65-75% of the tub capacity or greater.
  - Cut Dimensions: 70"x40" It is recommended to wait for unit to arrive before cutting
  - All specifications are subject to change without notice
- ++ Factory installed aprons on this model may increase the overall height of the tub when ordered with certain accessories (.IE Linear Drain)

### DIMENSIONS

72" x 42" x 21" (1829 x 1067 x 533 mm)  
Whirlpool Operating Gallons = 65 (Liters = 246)

**MATERIAL:** Acrylic (All Americh Standard Colors)

**TUB FLOOR:** Textured

**UNDERMOUNT:** Yes

- Advise Americh when ordering to ensure there are no issues with deck mounted controls.
- Always take dimensions directly from the unit.

### ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

### OPTIONAL ACCESSORIES

- Apron ++
- Chromatherapy\*
- Grab Bars: 9" - 14" \* - 16"
- High Density Insulation\*
- iBath Sound System
- Inline Heater
- Jets: Additional or Rotary\*
- Lo Profile Tub Edge
- Ozone System (whirlpool and/or Airbath only)
- Pillow: Angle\*  
13"- Full Back
- Remote Control Upgrade (select series only)
- Serenity Soak (tub only)
- Syllent Pump with Heated Air\*
- Tile Flange Kit
- Trim Kit Upgrade\*
- Waste & Overflow
  - Cable Drive Overflow\*
  - Linear Overflow

\*Standard on Platinum Series

### CODES AND COMPLIANCE

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
  - Underwriters Laboratories - Canada (cUL)
  - Canadian Standards Association - (CSA)
  - ANSI Z124.1 • ANSI A112-19.7
  - ANSI A112.19.8 • ASTM F462-79
- Contact Americh for additional approvals.