

# **MERICH**®

# VALERIE 7240



# 36 36 29 0





# **DIMENSIONS**

72" x 40" x 24" (1829 x 1016 x 610 mm) Gallon to Overflow = 90 (Liters = 424) Factory installed integral drain.

# **MATERIAL**

Acrylic

# **TUB FLOOR**

Non - Textured

# **UNDERMOUNT:**

This tub is not designed for undermount installation.

# **APPROVALS & COMPLIANCE**






Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories Canada (cUL)
- ANSI Z124.1 ANSI A112-19.7
- ANSI A112.19.8

Contact Americh for additional approvals.

# AMERICH. VALERIE™ 7240

#### **LEGEND**

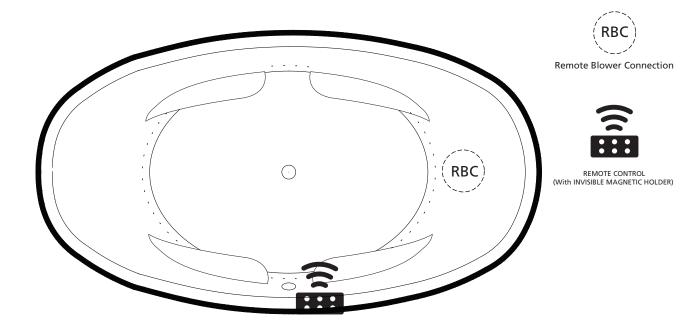

# Airbath System II Blower must be remotely located (Diagram is required for custom blower connection)

# **STANDARD EQUIPMENT**

- Americh Remote Control (with AirBath System only)
- Integral Waste & Overflow

### **OPTIONAL ACCESSORIES**

- Dual Color (Premium Color Upcharge)
- Pillows: 12" Angle
- Linear Waste & Overflow Upgrade

#### **INSTALLATION TIPS**

- Install according to Owner's Manual and local codes.
- Always consult your local plumber for recommendations as installations will vary.
- The bath must be secured to the floor by applying a bead of silicone around the base (which can be cut in future should there be a need to access to the plumbing).
- Installation must be carried out according to the manufacturer instructions.
- Hot water supply should be 65-75% of tub capacity or greater.

# **ELECTRICAL REQUIREMENTS**

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.