



# ODESSA™ 6635



# 35 27 21 9½





# **DIMENSIONS**

 $66" \times 35" \times 25" (1676 \times 889 \times 635 \text{ mm})$ Gallon to Overflow = 70 (Liters = 265)

# **MATERIAL**

Acrylic

#### **TUB FLOOR**

Non - Textured

UNDERMOUNT: No

# **APPROVALS & COMPLIANCE**






Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories Canada (cUL)
- Canadian Standards Association (CSA)
- ANSI Z124.1 ANSI A112-19.7
- ANSI A112.19.8

Contact Americh for additional approvals.

BATHING SYSTEMS LEGEND

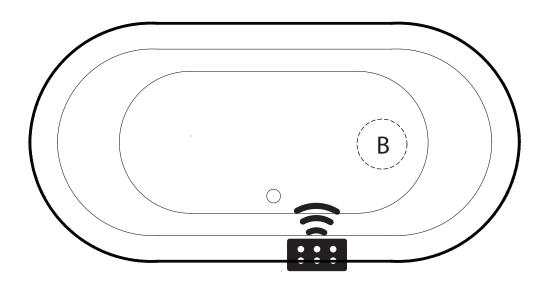





Airbath System III

Blower must be remotely located
(Diagram is required for custom blower connection locations)

# STANDARD EQUIPMENT

- Americh Remote Control (with AirBath System only)
- Integral Waste & Overflow in polished chrome trim Note: Available with PB, PN, SN, ORB or WH trim at no additional charge if specified at time of order. (Requests after order is shipped are subject to \$75 charge for trim.)

#### **INSTALLATION TIPS**

- Install according to Owner's Manual and local codes.
- Airbath III units may be 11/2" 21/2" higher than stated.
- Any whirlpool or Airbath® unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater.
- Always consult your local plumber for recommendations as installations will vary.

#### **OPTIONAL ACCESSORIES**

- Dual Color (Premium Color Upcharge)
- Pillows: 12" Angle
- Waste & Overflow Upgrades
- Linear Waste & Overflow

#### **ELECTRICAL REQUIREMENTS**

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.