


Always check the website for the most updated specifications: [www.americh.com](http://www.americh.com)

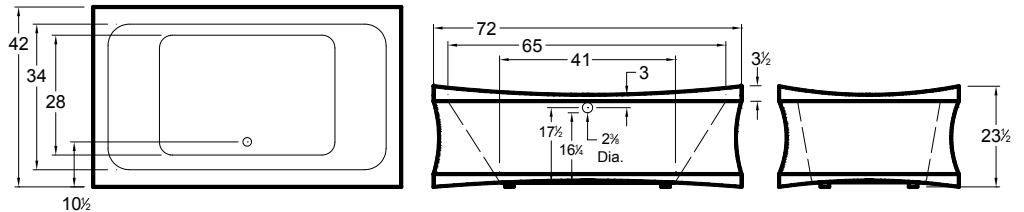

All bathtub dimensions are ± 1/2".

### CODES AND COMPLIANCE

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- Canadian Standards Association - (CSA)
- ANSI Z124.1 • ANSI A112-19.7
- ANSI A112.19.8 • ASTM F462-79

Contact Americh for additional approvals.

### ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

### DIMENSIONS

72" x 42" x 23" (1829 x 1067 x 584 mm)

Whirlpool Operating Gallons = 63 (Liters = 238)


Gallon to Overflow = 110 (Liters = 416)

### WASTE & OVERFLOW: Includes Integral Waste & Overflow


- Oil Rub Bronze
- Polished Chrome
- Polished Nickel
- Satin Chrome
- Satin Nickel

**STANDARD COLORS:** White and Biscuit


### Builder Series



### Luxury Series




### Platinum Series




### Combination

(pump and blower location only)

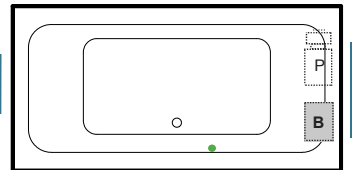

### Airbath System II



### Airbath System III

N/A

**LEGEND:**

- P PUMP
- B BLOWER
- JET
- ROTARY JET
- DUAL SUCTION
- LIGHT
- ON/OFF CONTROL
- GRAB BAR
- ACCESS PANEL (MINIMUM 16" X 20")

## ACCESSORIES

Apron	Grab Bars					Pillow				Tile Flange	Installation	
	9"	14"	16"	Madison	Rail	13"	17"	Angle	Head Support System		Deckmount	Undermount
	•	•	•			•					No	No

• = option is available       = standard on Platinum Series       = option is not available

### INSTALLATION TIPS

- Install product according to Owners Manual and local codes.
- Access panel for whirlpool systems and Airbath® System II included with the Velero Freestanding.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.