Pfister

Verve™


Tub Filler

LG6-3VRVC Finish(C) □

LG6-3VRVB Finish(B) □

LG6-3VRVBG Finish(BG) □

LG6-3VRVD Finish(D) □



Specifications

Features

- 8 GPM @ 45 PSI Flow Rate
- 1.8 GPM Flow Rate (Handheld)
- 60" Metal Hose
- All Metal Construction
- Ceramic Disc Valves
- Easy to Clean Nozzles
- Ribbon Water Flow
- Optional Wall Mount Valve OX6-34OR Available (Sold Separately)
- Decorative Lever Available, Order HHL-LG63VRVL* (Sold Separately)
- Pforever Warranty®

Code Compliance

• All Metal Construction

Pfister products are designed and manufactured in compliance with the following standards and codes:







- ADA Compliant ANSI A117.1 (Lever Handles Only)
- CEC Certified/CALGreen compliant
- EPA WaterSense Certification 1.8 gpm, 6.8L/Min





Dimensions

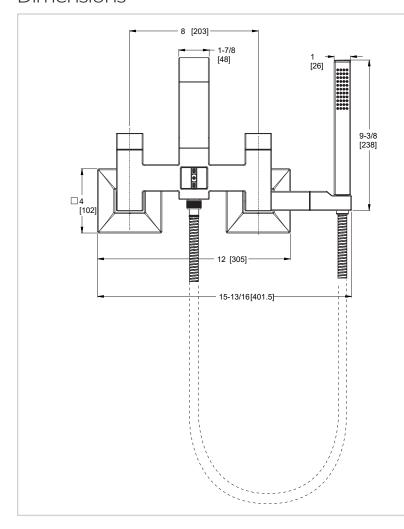

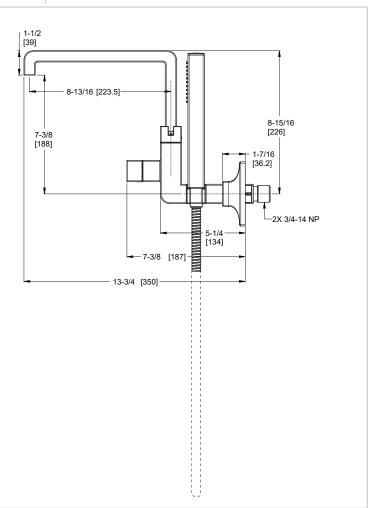

SS-LG6-3VRVX