

Royale - R-2440L/R-E- Specification Sheet

Features

- Mirror cabinet without light
- Mirrored interior with 3 adjustable glass shelves
- Includes adjustable makeup mirror with light
- Includes outlet
- Includes a magnet on the bridge
- Includes installation hardware for recess mounting
- Can be recessed or surface mounted (surface mounting kit required)

Construction

- Grey aluminum body and door frame
- 3 mirror design rear of cabinet and both sides of door
- Concealed finger pull-door edge
- Three pieces DTC 155° self-closing hinges
- Adjustable shelving at 2 1/3" (60 mm) increments
- Single field wire into electrical shelf Front access serviceability

Codes / Standards Applicable

Electric Option Models are ETL certified to:


- UL 962
- CSA Standard C22.2 No. 68


Dimensions

- Height: 40" (1016mm)
- Width: 24' (608 mm)
- Depth: 5" (127 mm)
 - 1" (25 mm) Project from wall when recessed

Installation Options

- Recessed Mount Rough Opening 39-1/2" H x 23-1/2" W x 4" D
 (1003mm H x 597mm W x 102mm D)
- Surface Mount Surface Mount Kit is included

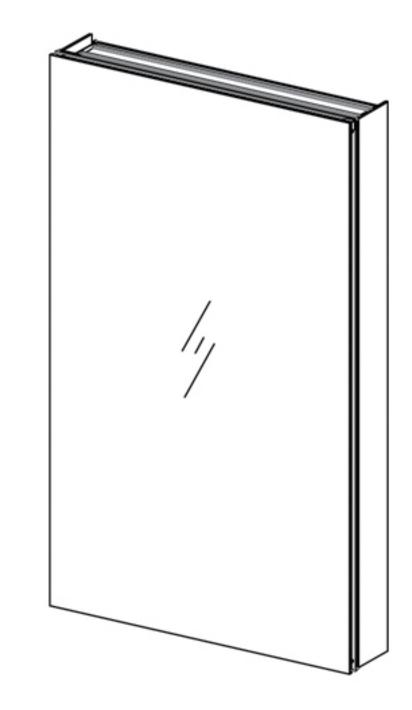

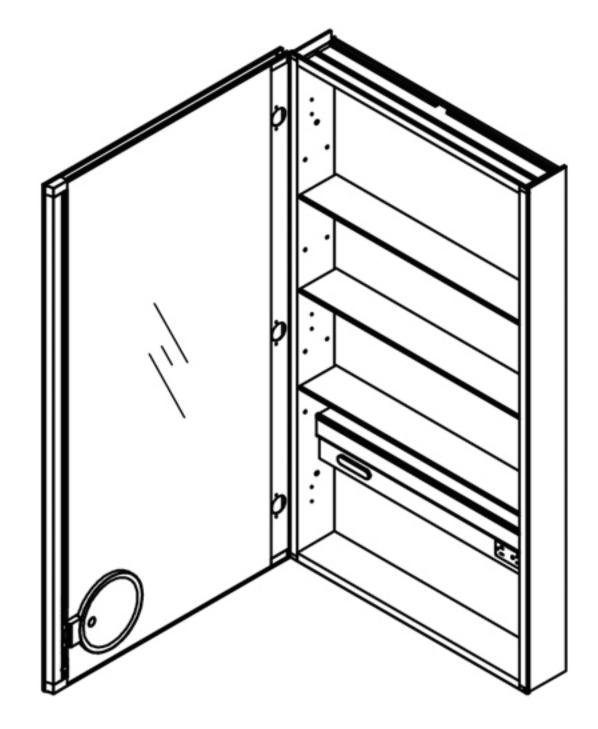

USA/Canada: 800-654-0016

Electrical System Wall Wall • INPUT: 110VAC 2X4 required on all 4 sides • OUTPUT: 110VAC Field wire location as shown in drawing • 1/2" conduit (Ø 7/8" actual) electrical knockout location shown below Included field wire cable clamp Circuit Diagram WHITE WAGO CONNECTOR Electrical 110V <u></u> WAGO CONNECTOR Outlet BALCK WAGO CONNECTOR 5"(127mm) 1"(25mm) **Surface Mount Circuit Diagram Recessed Mount** 24" (608mm) — → 23-1/2"(597mm) -24" (608mm) -39-1/2" (1003mm) 40" (1016mm) 40" (1016mm) Rough-in Depth Minimum 4" (102mm) Required - 9-5/7"-(247mm) 4-1/2" <mark>에</mark>(114mm) Rough-in Dimensions **Cabinet Dimensions** Back of Cabinet - Wire Access Location