60" BARTLETT CAST IRON ROLL TOP TUB

Cat. No. CTR₆₀





L: 60-3/4" W: 30-1/2"

24" (from floor to top of tub) H·

19-1/4" (from bottom of tub to top of tub)

The following is recommended for CTR60 tubs with faucet holes:

- •Tub wall-mounted faucets for hand-held showers: part# 4022, 4025 or 4035
- •Tub wall-mounted faucets for use with risers: part# 4001,4013, 4023, 4030 or 4031
- •Double offset bath supplies: part #5576
- •Leg tub drain: part #5599
- •Complete shower unit: part# 4124, or 4143

Gallon Capacity: 40 Shipping Weight: 500 lbs. Empty Weight: 287 lbs. Filled Weight: 621 lbs.

Features:

- ► Inside finish is white enamel
- ► Cast Iron ball and claw feet
- ► Tub exterior is white (epoxy)
- ►3-¾" centers in tub wall
- ► Non-skid strips
- ► Continuous rolled rim
- ► Feet are attached and leveled before shipment
- ► Tub is thoroughly inspected before shipment

Foot Finishes:

UF Unfinished

BL Painted Black

BQ Painted Bisque **PB** Polished Brass





CP Polished Chrome WH Painted White

PN Polished Nickel SN **Brushed Nickel**

ORB Oil Rubbed Bronze

Custom Colors Available (inside of tub is always white enamel): Painted bathtubs are considered "special order" and are not returnable \$160 Bisque or Black \$250 Designer Color



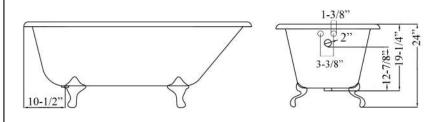

Dimensions of fixture are nominal and may vary within the range of tolerance established by ANSI standard A112.19.2. Dimensions and specifications subject to change with out notice.

TUB FILLER

Cat. No. 4050






L: 4-³/₄" W: 5-¹/₂" D: 3-¹/₄"

Features:

- ► Brass Construction
- ► Old Style Spigot
- ► Compression stems
- ▶ 3-3/8" Centers for tub wall mount installation
- ► Ceramic hot and cold buttond
- ▶¾" Nipples
- ► Metl cross handles
- ► Flow rate is 3.89 GPM
- ► For use with double offset supplies #5576

Finishes:

CP Polished ChromePN Polished NickelBP Polished BrassSN Brushed Nickel



DOUBLE OFFSET BATH SUPPLIES

Cat.No. 5576





H: 24"

OD: ½"

Features:

- ▶ For use with faucets mounted to the tub wall
- ► No Stops
- ▶ ½" Compression inlet
- ▶¾" Compression outlet
- ▶ 0.500" Outer diameter
- ▶ 0.440" Inner diameter
- ▶ 0.030" Thickness of the wall
- ► Availble in 5 finishes


Compliance Certification

Meets or exceeds the following specifications: ASME-A112 (and 19.6M) for Vitreous china fixtures. ASME 112.19.9M for fire clay fixtures.

Finishes:

CP Polished ChromePB Polished BrassORB Oil Rubbed Bronze

PN Polished NickelBN Brushed Nickel

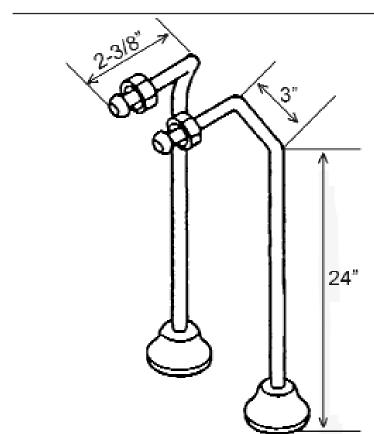

Use on concrete floors requires special installation. We recommend using a plumbing proffessional.

Dimensions and specifications subject to change without notice.

LEG TUB DRAIN

Cat. No. 5599






Escutcheon Height: 1-1/4"

Features:

- ► Brass Construction
- ► Twist-and-lift stopper
- ► Includes deep escutcheon
- ► Height adjustable 15"-18"
- ▶ Depth adjustable 12"-14"
- ► Includes deep escutcheon
- ► Available in 5 Finishes

Finishes:

CP Polished ChromeBP Polished BrassSN Brushed NickelPN Polished NickelORB Oil Rubbed Bronze

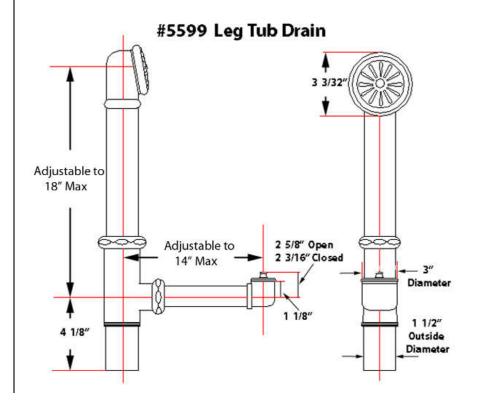

Dimensions and specifications subject to change without notice.