## BROCTON 68" CAST IRON ROLL TOP TUB

Cat. No.





L: 68" W: 30-1/8"

H:  $24-\frac{3}{4}$ " (from floor to top of tub)

19-1/4" (from bottom of tub to top of tub)

# The following is recommended for CTR67 tubs with faucet holes:

- •Tub wall-mounted faucets or hand-held showers: part# **4022**, **4025**, **4035**
- •Tub wall-mounted faucets for use with risers: part# 4001, 4013, 4023, 4030, 0431
- •Double offset bath supplies: part #5576
- ·Leg tub drain: part #5599
- •Complete shower unit: part# 4124, 4143

Gallon Capacity: 57
Shipping Weight: 502 lbs.
Empty Weight: 309 lbs.
Filled Weight: 785 lbs.

### Features:

- ► Inside finish is white enamel
- ► Cast Iron ball and claw feet available in 8 finishes or unfinished
- ► Tub exterior is white (epoxy)
- ► 3-3/8" centers in tub wall
- ► Non-skid strips
- ► Feet are attached and leveled before shipment
- ► Tub is thoroughly inspected before shipment

### Foot Finishes:

**UF** Unfinished

**BL** Painted Black

**BQ** Painted Bisque

**PB** Polished Brass



**CP** Polished Chrome


WH Painted White


PN Polished Nickel

**SN** Brushed Nickel

ORB Oil Rubbed Bronze

**Custom Colors Available** (inside of tub is always white enamel): Painted bathtubs are considered "special order" and are not returnable \$160 Bisque or Black \$250 Designer Color





# RECTANGULAR SHOWER UNIT WITH SIDE WALL SUPPORT

Cat. No. 4192





SIZE	FINISH
48" x 24"	CP, BN, ORB,PB, PN
54" x 24"	PB, CP

### Shower Rod:

L: 48" D: 24" L: 54" D: 24"

Riser Height: 62" Faucet Width: 5-1/4" Wall Support: 18" Ceiling Support: 30"

### Features:

- ► Rectangular shower rod is 3/4" solid brass tubing
- ► Washerless diverter bathcock
- ▶ 3-3/8" Centers for tub wall mount installation
- ► 1/4 Turn compression stems
- ► Flow rate is 4 GPM
- ► Metal lever handles
- ▶ Polished Chrome and Brass have plastic showerheads
- ▶ Brushed Nickel, Polished Nickel and Oil Rubbed Bronze have a metal showerhead
- ► Includes ceiling and wall support assemblies
- ► Side wall support fully reversible (Left or Right)
- ► Supports adjustable by cutting
- ► For use with #5576 double offset supplies (Not Included)
- ► Available with 48" (#4192-48) or 54" (#4192-54)shower rod
- ► Finishes varies by size

#### Finishes:


**CP** Polished Chrome

**PB** Polished Brass

**BN** Brushed Nickel

PN Polished Nickel

**ORB** Oil Rubbed Bronze

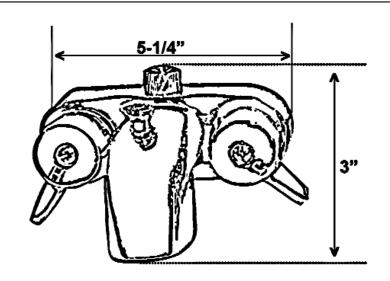

Dimensions are nominal and may vary. Dimensions and specifications subject to change without notice.

# DOUBLE OFFSET BATH SUPPLIES

Cat.No. 5576





H: 24"

OD: ½"

### **Features:**

- ▶ For use with faucets mounted to the tub wall
- ► No Stops
- ▶ 1/2" Compression inlet
- ▶¾" Compression outlet
- ▶ 0.500" Outer diameter
- ▶ 0.440" Inner diameter
- ▶ 0.030" Thickness of the wall
- ► Availble in 5 finishes


### Compliance Certification

Meets or exceeds the following specifications: ASME-A112 (and 19.6M) for Vitreous china fixtures. ASME 112.19.9M for fire clay fixtures.

### Finishes:

CP Polished ChromePB Polished BrassORB Oil Rubbed Bronze

PN Polished NickelBN Brushed Nickel

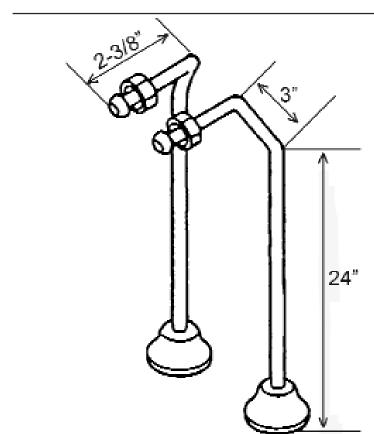

Use on concrete floors requires special installation. We recommend using a plumbing proffessional.

Dimensions and specifications subject to change without notice.

## LEG TUB DRAIN

Cat. No. 5599






Escutcheon Height: 1-1/4"

### **Features:**

- ► Brass Construction
- ► Twist-and-lift stopper
- ► Includes deep escutcheon
- ► Height adjustable 15"-18"
- ▶ Depth adjustable 12"-14"
- ► Includes deep escutcheon
- ► Available in 5 Finishes

### Finishes:

CP Polished ChromeBP Polished BrassSN Brushed NickelPN Polished NickelORB Oil Rubbed Bronze

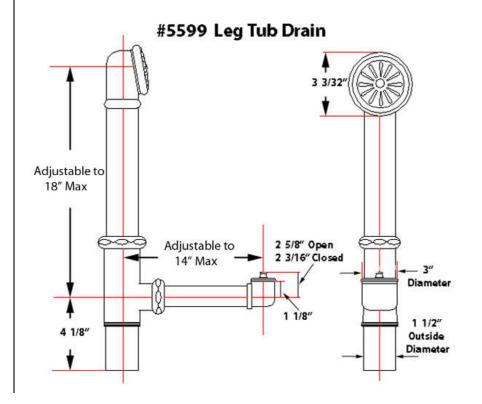

Dimensions and specifications subject to change without notice.