
55" ANTONIO CAST IRON ROLL TOP TUB

Cat. No.

CTRH54

P BARCLAY

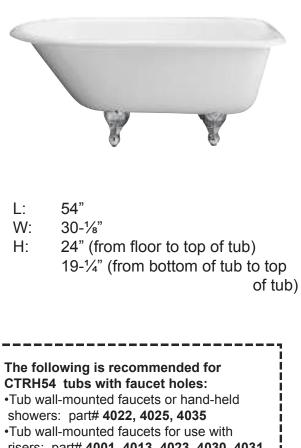

- risers: part# **4001**, **4013**, **4023**, **4030**, **4031** •Double offset bath supplies: part **#5576**
- •Leg tub drain: part **#5599**
- •Complete shower unit: part# **4124, 4143**

Gallon Capacity: Shipping Weight: Empty Weight: Filled Weight:

36 475 lbs. 247 lbs. 547 lbs.




- ► Inside finish is white enamel
- ► Tub exterior is white (epoxy)
- ► 3-3/8" centers in tub wall
- ► Continous rolled rim
- Pre-drilled overflow hole
- Cast Iron ball and claw feet
- ► Non-skid strips
- ► Feet are attached and leveled before shipment
- Tub is thoroughly inspected before shipment


Foot Finishes: UF Unfinished BL Painted Black BQ Painted Bisque PB Polished Brass




- CP Polished Chrome
- WH Painted WhitePN Polished Nickel
- PN Polished NickelSN Brushed Nickel
- ORB Oil Rubbed Bronze
- OKB OII RUDDed Bronze

Custom Colors Available (inside of tub is always white enamel): Painted bathtubs are considered "special order" and are not returnable \$160 Bisque or Black \$250 Designer Color

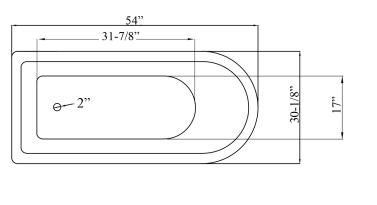





CODE RECTANGULAR SHOWER UNIT

Cat. No.

4198





SIZE	FINISH	
48" x 24"	CP, BN, ORB,PB, PN	
54" x 24"	PB, CP	
Shower Rod:		
L: 48"	D: 24"	
L: 54"	D: 24"	


Riser Height:	56"
Wall Support:	10"
Ceiling Support:	30"
Spout Over-hang:	1³⁄4"
Faucet Body Width:	5½"

Features:

- Rectangular shower rod is ¾ solid brass tubing
- ► Code spout is 4" above handles
- ► 3³/₈" Centers for tub wall mount installation
- Compression stems
- ► Flow rate is 4 GPM
- Metal lever handles
- ► Polished Chrome and Polished Brass have plastic showerhead
- Brushed Nickel, Polished Nickel and Oil Rubbed Bronze have a metal showerhead
- Includes ceiling and wall support assemblies
- Supports adjustable by cutting
- Available with 48" (#4198-48) or 54" (#4198-54) shower rod
- ► Finish varies by size

Finishes:

CP Polished Chrome BN Brushed Nickel PB Polished Brass PN Polished Nickel ORB Oil Rubbed Bronze



Dimensions are nominal and may vary. Dimensions and specifications subject to change without notice.

DOUBLE OFFSET BATH SUPPLIES

Cat.No.



5576

Features:


- ► For use with faucets mounted to the tub wall
- ► No Stops
- ▶ ¹⁄₂" Compression inlet
- ▶ ¾" Compression outlet
- ▶ 0.500" Outer diameter
- ► 0.440" Inner diameter
- ► 0.030" Thickness of the wall
- ► Availble in 5 finishes

Compliance Certification

Meets or exceeds the following specifications: ASME-A112 (and 19.6M) for Vitreous china fixtures. ASME 112.19.9M for fire clay fixtures.

Finishes:

- CP Polished ChromePB Polished BrassORB Oil Rubbed Bronze
- **PN** Polished Nickel **BN** Brushed Nickel

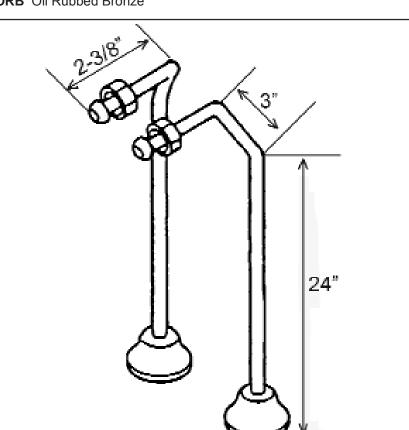

Use on concrete floors requires special installation. We recommend using a plumbing proffessional.

Dimensions and specifications subject to change without notice.



H: 24"

OD: 1/2"

LEG TUB DRAIN

Cat. No.

5599





Escutcheon Height: 1-1/4"

Features:

- ► Brass Construction
- ► Twist-and-lift stopper
- ► Includes deep escutcheon
- ► Height adjustable 15"-18"
- ► Depth adjustable 12"-14"
- ► Includes deep escutcheon
- ► Available in 5 Finishes

Finishes:

- CP Polished Chrome
- **BP** Polished Brass
- SN Brushed Nickel
- PN Polished Nickel
- **ORB** Oil Rubbed Bronze

