BURNEY FREESTANDING THERMOSTATIC TUB FILLER

Cat. No. 7913






1/2" NPT connection under floor

Features:

- ► Gooseneck swivel spout
- ► Flow rate 6 GPM
- ► Rough-In Valve Included
- ► Thermostatic Temperature Control within 1°C
- ► Thermostatic brass cartridge
- ► Push button diverter
- ► Single lever control
- ► Wand Style Hand Shower flow rate 2.5 GPM
- ► Mounts to wood or tile floor
- ► Available in 2 finishes

Finishes:

CP Polished ChromeSN Brushed Nickel

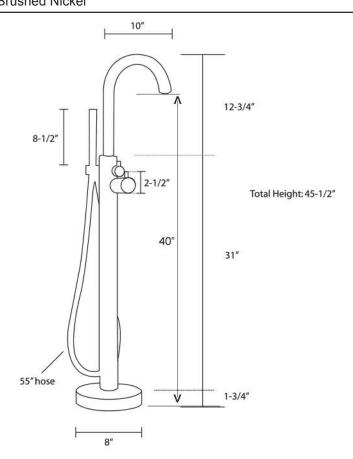

Use on concrete floors requires special installation. We recommend using a plumbing proffessional.

Dimensions are nominal and may vary. Dimensions and specifications subject to change without notice.