

**NICKELBY  
68" ACRYLIC DOUBLE  
SLIPPER TUB**

Cat. No.  
ATDSN68FIG




L: 67-1/4"  
W: 30-3/4"  
H: 25"

Rim: 1-1/2" W  
Water depth: 22-1/4" to top of tub  
Water depth: 15-1/4" to overflow  
Overflow slot: 2-3/4" under tub rim

**The following is recommended for  
ATDSN68F tubs:**

- Faucets: part #7082 or 7088
- Rigid, freestanding supplies: part #4502

Gallon Capacity with OF: 53  
Shipping Weight: 142 lbs.  
Empty Weight: 82 lbs.  
Filled Weight with OF: 525 lbs.

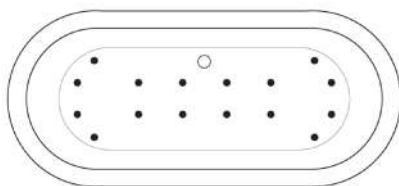

(Air jet configuration if system is added,  
more info on page 2.)

**Features:**

- ▶ Interior and exterior walls acrylic sheets
- ▶ Overflow slot with integrated drain
- ▶ Drain and overflow covers included (available in 7 finishes)
- ▶ Option to add foam insulation between tub walls available
- ▶ Use with a freestanding tub filler
- ▶ No faucet holes
- ▶ Angle slope of tub: 40°
- ▶ 1-1/2" wall thickness
- ▶ Tub is thoroughly inspected before shipment
- ▶ IAPMO Certified
- ▶ **New:** Air jet system now available , more info on page 2







**Finishes:**

- |            |                   |           |                 |
|------------|-------------------|-----------|-----------------|
| <b>CP</b>  | Polished Chrome   | <b>PB</b> | Polished Brass  |
| <b>BN</b>  | Brushed Nickel    | <b>PN</b> | Polished Nickel |
| <b>ORB</b> | Oil Rubbed Bronze | <b>MB</b> | Matte Black     |
| <b>WT</b>  | White             |           |                 |



**Custom Colors Available** (inside of tub is always white enamel):  
Painted bathtubs are considered "special order" and are not returnable  
\$160 Bisque or Black \$250 Designer Color

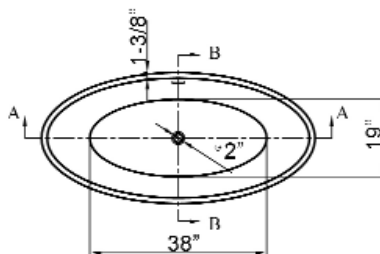

Dimensions of fixture are nominal and specifications subject to change without notice.

# BATHTUB AIR JET KIT

Cat. No.  
AIR KIT 1, AIR KIT 2



- A** AIR JET - Bottom air jets for maximum bubble action.
- B** BLOWER - The heart of the massage system.
- C** MANIFOLD - Double back flow security prevention device.
- D** FLEXIBLE PVC HOISING - IAPMO certified.
- E** MAIN AIR INTAKE HOSE - High temperature and pressure resistant.

## Features:

- ▶ 750 Watt blower motor operates system
- ▶ 300 Watt air heater warms air
- ▶ System powered by 120V
- ▶ 16 brass air jets placed in bottom of tub
- ▶ Each air jet has 24 holes
- ▶ Air jet caps available in white (AIR KIT 1) or black (AIR KIT 2)
- ▶ Includes 1 1/4" x 3' main air hose plus 1 1/4" x 9' extension hose
- ▶ Automatic system purge after each use
- ▶ Automatic safety timer turns off system after 20 minutes
- ▶ Includes water tight remote control
- ▶ Compatible with most acrylic, copper and resin tubs with no feet
- ▶ Not available with cast iron tubs or tubs with feet

Air Kit is installed in tub before shipment

## INSIDE TUB VIEW - WILL VARY BY TUB DESIGN




Air Jet




Remote

**Oval bathtub**  
Sample jet configuration




with end drain




with center drain

**Rectangular bathtub**  
Sample jet configuration




with end drain

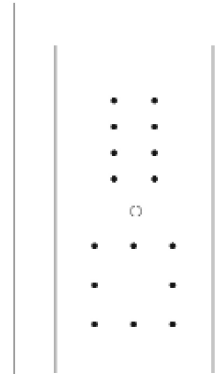

with center drain

**Round bathtub**  
Sample jet configuration



These diagrams are general representations.  
Jet placement may vary dependent on tub shape

### Features:

(16) Maxi Air Jets



Elbows for air jets



Tees for air jets