60" ANTHEA DOUBLE ACRYLIC ROLL TOP TUB

Cat. No.



ADTR60



- L: 60"
- W٠ 30"
- $24-\frac{1}{2}$ " (from floor) H: 18" (from bottom of tub)

Water Depth: 11-1/2" to OF

The following is recomended for ADTR60 tubs

•Tub wall-mounted faucets: #4022, 4025 or 4035 •Double offset bath supplies: Part# 5576 •Leg tub drain: Part# 5599

Do not use with rigid, freestanding supplies

Gallon Capacity:	40
Shipping Weight:	110 lbs.
Empty Weight:	62 lbs.
Filled Weight:	396 lbs.

Features:

- ► Inside finish is either white or bisque to match outside color
- ► Pre-drilled overflow hole
- ► 3-³/₈" centers in tub wall
- Smooth acrylic surface inside and out
- Cast aluminum ball and claw feet
- Tubs ship with feet attached and leveled
- Tubs thoroughly inspected before shipment


Tub Colors WH White BQ Bisque

Foot Finishes

- BQ Bisque
- BL Black
- PB Polished Brass
- CP **Polished Chrome**

Brushed Nickel BN **ORB** Oil Rubbed Bronze PN Polished Nickel WH White

Custom Colors Available (inside of tub is always white enamel): Painted bathtubs are considered "special order" and are not returnable \$160 Bisgue or Black \$250 Designer Color

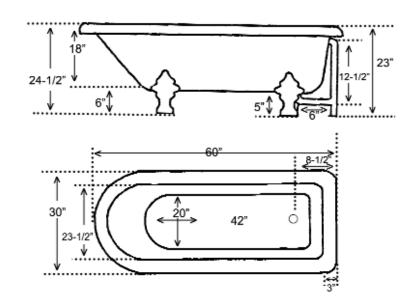

Dimensions are nominal and specifications subject to change without notice.

TUB WALL MOUNTED FAUCET WITH HAND SHOWER

Cat. No.

4025






- 9" W:
- 12-1/2" H:

Depth from back of faucet to front of faucet: 7-1/2"

Depth from wall to front of faucet: 5-1/2"




Features:

- ► Old style spigot
- ► Handheld shower with cradle and 59" Hose
- Backflow preventer on handshower
- ► 3-¾" Centers on tub wall
- Centers can be adjusted out to 9" with use of part **#4501** (Swivel arms)
- ► 1/4 Turn ceramic disc cartridges
- ► Flow rate is 3.8 GPM
- ► Flow rate for handshower is 1.8 GPM
- ► To be used with double offset bath supplies: part #5576
- ► Can be used with freestanding bath supplies part #4502-PL

Finishes:

- CP Polished Chrome
- BP Polished Brass
 - **Brushed Nickel**
- Polished Nickel PN **ORB** Oil Rubbed Bronze

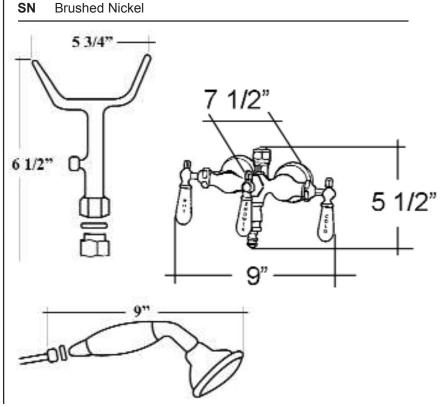

Dimensions are nominal and may vary. Dimensions and speciications subject to change without notice.

DOUBLE OFFSET BATH SUPPLIES

Cat.No.



Compliance Certification

specifications: ASME-A112 (and 19.6M) for Vitreous china

clay fixtures.

Meets or exceeds the following

fixtures. ASME 112.19.9M for fire


5576

Features:

- ► For use with faucets mounted to the tub wall
- ► No Stops
- ▶ ¹⁄₂" Compression inlet
- ▶ ¾" Compression outlet
- ▶ 0.500" Outer diameter
- ▶ 0.440" Inner diameter
- ► 0.030" Thickness of the wall
- ► IAPMO approved
- ► Availble in 5 finishes

Finishes:

- CP Polished Chrome PB **Polished Brass ORB** Oil Rubbed Bronze
- PN Polished Nickel BN
 - **Brushed Nickel**

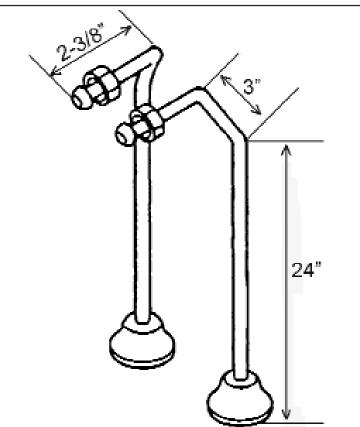

Use on concrete floors requires special installation. We recommend using a plumbing proffessional.

Dimensions and specifications subject to change without notice.



H: 24"

OD: 1/2"

LEG TUB DRAIN

Cat. No.

5599






Escutcheon Height: 1-1/4"

Features:

- ► Twist-and-lift stopper
- ► Includes deep escutcheon
- ► Height adjustable 15"-18"
- ► Depth adjustable 12"-14"
- ► Includes deep escutcheon
- ► IAPMO approved
- ► Available in 5 Finishes

Finishes:

- CP Polished Chrome
- **BP** Polished Brass
- SN Brushed Nickel
- PN Polished Nickel
- **ORB** Oil Rubbed Bronze

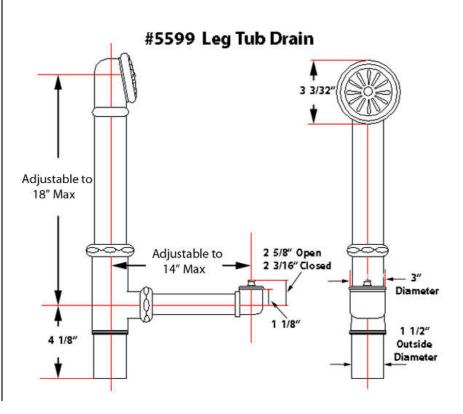

Dimensions and specifications subject to change without notice.