# 67" ASIA DOUBLE ACRYLIC ROLL TOP TUB

Cat. No. ADTR67





L: 67" W: 29"

H: 25" (from floor to top of tub) 18" (from bottom to tub)

Water depth: 11-1/2" to overflow

### The following is recomended for ADTR67 tubs

•Tub wall-mounted faucets: 4022, 4025, or 4035 •Double offset bath supplies: Part# 5576

•Leg tub drain: Part# 5599

Do not use with rigid, freestanding supplies

Gallon Capacity: 50
Shipping Weight: 150 lbs.
Empty Weight: 100 lbs.
Filled Weight: 518 lbs.

#### Features:

- ► Smooth white acrylic surface inside and out
- ▶3" centers in tub wall
- ▶ Pre-drilled overflow hole
- ► Continuous rolled rim
- ► Cast aluminum ball and claw feet
- ► Tubs ship with feet attached and leveled
- ► Tubs thoroughly inspected before shipment




#### **Foot Finishes**


BQ Bisque BL Black

BPPolished BrassCPPolished ChromeBNBrushed NickelORBOil Rubbed Bronze

N Polished Nickel WH White

**Custom Colors Available** (inside of tub is always white enamel): Painted bathtubs are considered "special order" and are not returnable \$160 Bisque or Black \$250 Designer Color







Dimensions are nominal and specifications subject to change without notice.

# CODE RECTANGULAR SHOWER UNIT

Cat. No. 4122





#### **Shower Rod**

L: 48" D: 24"

Riser Height: 62"


Wall Support: 10" Adjustable Ceiling Support: 30" Adjustable

#### Features:

- ▶¾" Solid brass tubing
- ► Code gooseneck spout
- ►3-3/8" Centers
- ▶ 1/4 Turn ceramic disc cartridges
- ► Flow rate 3.68 GPM
- ► Porcelain lever handles
- ► Rectangular shower rod and riser included
- ► Includes ceiling and wall support assemblies
- ► Supports are adjustable by cutting
- ► Does Not include showerhead
- ► For acrylic tub use only
- ► For cast iron tub use Part# 4124

#### Finishes:

**CP** Polished Chrome **BP** Polished Brass **SN** Brushed Nickel

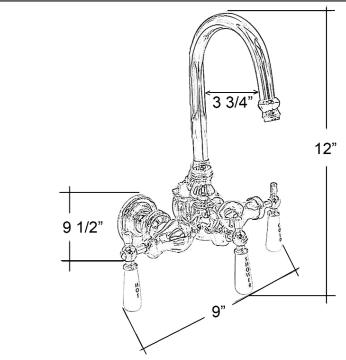

Dimensions are nominal and may vary. Dimensions and specifications subject to change without notice.

## DOUBLE OFFSET BATH SUPPLIES

Cat.No. 5576





**H:** 24"

OD: ½"

#### **Features:**

- ▶ For use with faucets mounted to the tub wall
- ► No Stops
- ▶ 1/2" Compression inlet
- ▶¾" Compression outlet
- ▶ 0.500" Outer diameter
- ▶ 0.440" Inner diameter
- ▶ 0.030" Thickness of the wall
- ► IAPMO approved
- ► Availble in 5 finishes


Compliance Certification

Meets or exceeds the following specifications: ASME-A112 (and 19.6M) for Vitreous china fixtures. ASME 112.19.9M for fire clay fixtures.

#### Finishes:

CP Polished ChromePB Polished BrassORB Oil Rubbed Bronze

PN Polished NickelBN Brushed Nickel

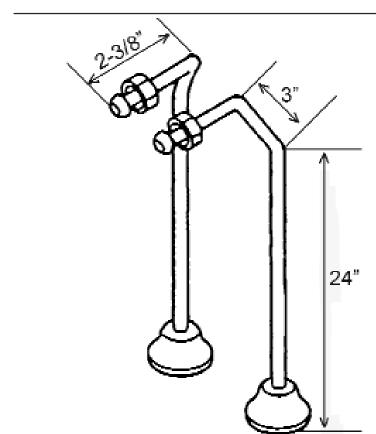

Use on concrete floors requires special installation. We recommend using a plumbing proffessional.

Dimensions and specifications subject to change without notice.

### LEG TUB DRAIN

Cat. No. 5599






Escutcheon Height: 1-1/4"

#### Features:

- ► Twist-and-lift stopper
- ► Includes deep escutcheon
- ► Height adjustable 15"-18"
- ▶ Depth adjustable 12"-14"
- ► Includes deep escutcheon
- ►IAPMO approved
- ► Available in 5 Finishes

#### Finishes:

CP Polished ChromeBP Polished BrassSN Brushed NickelPN Polished NickelORB Oil Rubbed Bronze

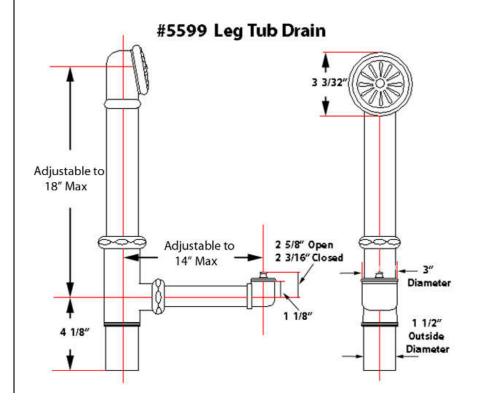

Dimensions and specifications subject to change without notice.