67" ASIA DOUBLE ACRYLIC ROLL TOP TUB

Cat. No. ADTR67





L: 67" W: 29"

H: 25" (from floor to top of tub) 18" (from bottom to tub)

Water depth: 11-1/2" to overflow

The following is recomended for ADTR67 tubs

•Tub wall-mounted faucets: 4022, 4025, or 4035 •Double offset bath supplies: Part# 5576

•Leg tub drain: Part# 5599

Do not use with rigid, freestanding supplies

Gallon Capacity: 50
Shipping Weight: 150 lbs.
Empty Weight: 100 lbs.
Filled Weight: 518 lbs.

Features:

- ► Smooth white acrylic surface inside and out
- ▶ 3" centers in tub wall
- ▶ Pre-drilled overflow hole
- ► Continuous rolled rim
- ► Cast aluminum ball and claw feet
- ► Tubs ship with feet attached and leveled
- ► Tubs thoroughly inspected before shipment




Foot Finishes


BQ Bisque BL Black

BPPolished BrassCPPolished ChromeBNBrushed NickelORBOil Rubbed Bronze

N Polished Nickel WH White

Custom Colors Available (inside of tub is always white enamel): Painted bathtubs are considered "special order" and are not returnable \$160 Bisque or Black \$250 Designer Color







Dimensions are nominal and specifications subject to change without notice.

TUB WALL MOUNTED FAUCET WITH HAND SHOWER

Cat. No. 4025






W: 9"

H: 12-1/2"

Depth from back of faucet to front of faucet: $7-\frac{1}{2}$ "

Depth from wall to front of faucet: 5-1/2"




Features:

- ► Old style spigot
- ► Handheld shower with cradle and 59" Hose
- ► Backflow preventer on handshower
- ►3-3/8" Centers on tub wall
- ► Centers can be adjusted out to 9" with use of part #4501 (Swivel arms)
- ► 1/4 Turn ceramic disc cartridges
- ► Flow rate is 3.8 GPM
- ► Flow rate for handshower is 1.8 GPM
- ➤ To be used with double offset bath supplies: part #5576
- ► Can be used with freestanding bath supplies part #4502-PL

Finishes:

CP	Polished Chrome	PN	Polished Nickel
BP	Polished Brass	ORB	Oil Rubbed Bronze
SN	Brushed Nickel		

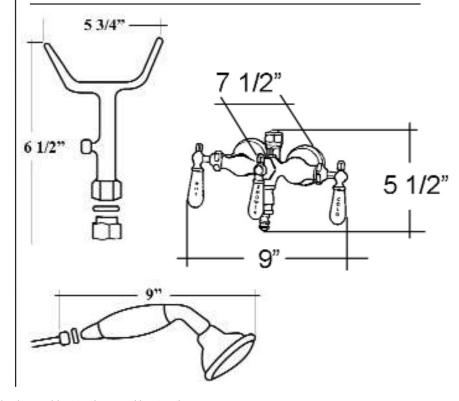

www.barclayproducts.com

Dimensions are nominal and may vary. Dimensions and specifications subject to change without notice.

DOUBLE OFFSET BATH SUPPLIES

Cat.No. 5576





H: 24"

OD: ½"

Features:

- ▶ For use with faucets mounted to the tub wall
- ► No Stops
- ▶ 1/2" Compression inlet
- ▶¾" Compression outlet
- ▶ 0.500" Outer diameter
- ▶ 0.440" Inner diameter
- ▶ 0.030" Thickness of the wall
- ► IAPMO approved
- ► Availble in 5 finishes


Compliance Certification

Meets or exceeds the following specifications: ASME-A112 (and 19.6M) for Vitreous china fixtures. ASME 112.19.9M for fire clay fixtures.

Finishes:

CP Polished ChromePB Polished BrassORB Oil Rubbed Bronze

PN Polished NickelBN Brushed Nickel

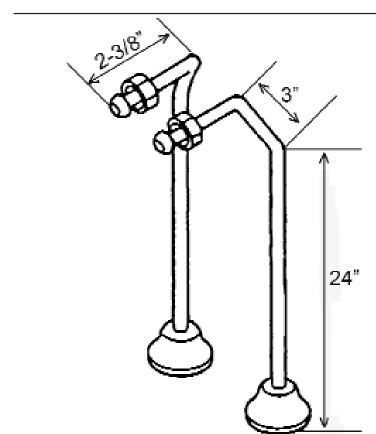

Use on concrete floors requires special installation. We recommend using a plumbing proffessional.

Dimensions and specifications subject to change without notice.

LEG TUB DRAIN

Cat. No. 5599






Escutcheon Height: 1-1/4"

Features:

- ► Twist-and-lift stopper
- ► Includes deep escutcheon
- ► Height adjustable 15"-18"
- ▶ Depth adjustable 12"-14"
- ► Includes deep escutcheon
- ►IAPMO approved
- ► Available in 5 Finishes

Finishes:

CP Polished ChromeBP Polished BrassSN Brushed NickelPN Polished NickelORB Oil Rubbed Bronze

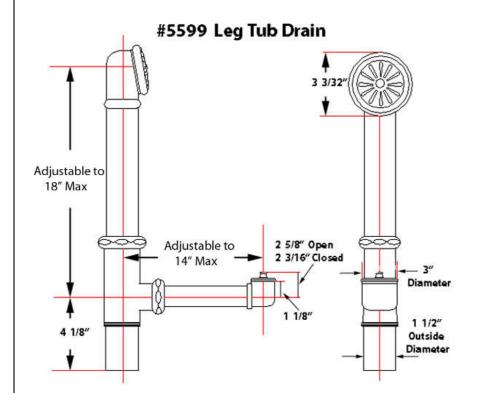

Dimensions and specifications subject to change without notice.