60" ESTELLE ACRYLIC SLIPPER TUB

Cat. No.





L: 60" W: 30"

H: 21" (from floor) short end

31" (from floor) tall end

12" (from bottom of tub) short end

22" (from bottom of tub) tall end

Water Depth:11-1/2" to overflow

The following is recommended for ATS60 slipper tubs:

•Faucets: part #4602, 4604 or 7082 Freestanding Bath Supplies: #4502

•Leg tub drain: part #5599

Gallon Capacity: 33
Shipping Weight: 120 lbs.
Empty Weight: 62 lbs.
Filled Weight: 338 lbs.

Features:

- ► Inside finish is either white or bisque to match outside color
- ▶ Pre-drilled overflow hole
- ► No faucet holes with flat rim
- Outside is textured fiberglass reinforced polyester coated with two-part epoxy
- ► Aluminum ball and claw feet
- ► Feet are attached and leveled before shipment
- ► Tub is thoroughly inspected before shipment




Tub Colors

WH White BQ Bisque

Foot Finishes

BQBisqueBNBrushed NickelBLBlackORBOil Rubbed BronzePBPolished BrassPNPolished NickelCPPolished ChromeWHWhite

Custom Colors Available (inside of tub is always white enamel): Painted bathtubs are considered "special order" and are not returnable \$160 Bisque or Black \$250 Designer Color

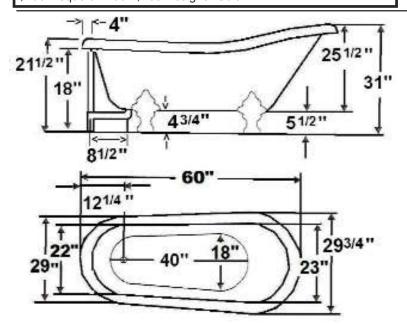

Dimensions of fixture are nominal and specifications subject to change without notice.

TUB WALL MOUNT FILLER WITH HANDSHOWER


Cat. No. 4602







Adjustable Swivel Mounts



Features:


- ▶ Brass construction
- ► Elephant spout length is 5-3/4"
- ► Flow rate is 3.7 GPM
- ► Available with porcelein lever (4602-PL) or metal cross handles (4602-MC)
- ► Telephone handshower with cradle and hose
- ► Handshower flow rate 2.5 GPM
- ► Handshower includes backflow preventer
- ► Swivel mounts adjust centers from 3" to 12"
- ► Faucet centers are 7" without swivel mounts
- ► For tub wall mount installation
- ► ¼ turn ceramic disc cartridges
- ►IAPMO approved
- ► To be used with double offset bath supplies, Part #5576
- ► This faucet can also be used with rigid freestanding supplies, Part #4502 with adjustable swivel mounts removed

Finishes:

BP Polished Brass
CP Polished Chrome
ORB Oil Rubbed Bronze

SN Brushed Nickel **PN** Polished Nickel





Dimensions are nominal and may vary. Dimensions and specifications subject to change without notice.

09/21/2018

FREESTANDING BATH SUPPLIES

Cat. No. 4502-PL



▶ 0.800" Outer diameter

▶ 0.595" Inner diameter

▶ 0.090" Thickness of wall



H: 30" (30-1/2" with nut)



Features:

- ▶ 5" Shaft included
- ► Stops included
- ► ½" Pipe thread inlet
- ▶¾" Flare outlet
- ► Wall support assemblies included
- ► Porcelain lever handles
- ► IAPMO approved
- ► Available in 5 finishes
- ► Should not be used with leg tubs that have factory drilled holes.


Finishes:

CP Polished Chrome

PN Polished NickelBP Polished Brass

ORB Oil Rubbed Bronze

SN Brushed Nickel

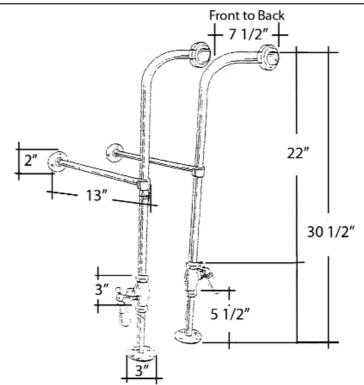

Use on concrete floors requires special installation. We recommend using a plumbing proffessional.

Dimensions are nominal and may vary. Dimensions and specifications subject to change without notice.

LEG TUB DRAIN

Cat. No. 5599






Escutcheon Height: 1-1/4"

Features:

- ► Twist-and-lift stopper
- ► Includes deep escutcheon
- ► Height adjustable 15"-18"
- ▶ Depth adjustable 12"-14"
- ► Includes deep escutcheon
- ►IAPMO approved
- ► Available in 5 Finishes

Finishes:

CP Polished ChromeBP Polished BrassSN Brushed NickelPN Polished NickelORB Oil Rubbed Bronze

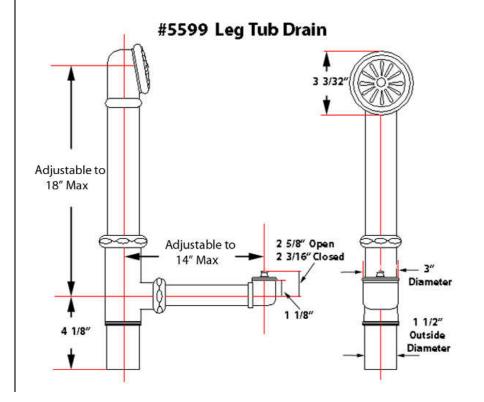

Dimensions and specifications subject to change without notice.

"D" SHAPED SHOWER ROD

Cat. No. 4145





Features:

- ▶ 1" Solid brass tubing
- ► Includes rectangular flanges(#300)
- ► Includes two "D" rod loop connectors (#331)
- ► Available In 3 Sizes: 48", 54", and 60" (#4145-48, #4145-54, and #4145-60)
- ► All rods come as four pieces
- ► Ceiling Supports Available (#340)
- ► Available in 5 finishes



"D" Rod Loop Connector

Finishes:

CP Polished Chrome

SN Brushed Nickel


BP Polished Brass

ORB Oil Rubbed Bronze

PN Polished Nickel



Rectangular Flange

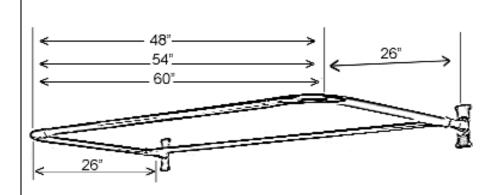

Measurements Show Different Lengths For Each Size Rod.

Dimensions are nominal and may vary. Dimensions and specifications are subject to change without notice.