BROCTON 68" CAST IRON ROLL TOP TUB

Cat. No.





L: 68" W: 30-1/8"

H: $24-\frac{3}{4}$ " (from floor to top of tub)

19-1/4" (from bottom of tub to top of tub)

The following is recommended for CTR67 tubs with faucet holes:

- •Tub wall-mounted faucets or hand-held showers: part# **4022**, **4025**, **4035**
- •Tub wall-mounted faucets for use with risers: part# 4001, 4013, 4023, 4030, 0431
- •Double offset bath supplies: part #5576
- ·Leg tub drain: part #5599
- •Complete shower unit: part# 4124, 4143

Gallon Capacity: 57
Shipping Weight: 502 lbs.
Empty Weight: 309 lbs.
Filled Weight: 785 lbs.

Features:

- ► Inside finish is white enamel
- ► Cast Iron ball and claw feet available in 8 finishes or unfinished
- ► Tub exterior is white (epoxy)
- ► 3-3/8" centers in tub wall
- ► Non-skid strips
- ► Feet are attached and leveled before shipment
- ► Tub is thoroughly inspected before shipment

Foot Finishes:

UF Unfinished

BL Painted Black

BQ Painted Bisque

PB Polished Brass



CP Polished Chrome


WH Painted White


PN Polished Nickel

SN Brushed Nickel

ORB Oil Rubbed Bronze

Custom Colors Available (inside of tub is always white enamel): Painted bathtubs are considered "special order" and are not returnable \$160 Bisque or Black \$250 Designer Color





RECTANGULAR SHOWER UNIT WITH SIDE WALL SUPPORT

Cat. No. 4192





| SIZE | FINISH |
|-----------|--------------------|
| 48" x 24" | CP, BN, ORB,PB, PN |
| 54" x 24" | PB, CP |

Shower Rod:

L: 48" D: 24" L: 54" D: 24"

Riser Height: 62" Faucet Width: 5-1/4" Wall Support: 18" Ceiling Support: 30"

Features:

- ► Rectangular shower rod is 3/4" solid brass tubing
- ► Washerless diverter bathcock
- ▶ 3-3/8" Centers for tub wall mount installation
- ► 1/4 Turn compression stems
- ► Flow rate is 4 GPM
- ► Metal lever handles
- ▶ Polished Chrome and Brass have plastic showerheads
- ▶ Brushed Nickel, Polished Nickel and Oil Rubbed Bronze have a metal showerhead
- ► Includes ceiling and wall support assemblies
- ► Side wall support fully reversible (Left or Right)
- ► Supports adjustable by cutting
- ► For use with #5576 double offset supplies (Not Included)
- ► Available with 48" (#4192-48) or 54" (#4192-54)shower rod
- ► Finishes varies by size

Finishes:


CP Polished Chrome

PB Polished Brass

BN Brushed Nickel

PN Polished Nickel

ORB Oil Rubbed Bronze

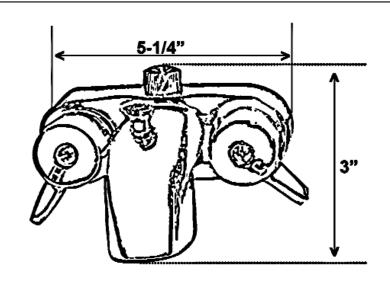

Dimensions are nominal and may vary. Dimensions and specifications subject to change without notice.

DOUBLE OFFSET BATH SUPPLIES

Cat.No. 5576





H: 24"

OD: 1/2"

Features:

- ▶ For use with faucets mounted to the tub wall
- ► No Stops
- ▶ 1/2" Compression inlet
- ▶¾" Compression outlet
- ▶ 0.500" Outer diameter
- ▶ 0.440" Inner diameter
- ▶ 0.030" Thickness of the wall
- ► IAPMO approved
- ► Availble in 5 finishes


Compliance Certification

Meets or exceeds the following specifications: ASME-A112 (and 19.6M) for Vitreous china fixtures. ASME 112.19.9M for fire clay fixtures.

Finishes:

CP Polished ChromePB Polished BrassORB Oil Rubbed Bronze

PN Polished NickelBN Brushed Nickel

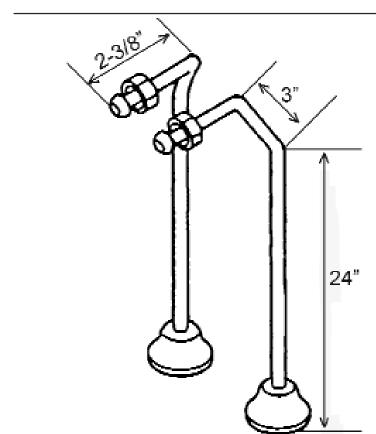

Use on concrete floors requires special installation. We recommend using a plumbing proffessional.

Dimensions and specifications subject to change without notice.

LEG TUB DRAIN

Cat. No. 5599






Escutcheon Height: 1-1/4"

Features:

- ► Twist-and-lift stopper
- ► Includes deep escutcheon
- ► Height adjustable 15"-18"
- ▶ Depth adjustable 12"-14"
- ► Includes deep escutcheon
- ►IAPMO approved
- ► Available in 5 Finishes

Finishes:

CP Polished ChromeBP Polished BrassSN Brushed NickelPN Polished NickelORB Oil Rubbed Bronze

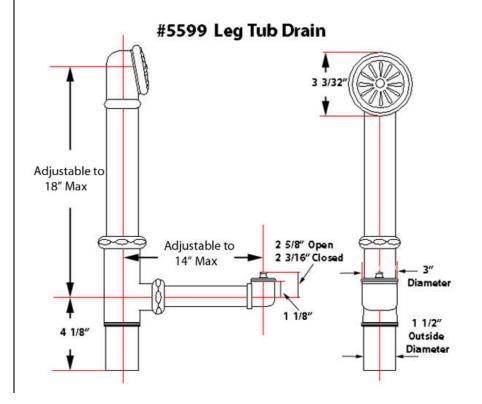

Dimensions and specifications subject to change without notice.