




On piece 1, secure the catch (L) using screws (C). Use the pre-drilled holes for guidance.

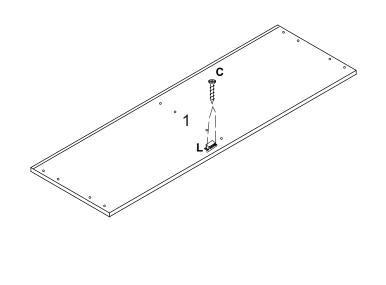



Α		20	PCS
		30	PC5
В	B	30	PCS
С	Cum	2	PCS
D	⊕ 1111111111>	6	PCS
Е	€ ww	48	PCS
F	<i>⊕11111111</i> 11>	16	PCS
G	(Summino)	2	PCS
Н	Оппр	2	PCS
I		2	PCS
J		2	PCS
K		2	PCS




Attach piece 7 to piece 9 using screw (D), insert hardware parts (S) into piece 9.






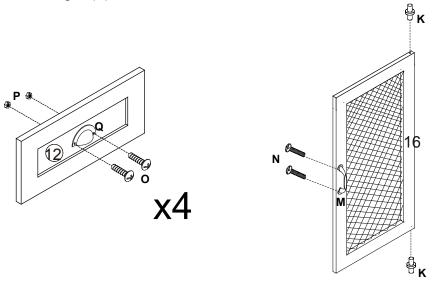


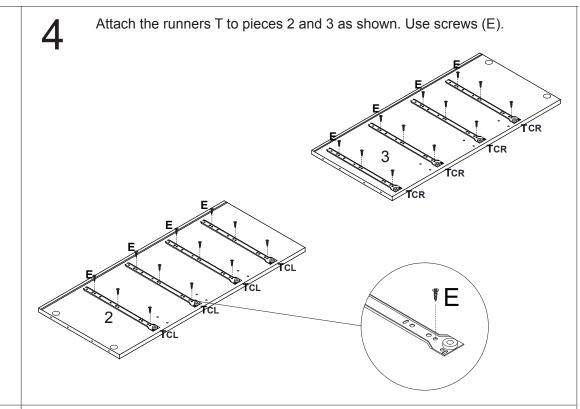




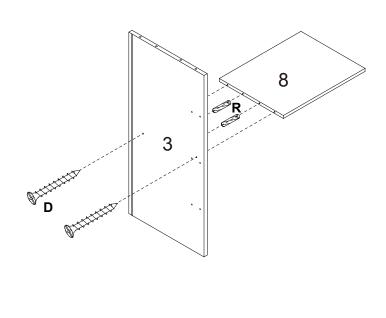


Attach section to piece 5 6 & 7 using wooden dowels (R), screw (D), cam dowels (A) and cam locks (B).



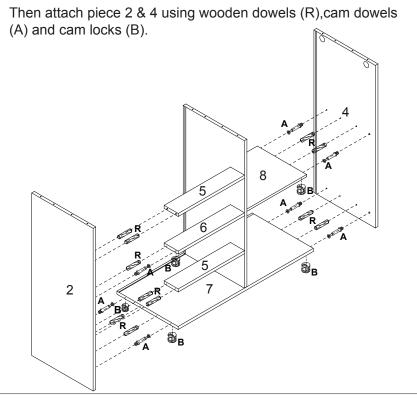


Slot in piece 10 to the built-in ridges, then add piece 1 to the unit using wooden dowels (R), cam dowels (A) and cam locks (B). Connect door 16 using bar hinges (G).

Attach pieces 11, 13 & 14 using screws (F). Make sure that the built-in ridge is facing inwards and at the bottom.

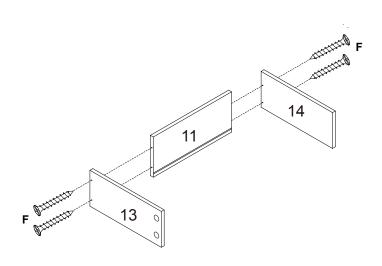

Slot piece 15 into the ridges. First insert the cam locks (B) into the pre-drilled holes on parts 13 & 14. Then insert cam dowels(A) into each side, you then need to line up these screws with the pre-drilled holes on the front piece (12). Once attached, tighten the cam locks (B) using a cross-head screwdriver and ensure the piece is secure.

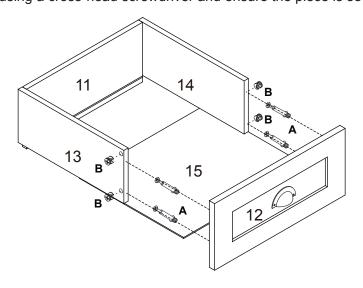

8

