


BROMIC **SMART-HEAT™**

ranges, all Bromic outdoor heaters are designed and engineered in-house and are constructed from premium materials to create products that strike the perfect balance between performance, reliability and beauty.




PLATINUM **SMART-HEAT** GAS

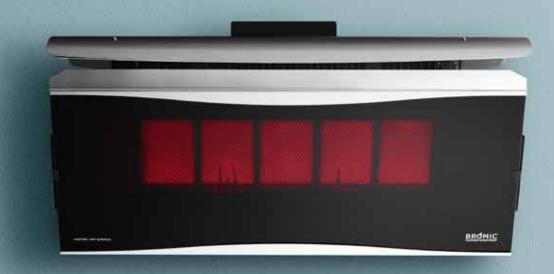

The Platinum Smart-Heat™ Gas heater series spreads heat and comfort evenly in all areas, with a soft and soothing red glow. Built with pure premium materials and designed with elegance, there is no compromise on performance, reliability and beauty.






PLATINUM SMART-HEAT[™] ELECTRIC



Available in black and white, our Platinum Smart-Heat™ Electric heater is specifically suited for low-clearance and design-focused spaces in mind. This slim-line, stainless steel unit spreads comfort evenly in its space, all while minimizing light emission and blending seamlessly into the background with our recess mounting solutions.



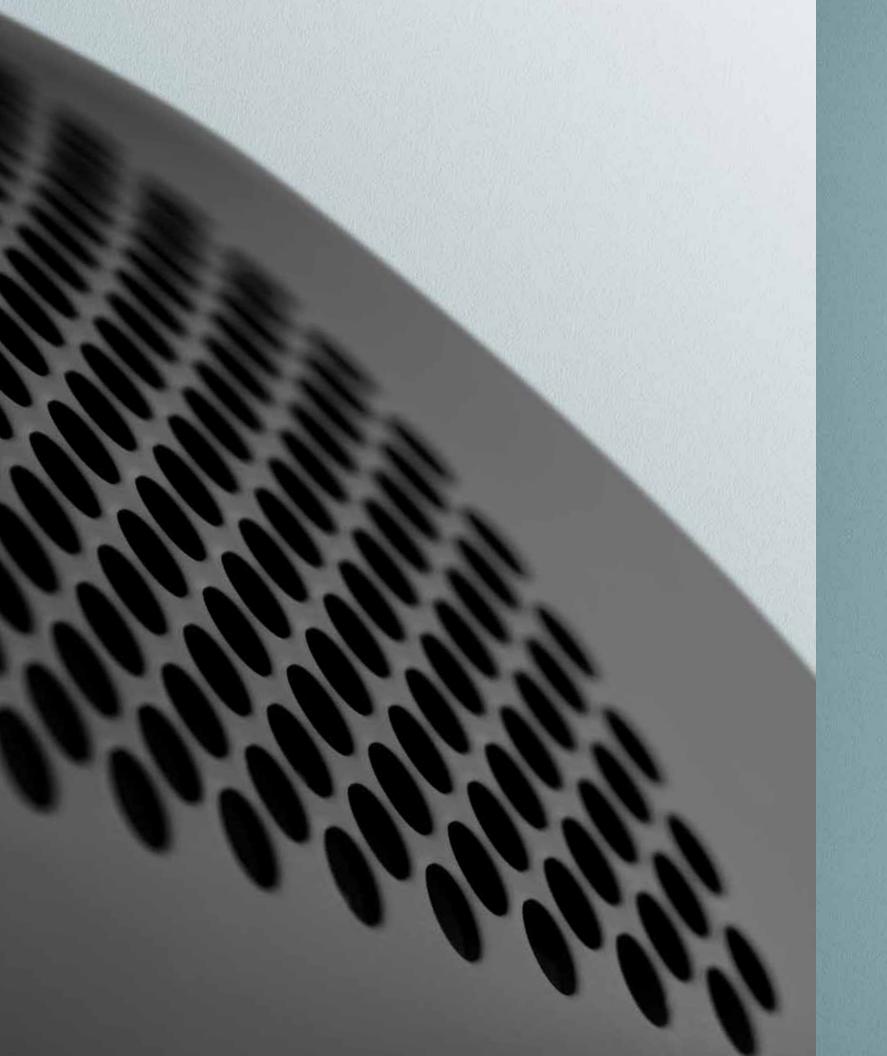

TUNGSTEN SMART-HEAT[™] GAS



Our Tungsten Smart-Heat™ Gas heater has a durable, soft flowing curved facia and engineered body, which produces formidable heat to create a truly comfortable outdoor space. Its easy pivot arm allows for greater positioning and directional heat control. This heater also has a range of accessories available to provide versatility in mounting & controller options.



TUNGSTEN SMART-HEAT™ ELECTRIC

Jiwa and the state of the state

Our Tungsten Smart-Heat™ Electric series offers high performance radiant heating to outdoor and semi-enclosed spaces alike, with an industrial design style. It also boasts a high-temperature coating to suit all environments. With a stainless-steel construction, its durable element will emit a soft red glow to create a warm ambience in your space.



TUNGSTEN SMART-HEAT™ PORTABLE

It's neutral black finish, and award-winning design makes it a piece of modern art. The Tungsten Smart-Heat™ Portable heater offers efficient directional heat and a versatile heating solution for the outdoor settings. It's modular construction with built-in wheels allows for easily maneuverability throughout tighter spaces.

SMART-HEAT™ WIRELESS CONTROLLERS

With the option to connect groups of heaters from a single point as well as dimming heating outputs, the Smart-Heat™ range of controllers provide a simple, yet powerful solution to controlling your environment.

Learn more about our wireless control options bromic.com/gowireless



DESIGN SERVICE

As part of our complementary service, Bromic Heating Specialists will custom design and tailor a solution to best heat your outdoor living and entertainment spaces.

Learn more about our design service bromic.com/designservice



PLATINUM


SMART-HEAT™ GAS


MODEL NUMBER	300 SERIES	500 SERIES
PRODUCT CODE	BH0110002-1 BH0110001-1	BH0110004-1 BH0110003-1
FUEL TYPE	LPG NG	LPG NG
COLOR	BLACK	BLACK
HEAT AREA	160FT ²	215FT ²
ELECTRICAL CONNECTION	110V/2A	110V/2A
MINIMUM FLOOR CLEARANCE	96"	96"
MOUNTING OPTIONS		
CEILING MOUNT	Χ	X
WALL MOUNT	Χ	X
RECESSED FLUSH MOUNT	-	-
CEILING POLE MOUNT	Х	X
FREESTANDING	-	-
CONTROL OPTIONS		
ON OFF	Χ	X
DIMMER	-	-
MASTER REMOTE	-	-


Measurements displayed within this catalogue are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this catalogue are displayed in inches.

PRODUCT MEASUREMENTS

500 SERIES










PRODUCT MEASUREMENTS WITH HEAT DEFLECTOR

500 SERIES









WALL MOUNT CLEARANCE

WALL MOUNT OPTIONS

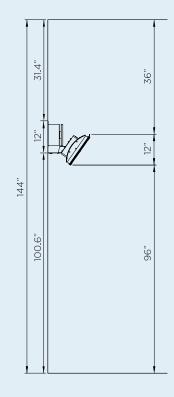


WALL MOUNT CLEARANCE WITH HEAT DEFLECTOR




CEILING POLE CLEARANCE


CEILING MOUNT OPTIONS



CEILING POLE CLEARANCE WITH HEAT DEFLECTOR

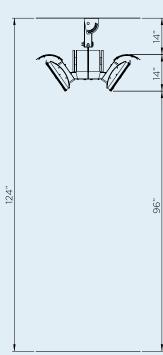

BRACKET MEASUREMENTS



PLATINUM


SMART-HEAT™ ELECTRIC

MODEL NUMBER	2300W SERIES	3400W SERIES	
PRODUCT CODE	BH0320003 BH0320007	BH0320005 BH0320008	
FUEL TYPE	ELECTRIC	ELECTRIC	
COLOR	BLACK WHITE	BLACK WHITE	
HEAT AREA	65FT ²	108FT ²	
RATED CURRENT"	230 - 240V/9.6A	230 - 240V/14.2A	
MINIMUM FLOOR CLEARANCE	WALL 72" CEILING 96"	WALL 72" CEILING 96"	
MOUNTING OPTIONS			
CEILING MOUNT	X	X	
WALL MOUNT	X	X	
RECESSED FLUSH MOUNT	X	X	
CEILING POLE MOUNT	X	X	
FREESTANDING	-	-	
CONTROL OPTIONS			
ON OFF	X	X	
DIMMER	X	X	
MASTER REMOTE *	X	X	


Measurements displayed within this catalogue are minimum requirements for installation. Bromic takes no responsibility

for incorrect or non-compliant installations. All measurement in this catalogue are displayed in ft and inches.

CEILING RECESS FRAME 2300W




CEILING RECESS FRAME 3400W





MINIMUM CAVITY OPTION 1







MINIMUM CAVITY OPTION 2





CEILING MOUNT CLEARANCE

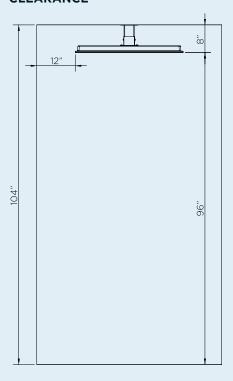


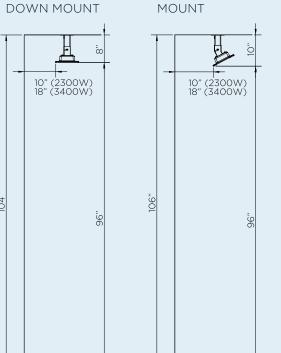

CEILING POLE CLEARANCE


ANGLE

FRONT

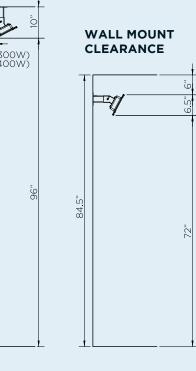


PRODUCT MEASUREMENTS

3400W






BRACKET MEASUREMENTS



10" (2300W) 18" (3400W)

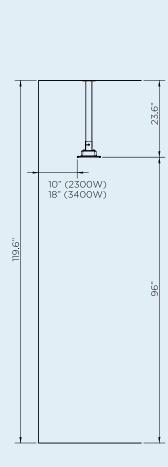

^{*} Control up to six zones of heaters with unlimited heaters per zone from a single control. Works only with dimming controllers. Control operates within 100 ft. of heaters

^{**} Available in varying voltages: 220/240v

TUNGSTEN


SMART-HEAT™ GAS

MODEL NUMBER	300 SERIES	500 SERIES	
PRODUCT CODE	BH0210002-1 BH0210001-1	BH0210004-1 BH0210003-1	
FUEL TYPE	LPG NG	LPG NG	
COLOR	BLACK	BLACK	
HEAT AREA	160FT ²	215FT ²	
ELECTRICAL CONNECTION	110V/2A	110V/2A	
MINIMUM FLOOR CLEARANCE	96"	96"	
MOUNTING OPTIONS			
CEILING MOUNT	X	X	
WALL MOUNT	Χ	Χ	
RECESSED FLUSH MOUNT	-	-	
CEILING POLE MOUNT	X	Χ	
FREESTANDING	-	-	
CONTROL OPTIONS			
ON OFF	X	Χ	
DIMMER	-	-	
MASTER REMOTE	-	-	


Measurements displayed within this catalogue are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this catalogue are displayed in inches.


PRODUCT MEASUREMENTS

500 SERIES




300 SERIES







PRODUCT MEASUREMENTS WITH HEAT DEFLECTOR

500 SERIES




300 SERIES






WALL MOUNT CLEARANCE

WALL MOUNT CLEARANCES

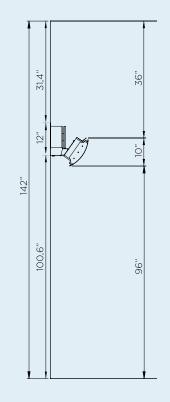


WALL MOUNT CLEARANCE WITH HEAT DEFLECTOR




CEILING POLE CLEARANCE


CEILING MOUNT CLEARANCES

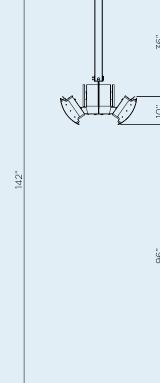

CEILING POLE CLEARANCE WITH HEAT DEFLECTOR

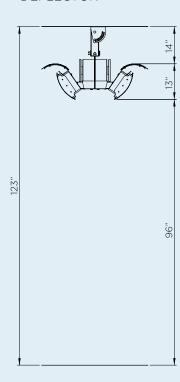

BRACKET MEASUREMENTS



TUNGSTEN

SMART-HEAT™ ELECTRIC

MODEL NUMBER	2000 SERIES	3000 SERIES	4000 SERIES	6000 SERIES
PRODUCT CODE	BH0420030	BH0420031	BH0420032 BH0420012	BH0420033 BH0420013
FUEL TYPE	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC
COLOR	BLACK	BLACK	BLACK WHITE	BLACK WHITE
HEAT AREA	65FT ²	100FT ²	130FT ²	160FT ²
RATED CURRENT"	230 - 240V/8.3A	230 - 240V/12.5A	230 - 240V/16.6A	230 - 240V/25A
MINIMUM FLOOR CLEARANCE"	WALL 72"	CEILING 96"	WALL 72	2" CEILING 96"
MOUNTING OPTIONS				
CEILING MOUNT	X	X	X	X
WALL MOUNT	X	X	X	X
RECESSED FLUSH MOUNT	X	X	X	X
CEILING POLE MOUNT	X	X	X	X
FREESTANDING	-	-	-	-
CONTROL OPTIONS				
ON OFF	X	X	Χ	Χ
DIMMER	Χ	X	Χ	Χ
MASTER REMOTE	Χ	X	Χ	Χ


Measurements displayed within this catalogue are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this catalogue are displayed in inches.


CEILING RECESS




CEILING RECESS FRAME


2000W & 4000W



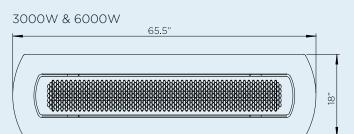


2000W & 4000W






CEILING POLE SUSPENSION CLEARANCE

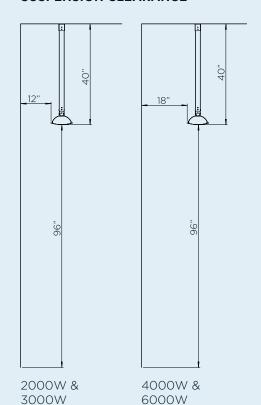


CEILING & WALL CLEARANCE

4000W & 6000W

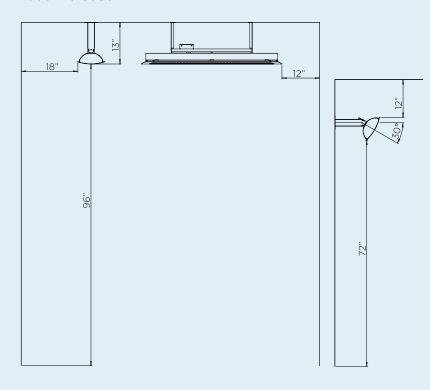


PRODUCT MEASUREMENTS




3000W & 6000W



2000W & 4000W




BRACKET MEASUREMENTS



CEILING & WALL CLEARANCE

2000W & 3000W

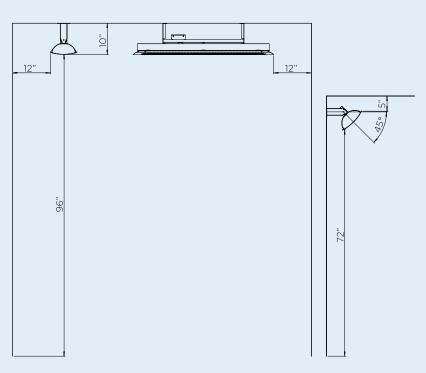

^{*} Control up to six zones of heaters with unlimited heaters per zone from a single control. Works only with dimming controllers. Control operates within 100 ft. of heaters

^{**} Available in varying voltages: 240V, 208V and 277V

^{***} Minimum Mounting hight to ground for Canada - 96" (8')

TUNGSTEN

SMART-HEAT™ PORTABLE

MODEL NUMBER

PRODUCT CODE	BH0510001
FUEL TYPE	LPG NG
COLOR	BLACK
HEAT AREA	215FT ²
ELECTRICAL CONNECTION	-
MINIMUM CEILING CLEARANCE	36"
MOLINTING OPTIONS	


MOUNTING OPTIONS

CEILING MOUNT	-	
WALL MOUNT	-	
RECESSED FLUSH MOUNT	-	
CEILING POLE MOUNT	-	
FREESTANDING	X	


CONTROL OPTIONS

ON OFF	-
DIMMER	-
MASTER REMOTE	_


Measurements displayed within this catalogue are minimum requirements for installation. Bromic takes no responsibility for incorrect or oncompliant installations. All measurement in this catalogue are displayed in inches.

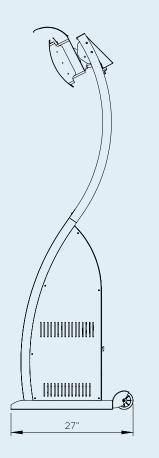


PRODUCT **MEASUREMENTS**

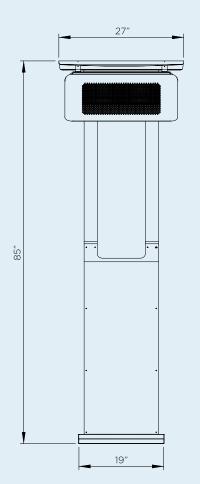

WALL & CEILING CLEARANCE

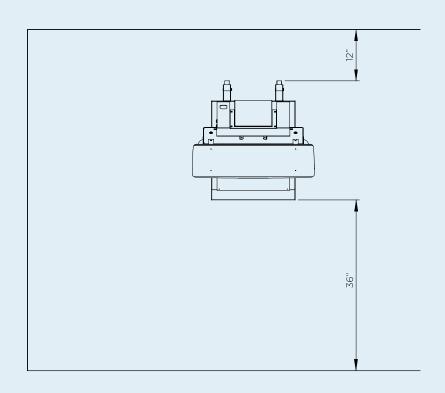

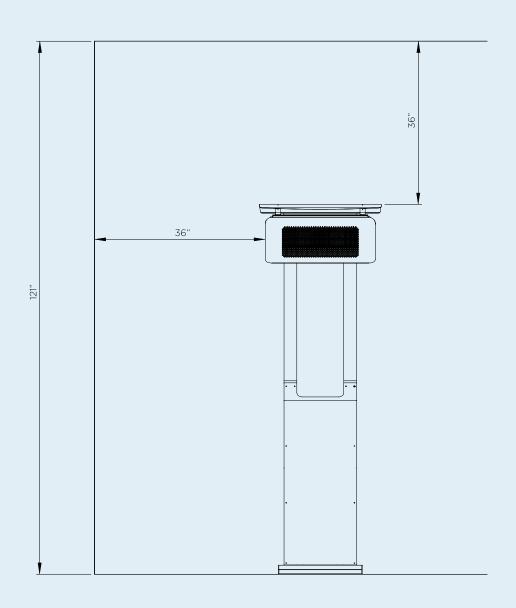



ABOUT BROMIC GROUP

Bromic's reputation for industry and innovation reaches back to 1978. Initially a supplier of gas components, Bromic has since grown to become an international leader that designs, manufactures and distributes a diverse range of quality, engineered products on a global scale.

CONTACT BROMIC

North America

18 Technology Drive | STE 121 Irvine California 92618 USA Tel. 1800 301 1293

Asia Pacific

10 Phiney Place Ingleburn Sydney NSW 2565 AUS Tel. +61 2 9426 5222

Europe

Hoofdstraat 43 | Business Center De Bank 5481 AA Schijndel | The Netherlands Tel. +31 7 3704 1029

BROMIC.COM/**HEATING**