
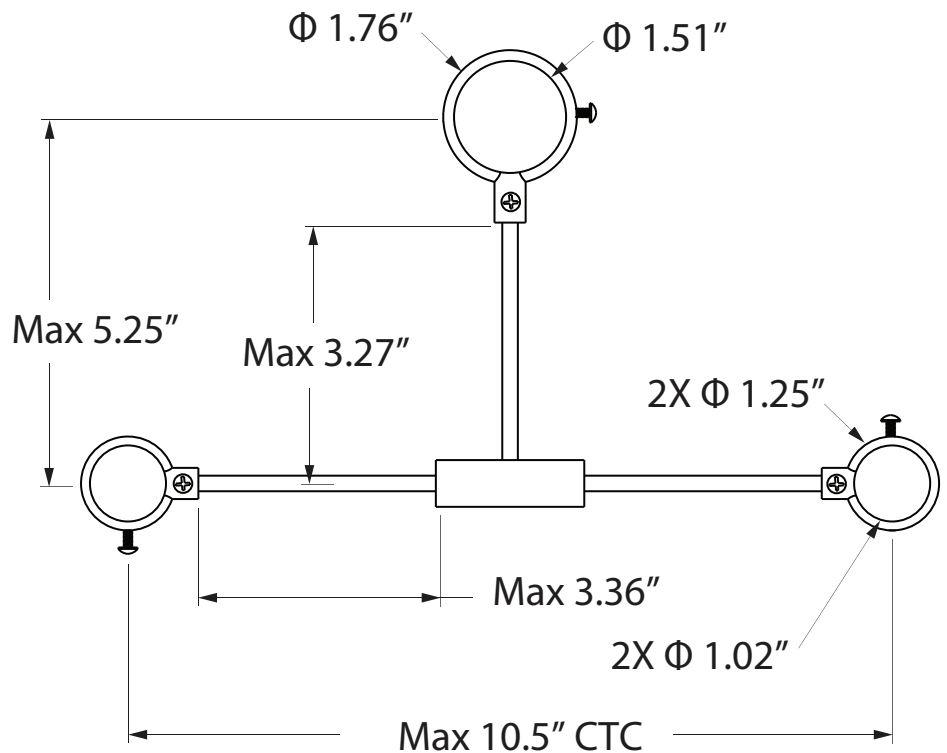


Model # 3362

INSTRUCTIONS

1. Slide loop brackets over supply lines and measure the distance between the two.
2. Assemble T- bracket with two of the rods and the center connector. Cut as needed to the desired length.
3. Attach rods to the supply line loops with set screws. Some adjustments may be needed.
4. Slide loop bracket over waste line and measure the distance to the T-bracket center connector.
5. Thread rod into center connector, Cut as needed to the desired length.
6. Attach rod to the waste line loops with set screw. Some adjustments may be needed.

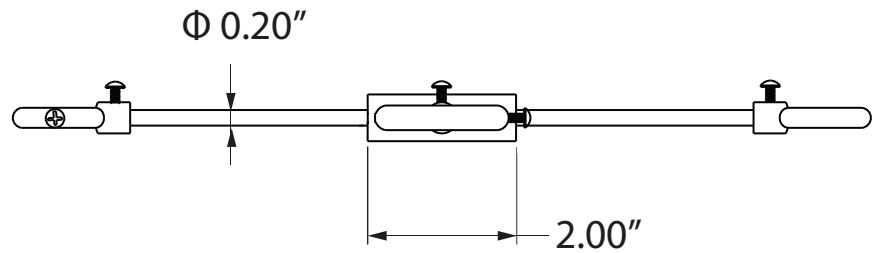

CARE AND MAINTENANCE

Minimum Maintenance is required to maintain product finish. With proper maintenance your CHEVIOT Faucet will continually look like new. Special care should be taken when cleaning your faucet and the following suggestions should help extend your faucet life.

- a) Cleaning should be done regularly using a soft cotton cloth and warm water, then towel dry.
- b) Do not use cleaners that contain abrasives or harsh chemicals; Care should be taken in selecting cleaning supplies. Many cleaners contain detergents, ammonia, or other corrosive solvents that could damage your faucet finish.
- c) occasionally clean with a non-abrasive wax polish.