



24" Upholstered Saddle Seat Bar Stool CF500224

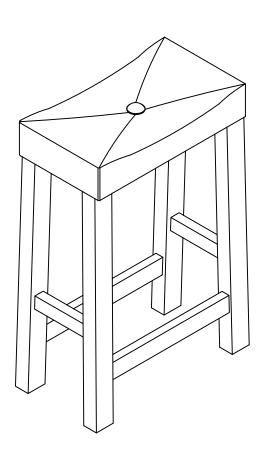

24" UPHOLSTERED SADDLE SEAT BAR STOOL

Assembly Instructions



PART LIST:


Part #	Part Name	Drawing	QTY
1	Seat Cushion		2PCS
2	Leg		4PCS
3	Leg	(1) (1) (1) (1) (1) (1) (1) (1) (1) (1)	4PCS
4	Short Side Stretcher	←	4PCS
5	Long Front / Rear Stretcher	——	4PCS

HARDWARE LIST:


Part #	Part Name	Drawing	QTY	
А	Flat Washer (Φ18*1.5mm)		8PCS	
В	Spring Washer (Φ10*2mm)	0	8PCS	
С	Bolt (Φ1/4"*45mm)		8PCS	
D	Wood Screw (Φ4*37mm)	Diminini	16PCS	
E	Allen Wrench (56*21*4mm)		1PC	
F	Glue		1PC	

Step 1. CHAIR LEGS ASSEMBLY

1A. Add a small amount of glue inside the large holes.




- 1B. Insert Short Side Stretcher (4) with wood dowel aligned on the upper hole on the side of leg.
- 1C. Align another leg (2) to the stretcher.
- 1D. Insert Wood Screws (D) into predrilled holes at both ends of the stretcher.
- 1E. Tighten Wood Screws (D) with Phillips Head screwdriver (not supplied).
- 1F. Repeat same step for the other side of legs.

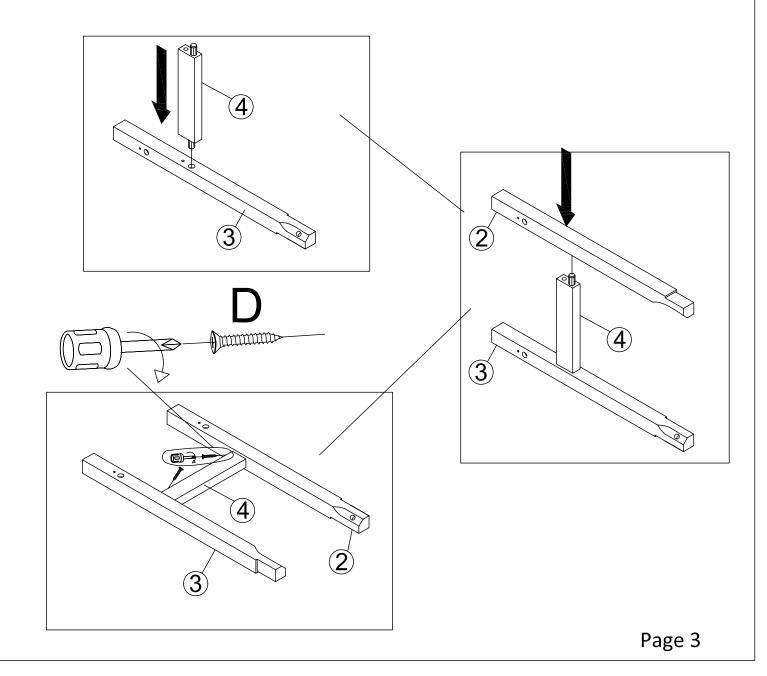


Step 2. FRONT STRETCHER ASSEMBLY

2A. Add a small amount of glue inside the large holes.




- 2B. Insert Long Front/Rear Stretchers (5) with wood dowels aligned with the lower holes into one of the completed sides.
- 2C. Attach remaining side to the other end of the Long Front/Rear Stretchers (5) with wood dowels aligned with the lower holes.

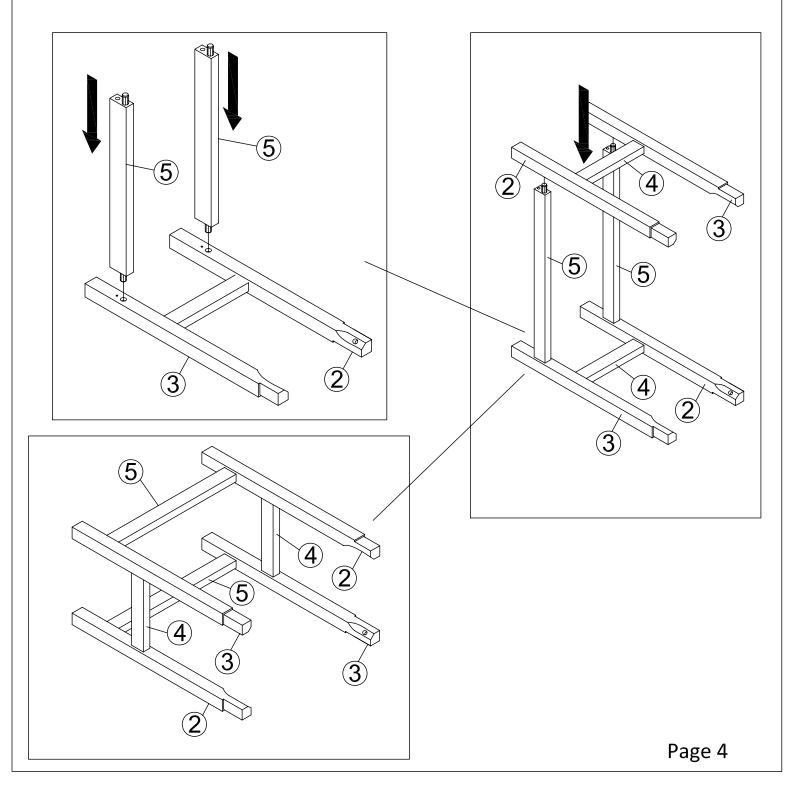

Step 3. CUSHION SEAT ASSEMBLY

- 3A. Place seat cushion (1) upside down on a clean cloth.
- 3B. Slowly insert legs into the bottom frame of seat cushion.
- 3C. Insert Bolt (C) with Spring Washer (B) and Flat Washer (A) through seat frame into legs.
- 3D. Turn bolts clockwise with Allen Wrench (E) until tight.
- 3E. Insert Wood Screws (D) into both ends of Long Front/Rear Stretchers and tighten with Phillips Head screwdriver (not supplied).

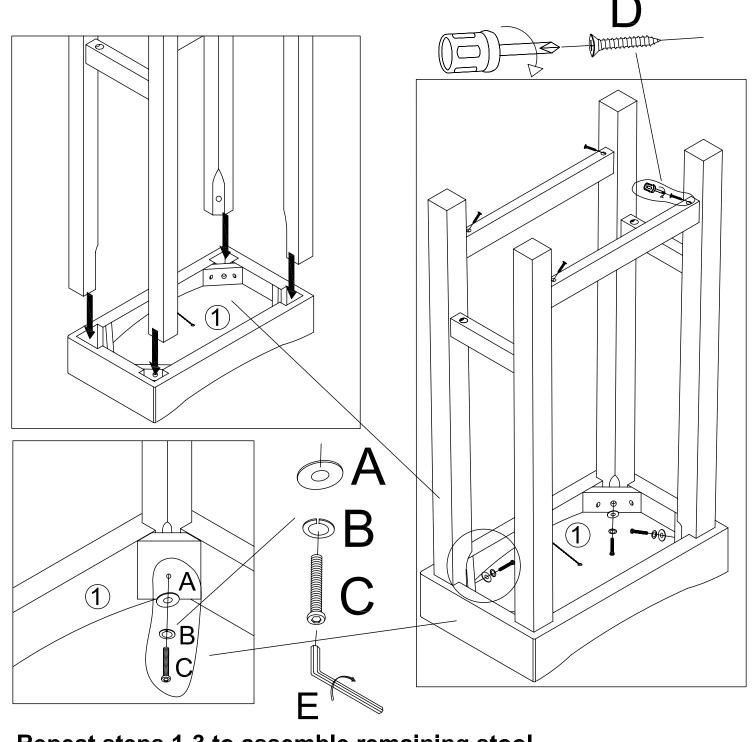

Repeat steps 1-3 to assemble remaining stool.