


Media Stand CF1318



PART LIST

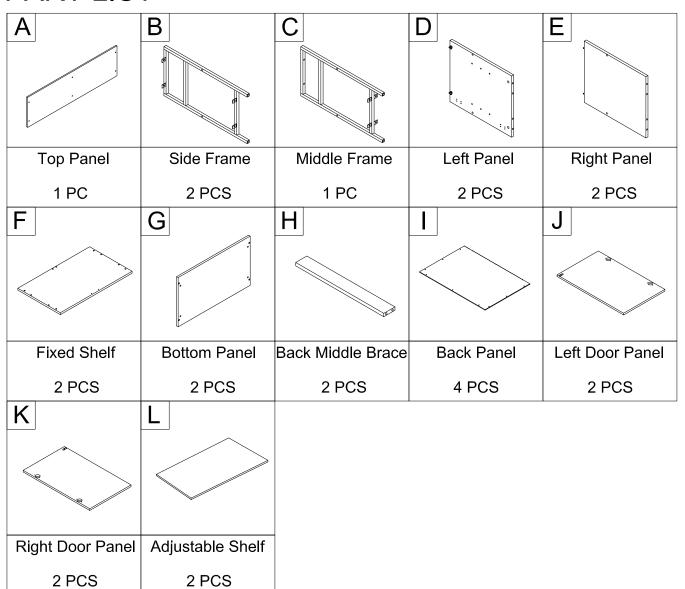

HARDWARE LIST

#1	#2	#3	#4	#5
	Expans		Opposi	
Door Hinge	Flat Head Screw	Double Magnet	Round Head Screw	Shelf Holder
8 PCS	48 PCS (Extra 1)	2 PCS		
#6	#7	#8	#9	#10
Wood Dowel	Barrel Nut	Long Bolt	Medium Bolt	Short Bolt
24 PCS (Extra 1)	8 PCS	8 PCS (Extra 1)	2 PCS (Extra 1)	8 PCS (Extra 1)
#11	#12	#13	#14	#15
Bolt	Flat Washer	Allen Wrench	Screw	Safety Strap Kit
12 PCS (Extra 1)	12 PCS (Extra 1)	1 PC	42 PCS (Extra 1)	1 SET

ADDITIONAL TOOLS (Not Provided)


Note: It is not recommended to use power tools during assembly.



Phillips Head Screwdriver


Note: Wood dowels are intended for alignment. Additional clearance between wood dowel and pre-drilled hole is intentional for ease of assembly.

Please do not use tools to assemble this unit unless specifically indicated.

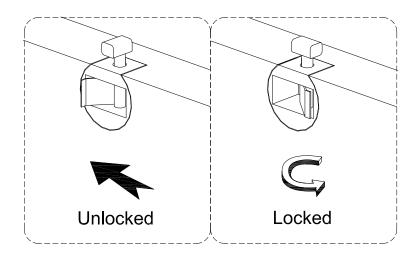


Reference the images above any time the instructions state "lock the hardware". Note: Be sure to check all hardware is locked when completed.


Step 1. Attach double magnets (part #3) to fixed shelves (part F) using round head screws (part #4) and phillips head screwdriver. Attach door hinges (part #1) to door panels (parts J & K) using flat head screws (part #2) and phillips head screwdriver.

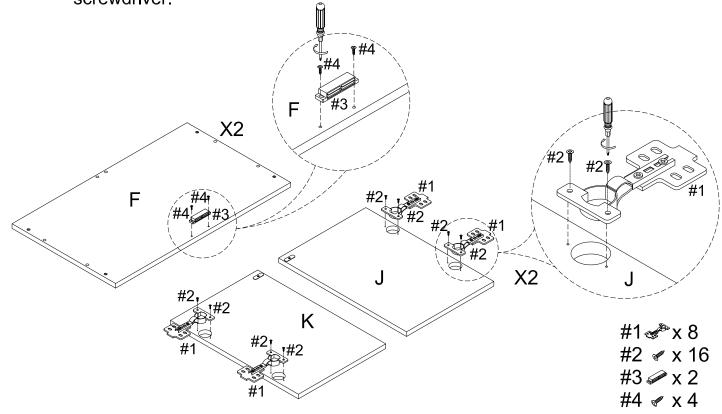


Step 2. Attach left panel (part D) and right panel (part E) to bottom panel (part G) using wood dowels (part #6), barrel nuts (part #7), long bolts (part #8) and allen wrench (part #13).

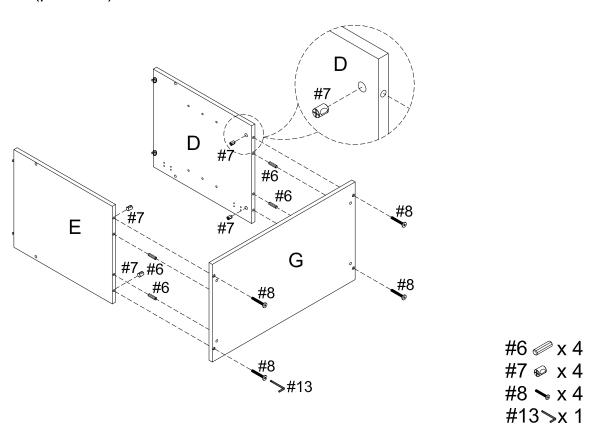


Step 3. Attach back middle brace (part H) and fixed shelf (part F) to assembled unit (parts D, E & G) using wood dowels (part #6) and lock the hardware. Repeat steps 2-3.

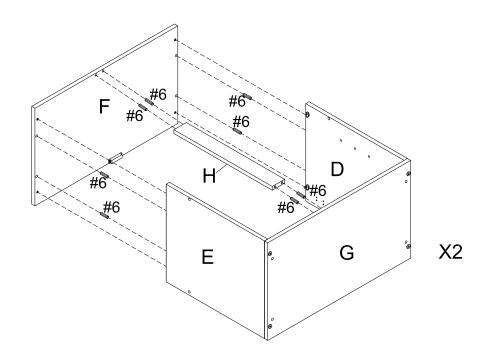

Step 4. Attach side frames (part B) and middle frame (part C) to assembled units (parts D, E & G) using short bolts (part #10), bolts (part #11), flat washers (part #12) and allen wrench (part #13).

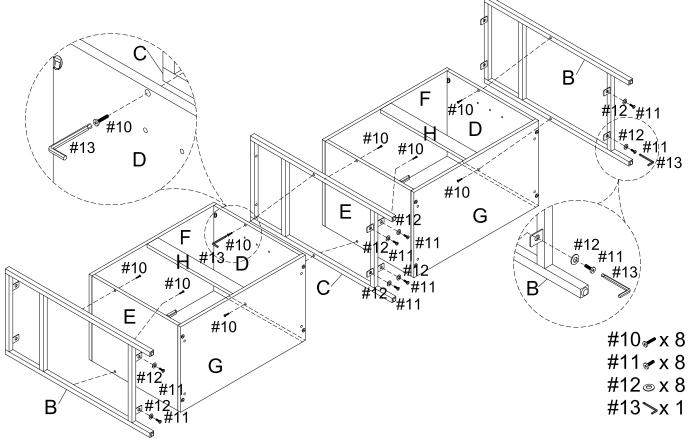


Step 5. Attach back panels (part I) to assembled unit (parts D, E, F, G & H) using screws (part #14) and phillips head screwdriver.

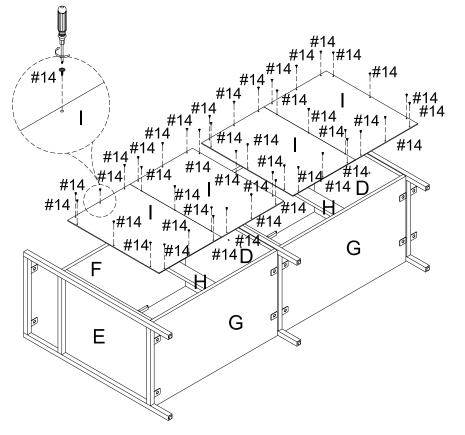


#14 &x 42

Step 6. Attach top panel (part A) to frames (parts B & C) using medium bolts (part #9), bolts (part #11), flat washers (part #12) and allen wrench (part #13).

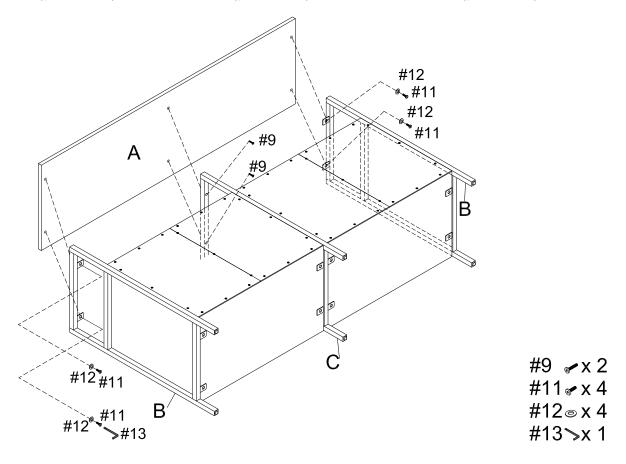


Step 7. Carefully turn unit upright. Place shelf holders (part #5) into desired position and then slide adjustable shelves (part L) into place.

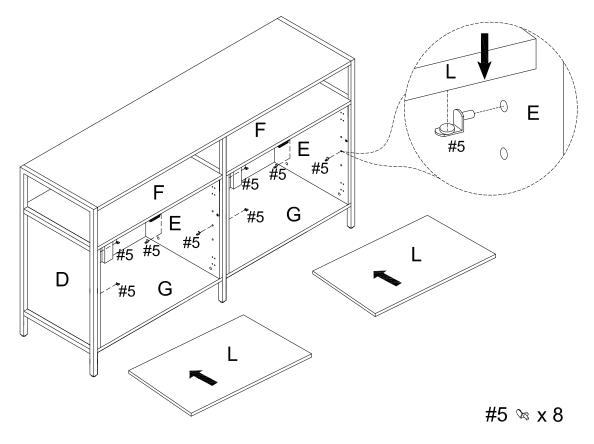

Step 8. Attach door panels (parts J & K) to panels (parts D & E) using flat head screws (part #2) and phillips head screwdriver.

NOTE: It is important to adjust levelers once fully assembled and upright. Extend adjustable leveler until it's firmly in contact with the floor. If relocating, adjust leveler as needed until it's firmly in contact with the floor in new location.

Important: Safety strap kit (part #15) must be installed to prevent tipping, damage and/or injury.

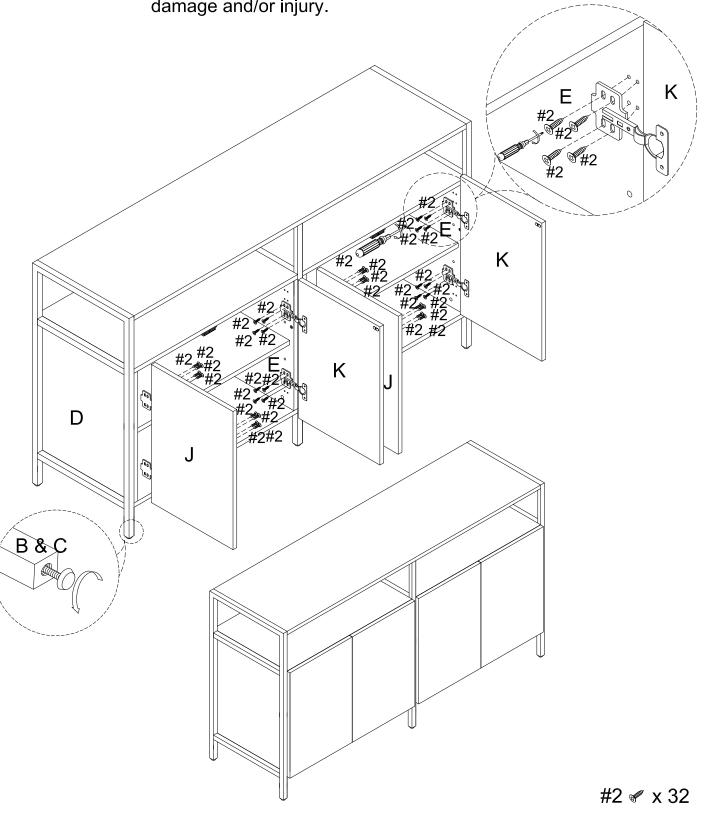


8

#15	Α	В	С	D	E
			D8*3/4"	D8*1-1/2"	
Safety Strap Kit	Wall Anchor	Washer	Short Screw	Long Screw	Safety Wall Strap
1 SET	1 PC	2 PCS	1 PC	1 PC	1 PC

SAFETY WALL STRAP INSTALLATION


Note: It is highly recommended to install this safety strap kit to prevent tipping, damage and/or injury.

- 1.Insert short screw (C) through washer (B) and safety wall strap (E) and attach to top panel (part A) using phillips head screwdriver.
- 2.Drill a 11/32" hole where you want to secure the unit. The drilled hole will be at the same height as the hole in top panel (part A) where the safety wall strap (E) is attached. Tap wall anchor (A) into the hole.
- 3.Insert long screw (D) through washer (B) and safety wall strap (E) into wall anchor (A) using phillips head screwdriver.

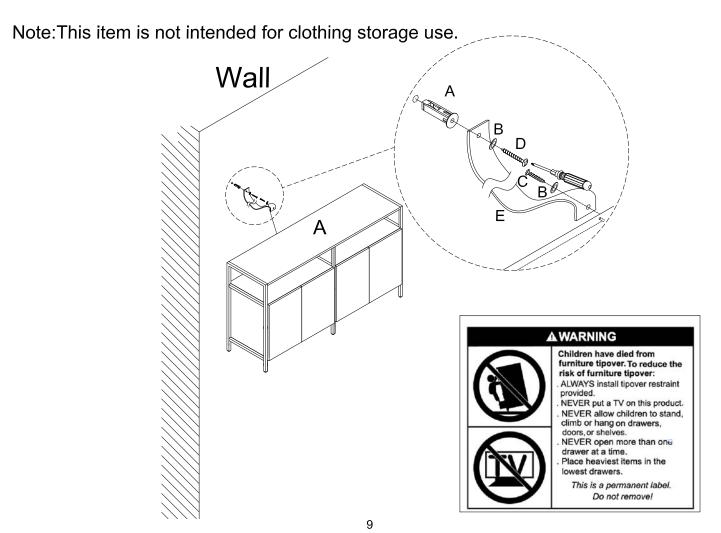


ADJUST YOUR DOORS TO MAKE THE GAPS MORE EVEN (OPTIONAL).

STEP 1 Open the door.




STEP 2 Adjust the gap between door panel and side panel




Loosen the screw indicated a little, adjust the hinge to right position (see step 2a & 2b), then tighten the screw.

STEP 2a MOVE DOOR IN




Push the hinge back a little.

STEP 2b MOVE DOOR OUT




Pull the hinge forward a little.

STEP 3 To adjust the gap between two door




Loosen or tighten the screw indicated a little to adjust the gap between doors panels (see step 3a & step 3b)

STEP 3a MOVE DOOR RIGHT



Turn the screw clockwise a little as shown to make the gap small.

STEP 3b MOVE DOOR LEFT



Turn the screw counterclockwise a little as shown to make the gap big.