



## RETRO METAL GRIFFITH LOVESEAT CO1002A

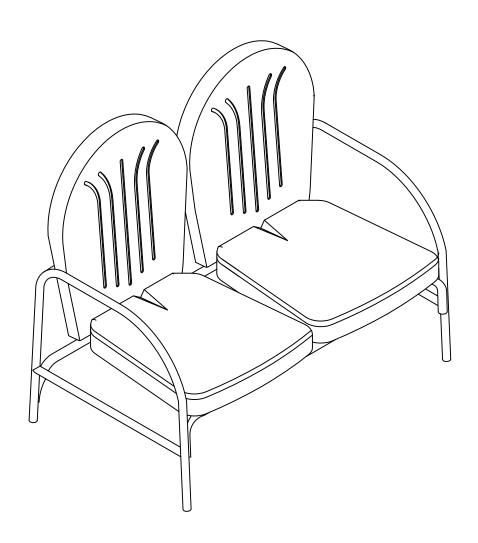

## **PART LIST**

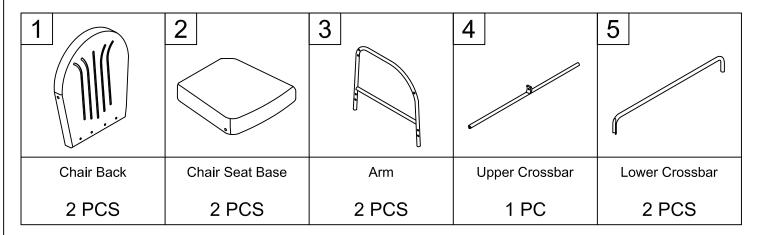


## HARDWARE LIST


A	В	С	D
	<b>6</b>	0	
Short Bolts(M6*13mm) 10 PCS	Nuts 22 PCS	Flat Washers 32 PCS	Wrench 1 PC
E		G	H
Allen Wrench 1 PC	Long Bolts(M6*40mm) 14 PCS	Plastic Washsers 4 PCS	Round Plastic Washer 14 PCS

IMPORTANT NOTE: WE RECOMMEND TWO PEOPLE WORK TOGETHER TO ASSEMBLE THE CHAIR


STEP 1 Attach the Seat (2) and Back (1) using 4 Short Bolts (A), 8 Flat Washers (C) and 4 Nuts (B). Do not tighten until after you have completed the entire assembly process. Repeat for remaining seat and back.

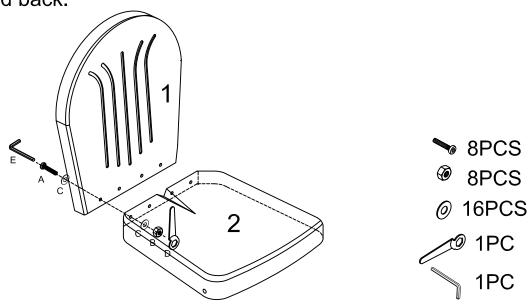

STEP 2 Join the two backs (1) by attaching them to the Upper Crossbar (4) by using 1 Short Bolt (A), 2 Flat Washers (C) and 1 Nut (B). Join the two seats (2) by using 1 Short Bolt (A), 2 Flat Washers (C) and 1 Nuts (B). Do not tighten until after you have completed the entire assembly.

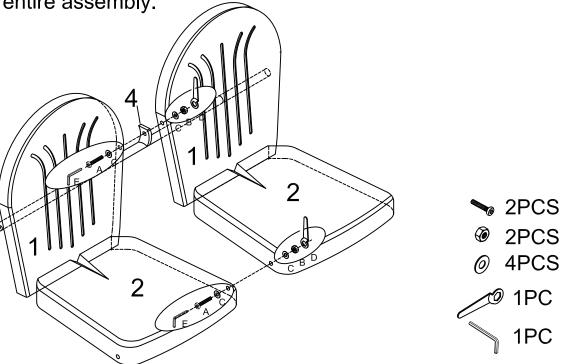

STEP 3 Attach the 2 Arms (3) to the 2 Lower Crossbars (5) using 8 Long Bolts (F), 8 Round Plastic Washer (H) and 8 Flat Washers (C) and 8 Nuts (B). Do not tighten until after you have completed the entire assembly process.

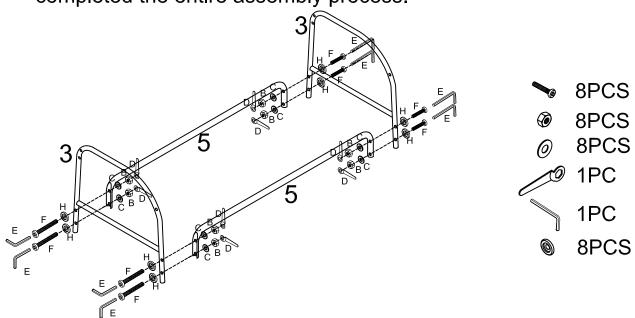

STEP 4 Attach Upper Back Crossbar (4) to Arms (3) using 2 Long Bolts (F), 2 Round Plastic Washer (H). Attach Chair Backs (1) and Seats (2) to Arms (3) using 4 Long Bolts (F), 4 Flat Washers (C) and 4 Round Plastic Washer (H), 4 Plastic Washers (G) and 4 Nuts (B). Do not tighten until after you have completed the entire assembly process.

Once assembly has been completed, tighten all Nuts using the Wrench (D) to hold the Nuts (B) and tighten with the Allen Wrench (E) to firmly secure the loveseat.

