



Outdoor Wicker Chaise Lounge CO7138



PART LIST

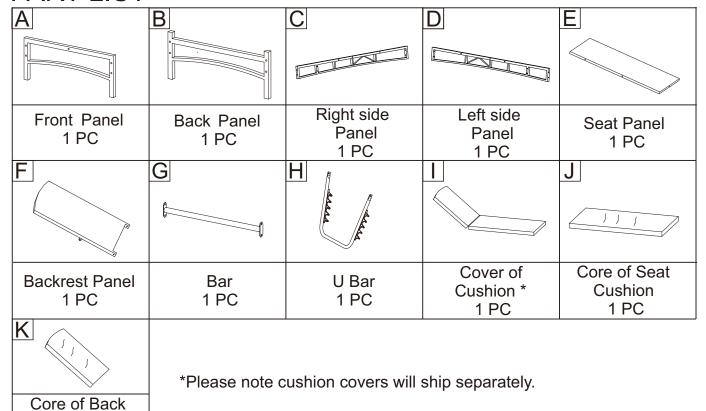

HARDWARE LIST

Cushion 1 PC


| #1 | #2 | #3 | #4 | #5 |
|---------------------|----------------|--------------|-----------------------|-------------------------|
| | | | | |
| M6*20mm | M6*45mm | M6mm | M6mm | |
| Short Bolt 6 PCS | Bolt 15 PCS | Nut 2 PCS | Flat Washer 23 PCS | Plastic Washer 4 PCS |
| #6 | #7 | | | |
| | 2 | | | |
| M6mm | M6mm | | | |
| Allen Key 1 PC | Wrench 1 PC | | | |

EXTRA HARDWARE LIST

| #1 | #2 | #3 | #4 | #5 |
|--------------------|--------------|-------------|----------------|------------------------|
| | | | | |
| M6*20mm | M6*45mm | M6mm | M6mm | |
| Short Bolt 1 PC | Bolt 1 PC | Nut 1 PC | Washer 1 PC | Plastic Washer 1 PC |


Step 1. Lay the right side panel (part C) down on a soft flat surface, such as carpet, as shown below. Attach front panel (part A) to right side panel (part C) using bolts (part #2), washers (part #4) and allen key (part #6).

NOTE:Please do not fully tighten bolts until unit is fully assembled.

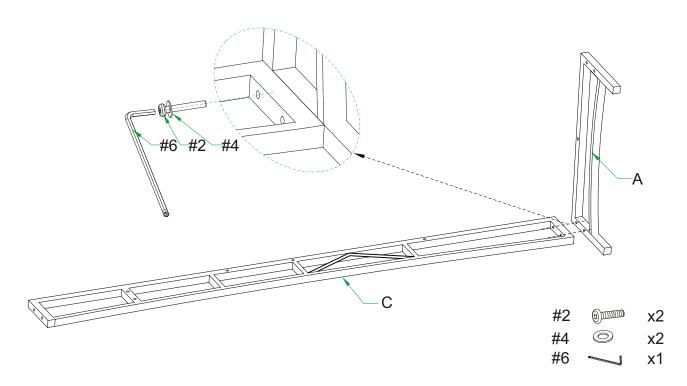


Step 2. Attach seat panel (part E) to right side panel (part C) and front panel (part A) using bolts (part #2), washers (part #4) and allen key (part #6).

NOTE:Please do not fully tighten bolts until unit is fully assembled.

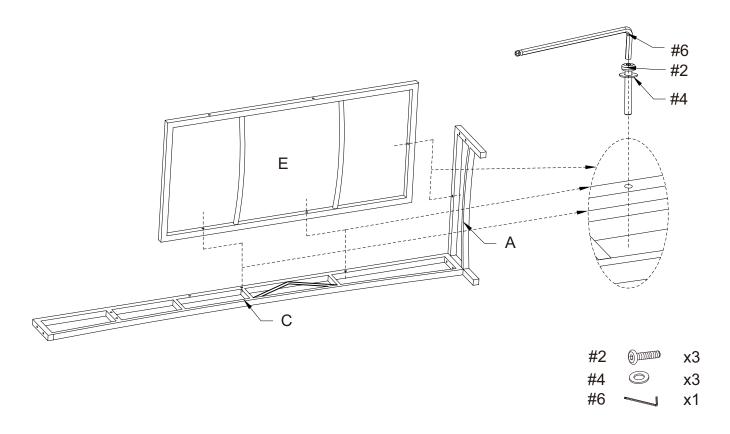


Step 3. Attach back panel (part B) to right side panel (part C) using bolts (part #2), washers (part #4) and allen key (part #6).

NOTE:Please do not fully tighten bolts until unit is fully assembled.

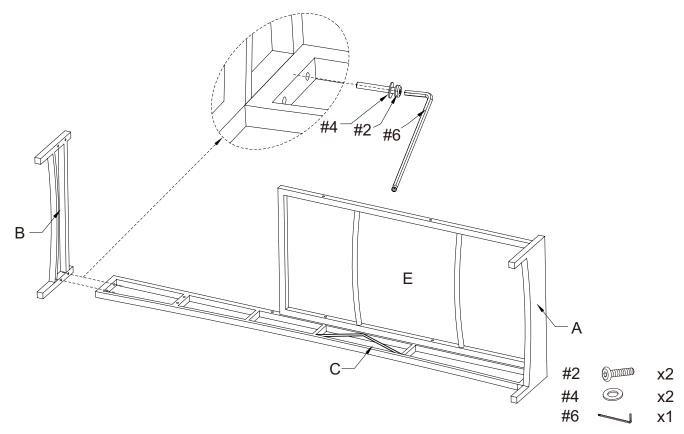


Step 4. Attach left side panel (part D) to front panel (part A), back panel (part B) and seat panel (part E) using bolts (part #2), washers (part #4) and allen key (part #6).

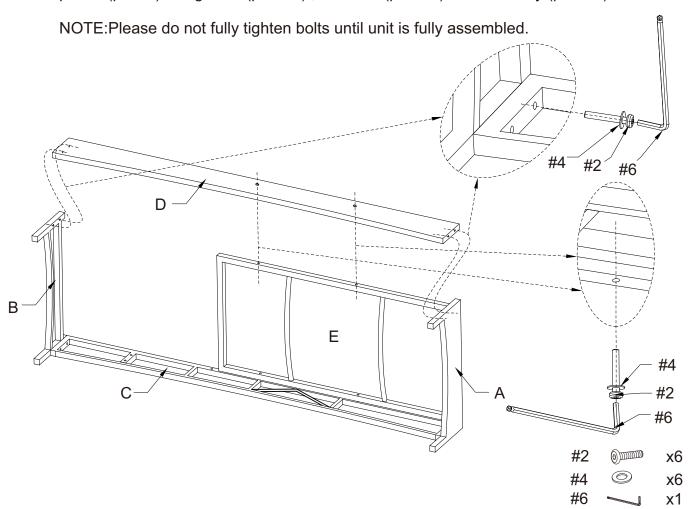


Step 5.Carefully turn assembled unit upright and attach bar (part G) to right side panel (part C) and left side panel(part D) using short bolts (part #1), washers (part #4) and allen key (part #6).

NOTE:Please do not fully tighten bolts until unit is fully assembled.

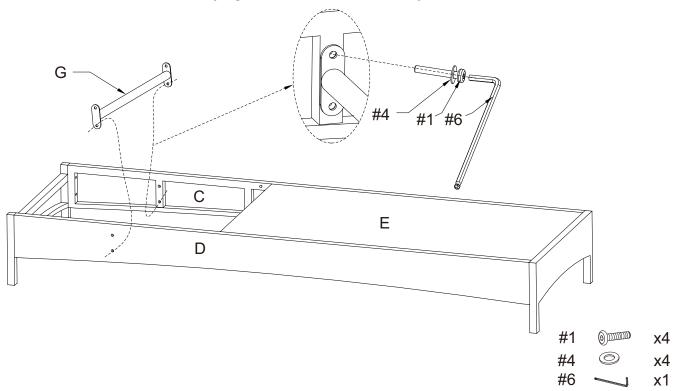


Step 6. Lay the backrest panel (part F) down on a soft flat surface, such as carpet, as shown below. Attach U bar (part H) to backrest panel (part F) using short bolts (part #1), washers (part #4), plastic washers (part #5), nuts (part #3), wrench (part #7) and allen key (part #6).

NOTE:Please do not fully tighten bolts until unit is fully assembled.

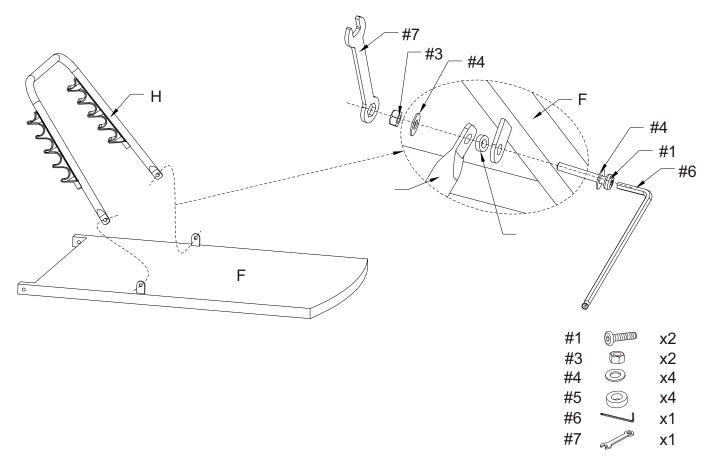


Step 7. Attach the assembled unit (parts F&H) to right side panel (part C) and left side panel(part D) using bolts (part #2),washers (part #4) plastic washers (part #5)and allen key (part #6).


NOTE: Please fully tighten all bolts at this time.

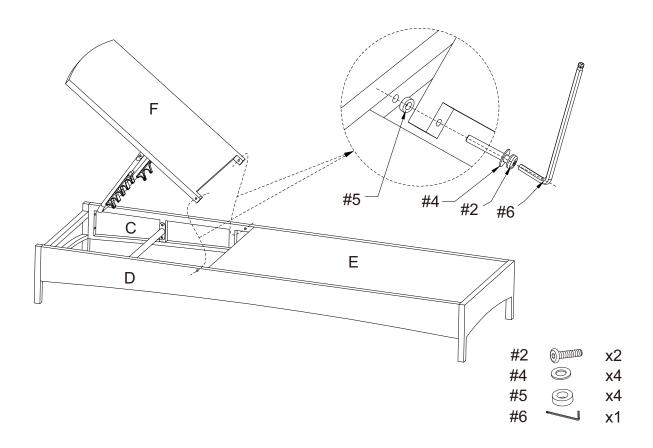

Step 8. Insert core of seat cushion (part J) into cover of cushion (part I). Insert core of back cushion (part K) into cover of cushion (part I).

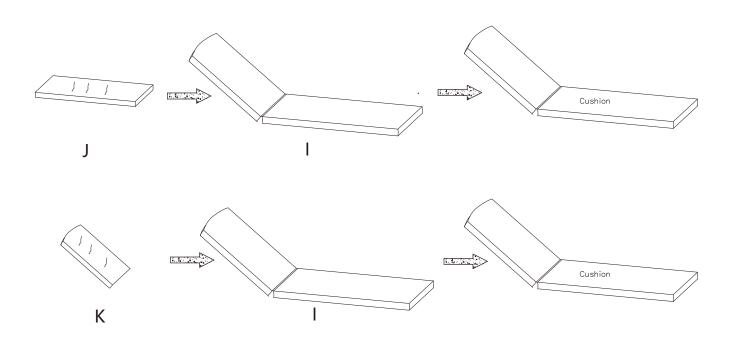

Step 9.Place the cushion (part I) on top of the lounge chair.

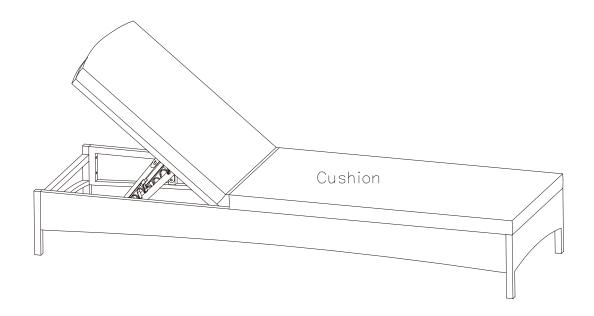

Warning:Please make sure U bar (part H) is fully engaged with bar (part G) before use.

