




DAX-8105



BATHTUB FILLERS **SERIES**

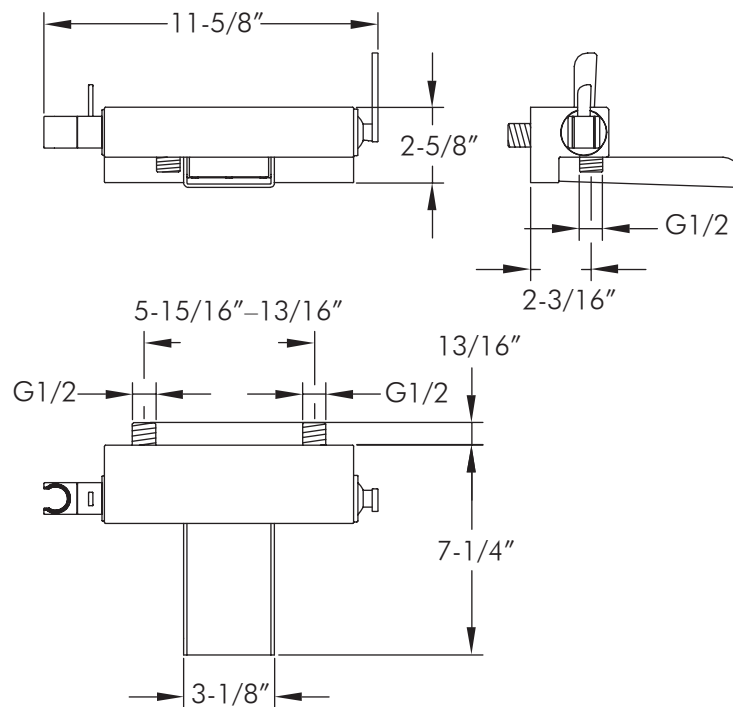

FEATURES

- Wall mount
- Brass body
- Chrome finish
- Anti-scalding protection
- Ceramic cartridge
- Flow rate 3.3 GPM
- Hand shower included
- Mounting parts and water lines included






BATHTUB FILLER **DAX-8105**


MODEL	DAX-8105
ADA	NO
UPC APPROVED	NO
ANSI APPROVED	NO
ASME APPROVED	NO
WATERSENSE CERTIFIED	NO
NSF APPROVED	NO
CONNECTION SIZE	1/2"
FAUCETS HOLE	1
FLOW RATE (GPM)	3.3 GPM
HANDLE STYLE	Single
NUMBER OF HANDLES	1
HEIGHT	7-1/4"
HOSE LENGTH	59-1/16"
INSTALLATION TYPE	Wall-mounted
MATERIAL	Brass
FINISH	Chrome
SIDESPRAY	NO
CARTRIDGE TYPE	Ceramic
POP-IP INCLUDED	NO
POP-IP INCLUDED	NO

01

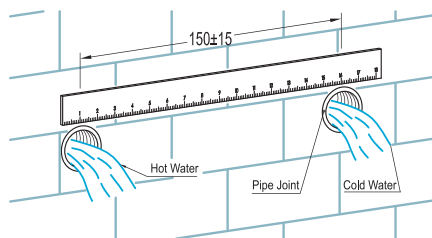


Install the cold and hot water pipes in the wall at the height of 600mm. The distance between is 150mm with the hot water on the left and the cold water on the right

02

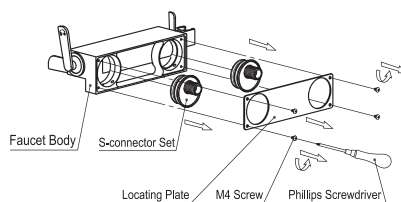


Remove the four M4 screws off the faucet body with Phillips screwdriver and take out the locating plate and S-connectors set

03

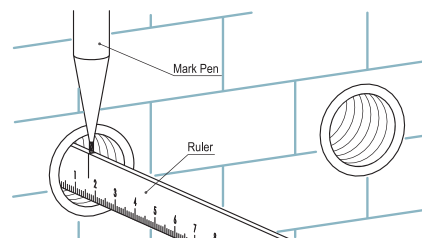


Measure the depth of thread joint with ruler and make marks on the wall with marked pen based on the wall

04

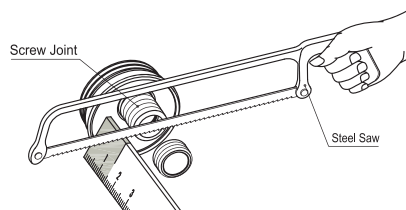


Measure the length of screw joint on the S-connector with ruler. If the length is longer than that of the pipe joint, cut it by a steel saw

05




06

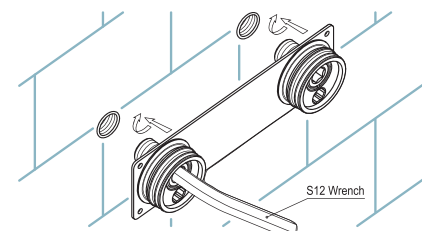


Wrap the two S-connectors with Teflon tape and put them through the locating plate and screw them into the pipe joint. Tighten them with S12 wrench (Fig.5 and Fig.6)


07

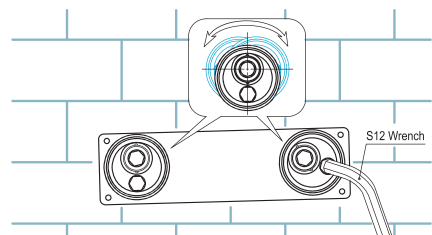

08

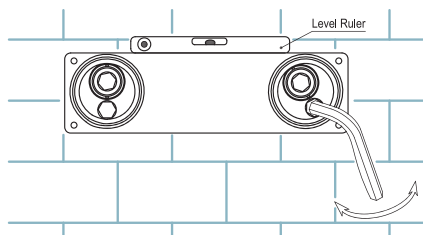


09

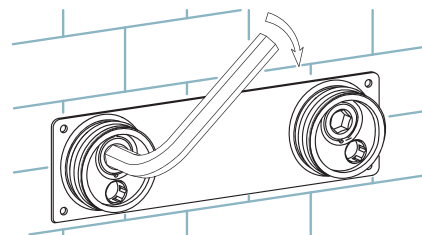

Adjust the S-connector sets parallel with the locating plate with S12 wrench. Check it by level ruler and screw up the screw joints (Fig.7, Fig.8 and Fig.9).




10




Put on the faucet body to the S-connectors against the wall, tightened them with 4 M4 screws. Connect the handshower and the faucet body with the flexible hose. the installation is finished.

11

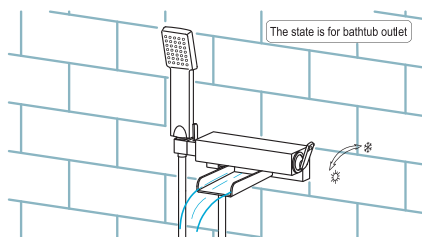


12

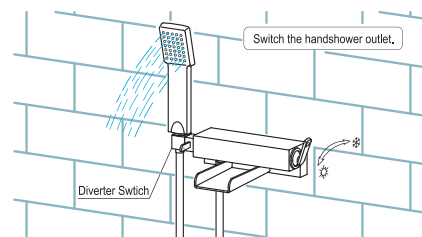

Turn on water for inspection (Fig.11, Fig.12)

13

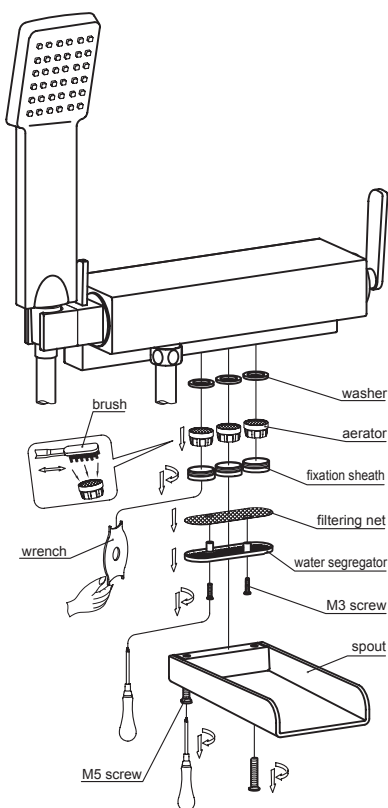

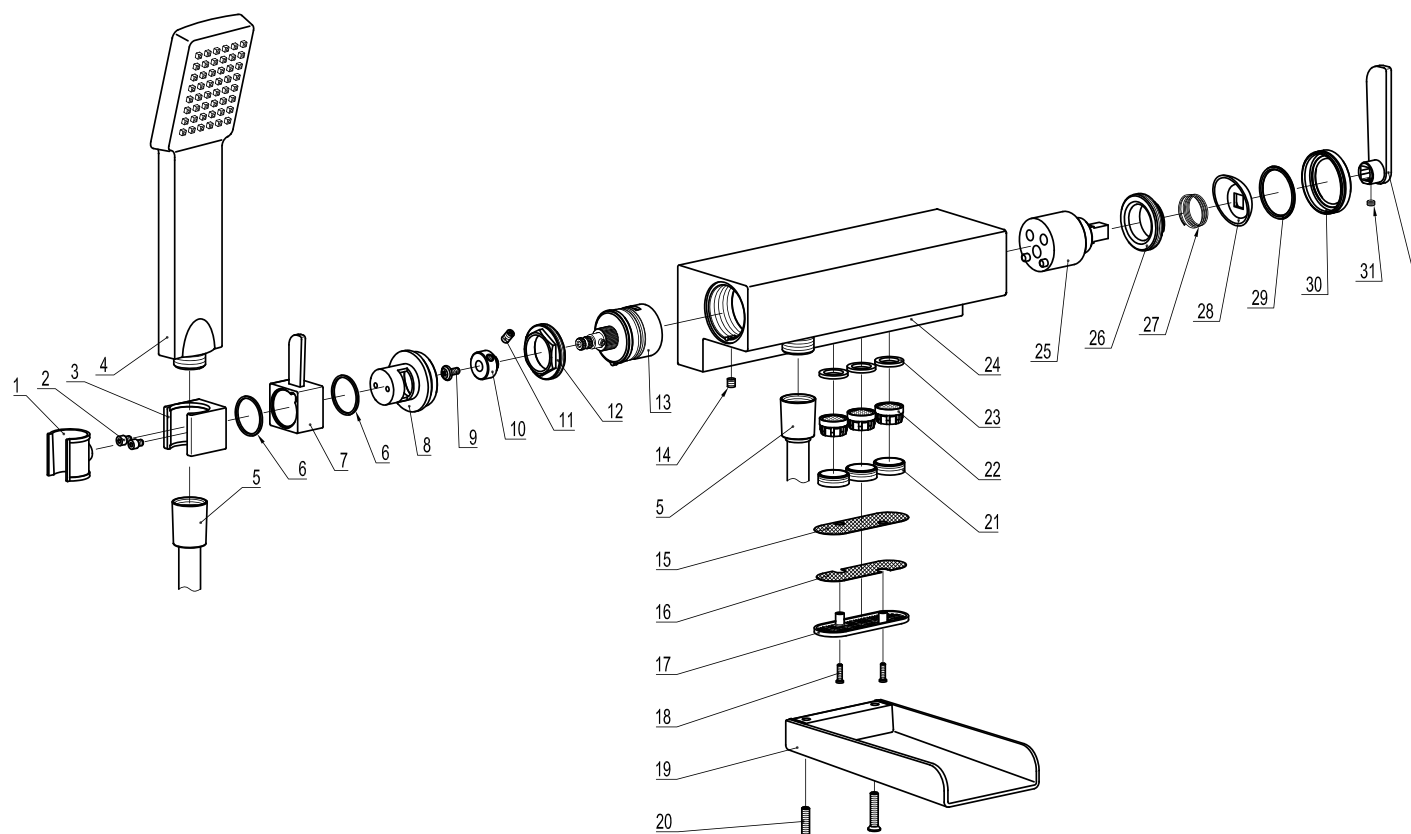




DIAGRAM NUMBER	DAX SKU	TITLE DESCRIPTION
1	FH T-64	Protection sleeve
2	FH TL-10405	M4X5 Internal hex socket head cap screw
3	FH 8105-11A	Connect core
4	FH 550	Handshower
5	FH 8861B	PVC hose
6	FH 8105-09	Plastic isolated ring
7	FH 8105-08	Handle
8	FH 8105-07	Handle core
9	FH T-02A	M4X6 stop screw
10	FH 8105-10	Handle core
11	FH 8105-12	M5X6 screw
12	FH 8458-02	Locknut
13	FH TE03A	E03A diverter valve
14	FH TJ-30505	M5x5 Internal Hex flat end locking screw
15	FH 8105-05	Filter
16	FH 8105-13	Filter
17	FH 8105-06	Water segregator
18	FH 8105-14	Handle
19		Spout
20	FH TL-70525	M5X25 Cross recessed screw
21	FH 8623-04	Spout inner collar
22	FH TQ-06A	M22 aerator
23	FH 8223-11	Spout washer
24		Faucet body
25		Ø 35 cartridge
26	FH DB-07	Locknut
27	FH D25-05	Sping
28	FH D25-04A	Decorative ring
29	FH D25-03	Plastic ring
30	FH D66-02	Locknut
31	FH TJ-30503	M5x3 Internal Hex flat end locking screw
32	FH D67-01	Handle

For parts or sale requirements
please contact our customer service department:



CS@daxib.com



1 888 685 8236