

## **FEATURES**

- Single Lever
- Ceramic cartridge
- Brass body
- Flow rate 1.2 GPM
- Installation hole 1-3/8"
- Chrome finish
- Hoses and mounting parts includedPop up drain not included (available)






BATHROOM FAUCET <b>DAX-9829</b>		
MODEL	DAX-9829	
ADA	No	
UPC APPROVED	No	
ANSI APPROVED	No	
ASME APPROVED	No	
WATERSENSE CERTIFIED	No	
NSF APPROVED	No	
<b>CONNECTION SIZE</b>	G3/8	
FAUCET HOLE SIZE	1-5/16"	
FAUCETS HOLE	Single hole	
FAUCET TYPE	Basin mixer	
FLOW RATE (GPM)	1.2 Gpm at 60 psi	
HANDLE STYLE	Single lever	
NUMBER OF HANDLES	1	
HEIGHT	5-13/16"	
INSTALLATION TYPE	Deck mounted	
MATERIAL	Brass body + zinc handle	
FINISH	Chrome	
SPOUT HEIGHT	3-3/4"	
SPOUT REACH	3-15/16"	
SPOUT SWIVEL	No	
SPOUT TYPE	Casting spout	
CARTRIDGE TYPE	Ceramic mixer	
POP-IP INCLUDED	No	
MAX DECK THICKNESS	1-3/4" Max	





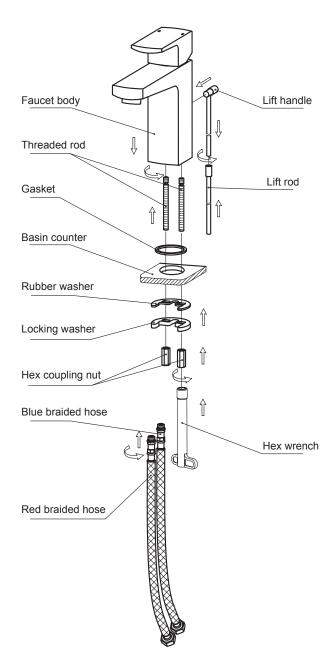


## **INSTALLATION STEPS**

- As shown in figure, connect braided hoses and threaded rod to faucet body tightly (Note: position as red braided hose on the left and blue braided hose on the right), slide lift handle into the slot at the back of faucet body and connect with lift rod.
- 2. Pass faucet body with gasket through hole of basin counter, pad rubber washer and locking washer in turn, tighten with hex coupling nut.
- 3. Install drainage set and connect with lift rod.
- 4. Connect braided hoses with triangle valves. Note: position as hot left and cold right.
- 5. Run water to check if the installation is qualified.



DIAGRAM NUMBER	DAX SKU	TITLE DESCRIPTION
1	FH D38A-02	Decoration cap
2	MF 0615	Ø3x1-1/2"O" ring
3	FH TJ-30504	Internal Hex flat end locking screw
4	FH D63-01A	Handle
5	FH DB-18	Decorative ring
6	FH DB-17B	Locknut
7	FH SEDAL-25	Ø1" cartridge
8	MF 2722	Ø23x2.2 "O" ring
9	FH 9829-02A	Cartridge base
10	FH 8466-05	M5 screw
11		Faucets body
12	FH 8223-11	Spout washer
13	FH TQ-06B	M22 aerator
14	FH 8623-04	Spout inner collar

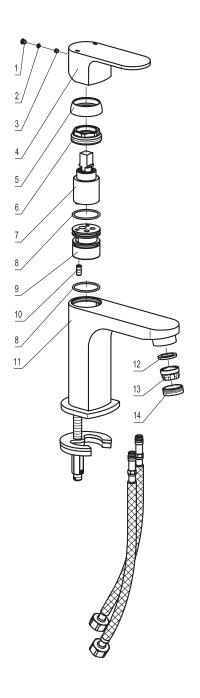

For parts or sale requirements please contact our customer service department:





1 888 685 8236