


## Specific Features:



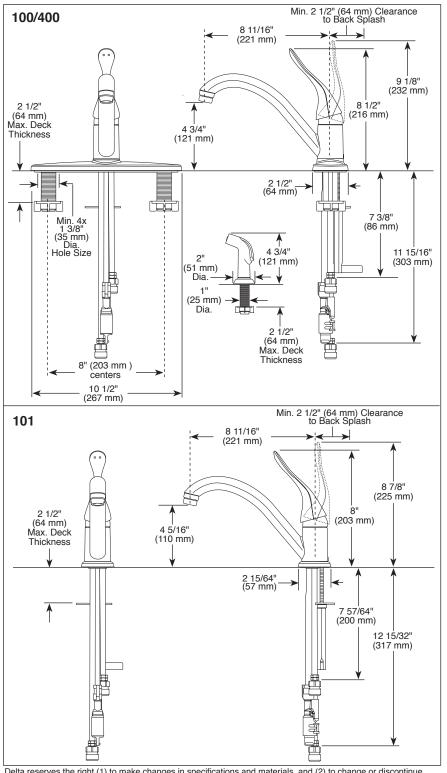

- Single Handle
- Single, 3 and 4 Hole Sink Applications

## **STANDARD SPECIFICATIONS:**

- Single handle kitchen deck faucets for exposed mounting on single, three or four hole sinks.
- All metal fabricated body
- Spout rotates 180°
- 1.5 gpm (5.7 L/min.) vandal resistant aerator
- Vandal resistant lever handle
- Lever handle shall return to neutral position when faucet is turned off
- Red and blue on handle to indicate hot/cold temperature
- Control mechanism shall be the diamond coated ceramic cartridge
- Adjustable handle limit stop
- 3/8" O.D. straight, staggered copper supply tubes with 3/8" fittings
- Model 400 series with 45" (1143 mm) hose and spray attachemnt has anti-siphon device as integral part of faucet.
- Mounts on standard 1 3/8 (35 mm) diameter holes on 8" (203 mm) centers.
- Designed for routine 180° F (82° C) disinfection cycles up to 30 mins

## WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

## **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1
- Verified compliant with .25% weighted average Pb content regulations.

▲ Designate proper finish suffix

Delta Faucet Company 55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2020 Delta Faucet Company