



Submitted Model No.:

Specific Features:



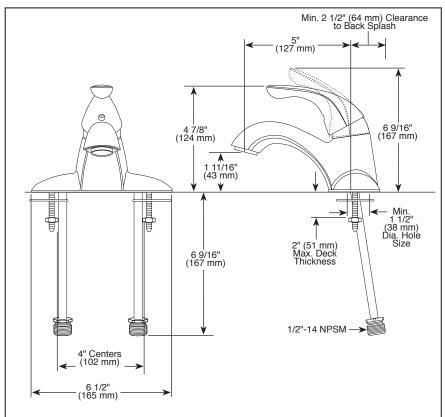

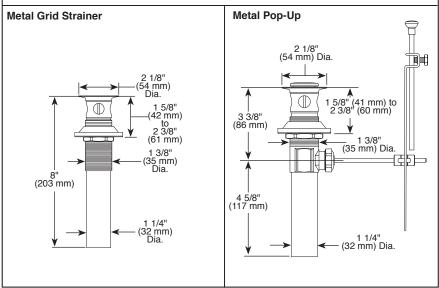

BATHROOM FAUCET

Single Handle

STANDARD SPECIFICATIONS:

- Max. flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- HGM (models only) maximum 0.50 gpm @ 60 psi, 1.9 L/min @ 414 kPa
- TGM (models only) maximum 0.35 gpm @ 60 psi, 1.3 L/min @ 414 kPa
- Two and three hole mount
- Solid brass fabricated body
- Vandal resistant lever handle. Red/blue colored graphics indicate hot/cold temperature.
- Diamond coated ceramic cartridge
- Adjustable handle limit stop
- 3/8" O.D. copper supply tubes with 1/2"-14 NPSM adapters
- Models have 1/4" threaded mounting studs
- Available options for field conversion: 6" (152 mm) long elbow handle-red/blue colored graphics indicate hot/cold temperature. Order RP54687.
- Vandal resistant aerator or spray outlet
- Metal grid strainer (523)
- Metal pop-up drain (520)
- Lift rod hole (520)

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
 ASME A112.18.2 / CSA B125.2
 Indicates compliance to ICC/ANSI A117.1 Valve control only
 EPA WaterSense® Applies to 501LF-HDF, 520LF-HDF, 523LF-HDF
- Verified compliant with .25% weighted average Pb content regulations.

Delta Faucet Company 55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON NSP 4L1 © 2020 Delta Faucet Company