




Submitted Model No.:


# **Specific Features:**

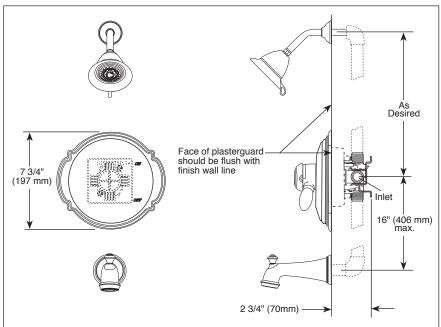






▲ Designate Proper Finish Suffix









see what Delta can do

# TUB AND SHOWER FAUCET TRIM

- Victorian<sup>®</sup> Bath Collection
- TempAssure<sup>®</sup> Thermostatic
- Valve Only (T17T055 Series)
- Shower Only (T17T255 Series)
- Tub/Shower (T17T455 Series)

### **FEATURES:**

■ TempAssure® 17T thermostatic valve cartridge

#### **STANDARD SPECIFICATIONS:**

- Thermostatic wax element maintains the outlet temperature to ±3.6°F
- Must also order Multi-Choice<sup>®</sup> Universal rough separately
- Back-to-back installation capability
- Lever volume control handle; temperature adjustment dial
- Graphics indicate hot/cold temperature adjustment
- Field adjustable to limit rotation into hot water zone
- All parts are replaceable from the front of the valve
- Adjusts for up to 1" wall thickness
- Maximum 2.5 gpm @ 80 psi, 9.5 L/min @ 550 kPa
- Tub port maximum flow rate 8.6 gpm @ 60 psi with R10000-UNBX
- Shower arm overall horizontal length = 7" (178 mm), including threaded ends
- Available extension kit (RP75136) adds up to 1 3/8" installation depth

## **WARRANTY**

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

# **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- ASSE 1016

Indicates compliance to ICC/ANSI A117.1

**Delta Faucet Company** 

55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2018 Delta Faucet Company