

Electronic Flush Valves & Retrofit Kits

Rough-in for 1600T6403TR Hardwire operated concealed flush valve-for Syphon Jet Urinal with .75" Back Inlet spud and 14" x 14" front access cover

Model No: 1600T6403ARI

COMPLIES WITH:

• IAPMO listed to ASSE 1037/ASME A112.1037/CSA B125.37.

- ADA compliant to meet Handicapped Accessibility Standard ICC/ ANSI A117.1 of less than 5 lbs operating force.
- (Contact Delta Representative for State and/or Local Approvals)





SPECIFICATION:

- Roughin Only (Trim must be purchased separately)
- Electronic solenoid activated Teck® concealed diaphragm flush valve
- Adjustable 114mm (4.5") to 132mm (5.19") inlet/valve outlet centers
- Vacuum breaker
- Renewable seat
- Chloramine resistant diaphragm attached to guide with metal retainer
- Pressure loss check angle stop with wheel handle
- HARD WIRE operated
- For SIPHON JET URINAL with 3/4" BACK inlet
- With metal mounting plate for 14" x 14" Front Access Wallplate
- External water conserving flush adjustment: Factory Set to 1.9 Litre (0.5 GAL.) FIELD ADJUSTABLE from 0.47 to 3.78 Litre (1/8 to 1.0 GAL.)


OPERATION:

- 8 second blocking time
- 0 second activation delay
- Selectable sensing distance:12" to 28" in 4" increments. Factory set to 20"
- Recommended water supply:
 Minimum flowing pressure 25 psi (172 kPa)
 Minimum flow rate 8 gpm (30 L/min)
- Adjustable flush volume using adjustment screw on flush valve

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced December 20, 2016.



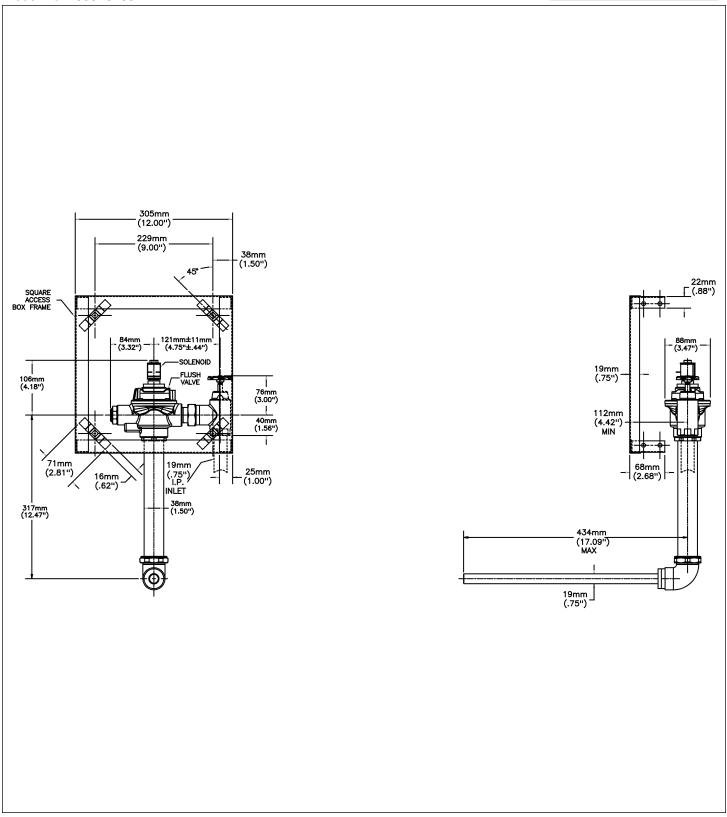

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced December 20, 2016.