

Lavatory Faucets

102mm (4")Centerset with ADA Offset Grid Strainer (No Pop-up hole)

Model No: 22C551

COMPLIES WITH:

- CSA certified
- Verified compliant with 0.25% weighted average Pb content regulations
- Complies to ASME A112.18.1/CSA B125.1
- Complies to ASME A112.18.6 for Flex Connector Models
- & Indicates compliance to ICC/ANSI A117.1
- (Contact Delta Representative for State and/or Local Approvals)



SPECIFICATION:


- CAST BRASS
- Ceramic cartridge with rotational limit stop
- Metal hold-down package
- 102mm (4")Centerset with ADA Offset Grid Strainer (No Pop-up hole)
- Chrome Finish
- Outlet#: 5 Vandal Resistant 0.5gpm (1.9 L/min) Non-Aerating Spray Outlet
- Handle#: 1 Vandal Resistant 89mm(3 1/2") lever handle ADA compliantcolour indexed

OPERATION:


Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced April 13, 2021.





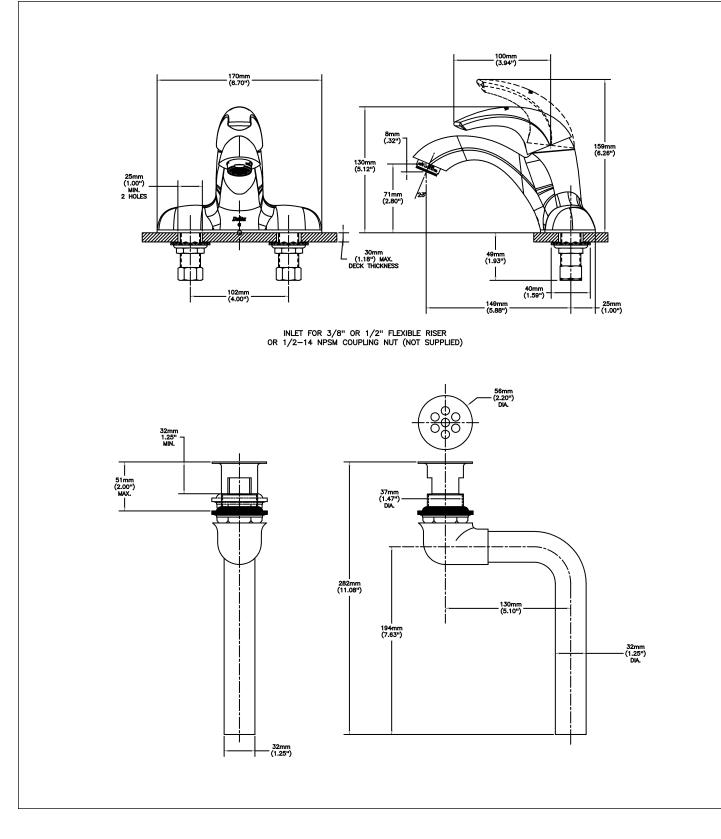

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced April 13, 2021.