





Dornbracht Assembly Instructions


For use with shower heads rated at 1.4 gpm / 5.3 l/min or higher.

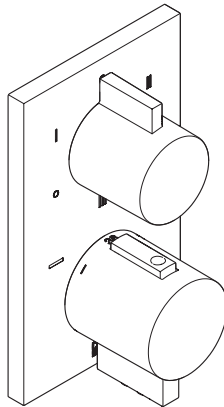


36 428 670-FF 0010 / 36 428 710-FF 0010 / 36 428 845-FF 0010 /
36 428 970-FF 0010 / 36 428 977-FF 0010




36 428 670-FF 0010




36 428 710-FF 0010



36 428 845-FF 0010



36 428 970-FF 0010



36 428 977-FF 0010

General warnings



Caution!

This icon warns of property damage due to non-compliance with the safety instructions.



Note!

This icon warns of possible property damage due to non-compliance with the installation instructions.

All work must be carried out exclusively by trained, qualified personnel! Only then can the manufacturer assume liability. National accident prevention regulations have priority in all cases. Operating conditions and dimensions can be found in the appendix.




Care and Maintenance



Technical data







dornbracht.com
> Professional



2 / 2,5 / 6 / 10 mm




22 / 24 mm




Parts supplied

36 428 670-FF 0010 / 36 428 710-FF 0010 / 36 428 845-FF 0010 / 36 428 970-FF 0010 /
36 428 977-FF 0010

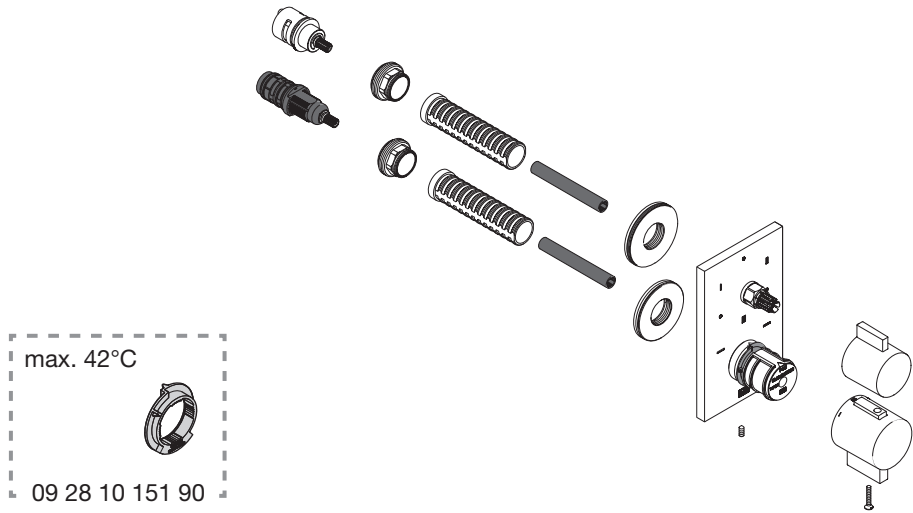

Required miscellaneous article

35 428 970-90 0010

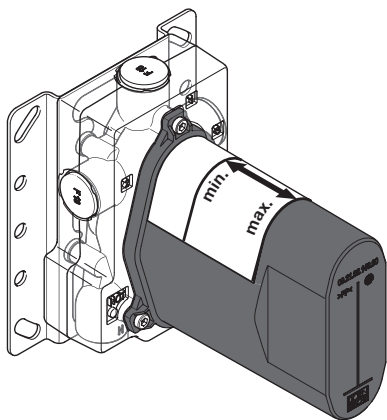


TOP







3 Wege
3 function
3 Vias
3 Vias
3 Vias
3 Weg







35 428 970-90 00 10







01 28 16 970 00






Handbuch
Montageanleitung








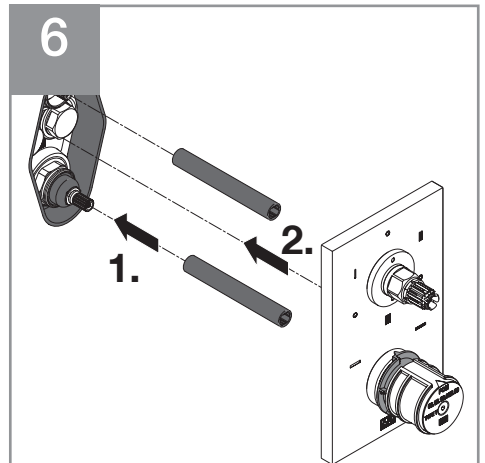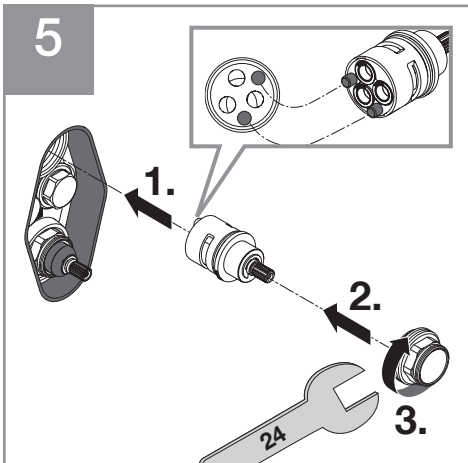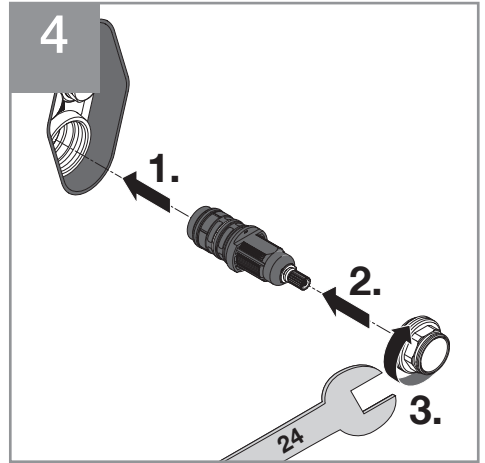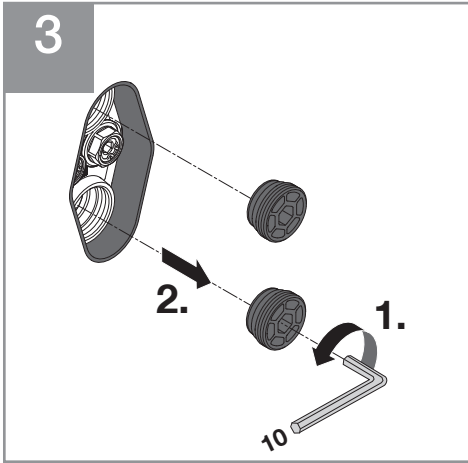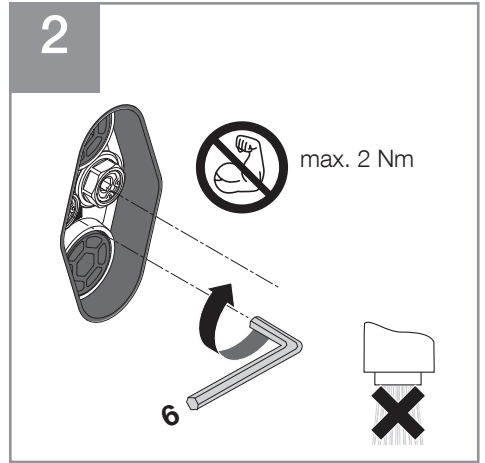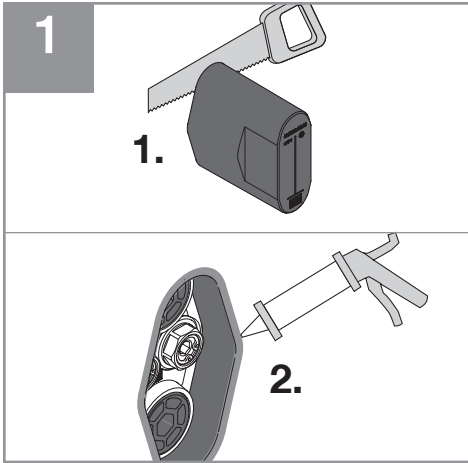

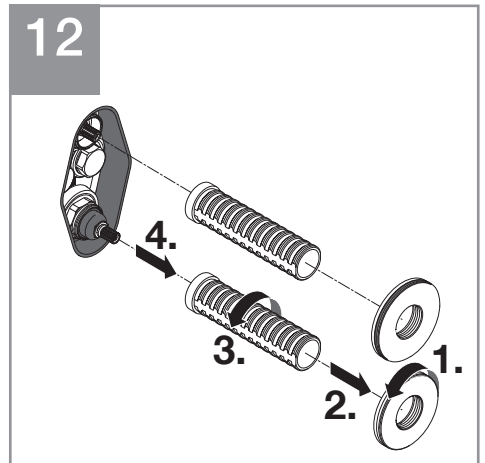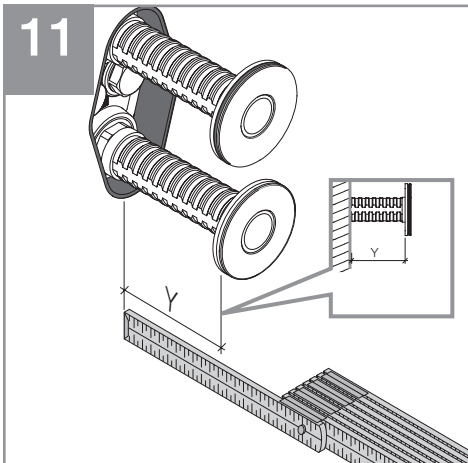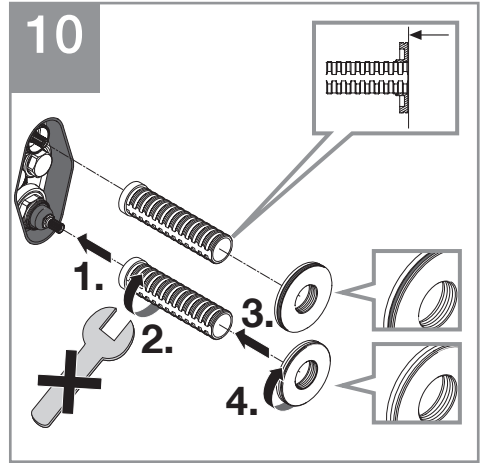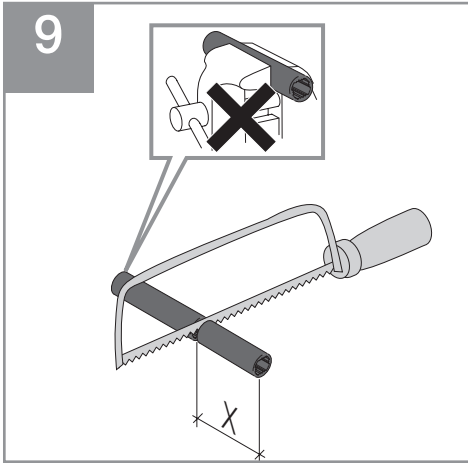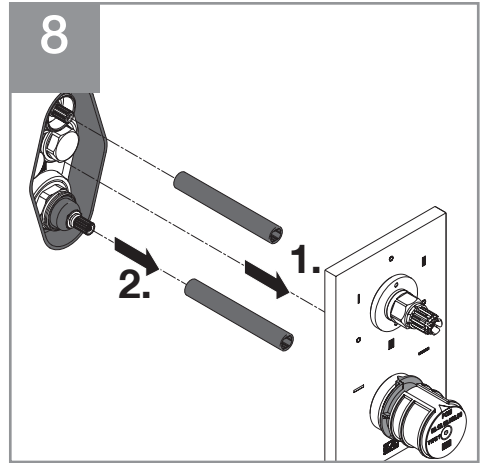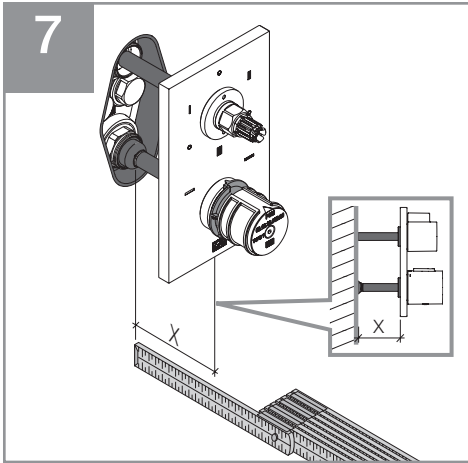


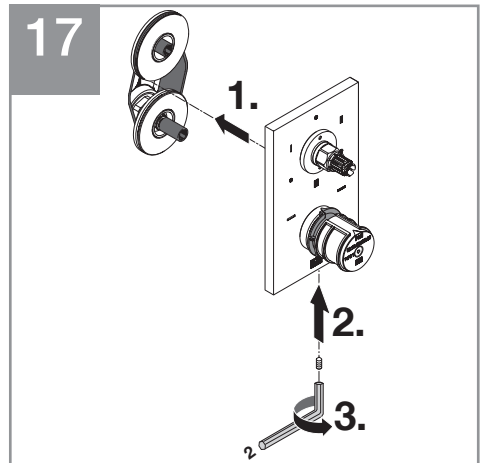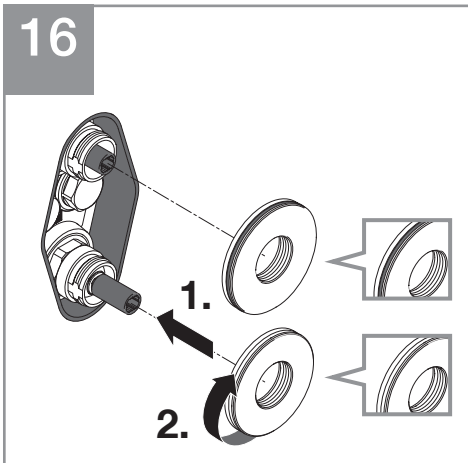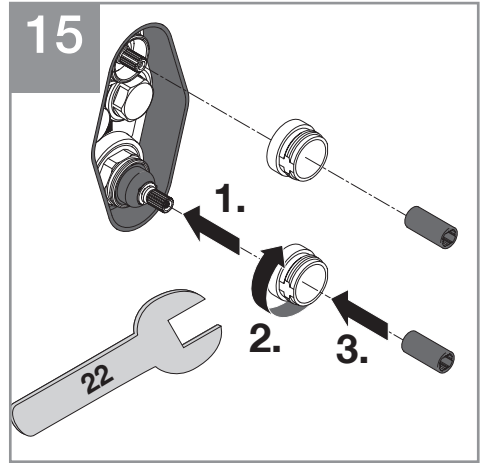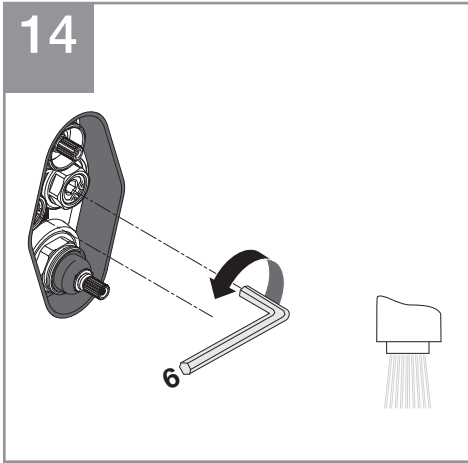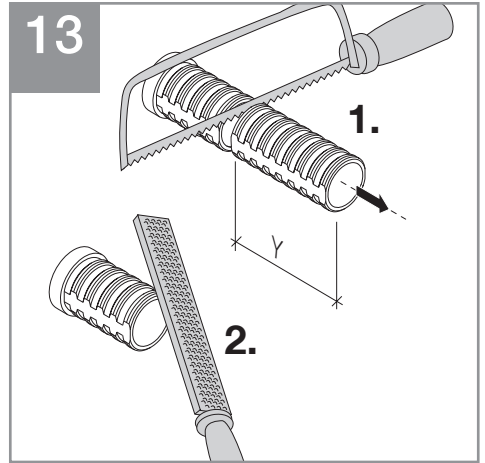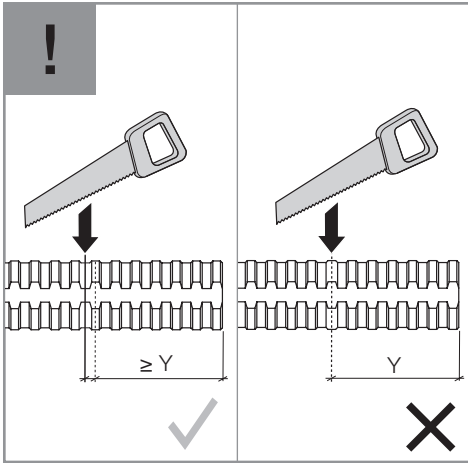

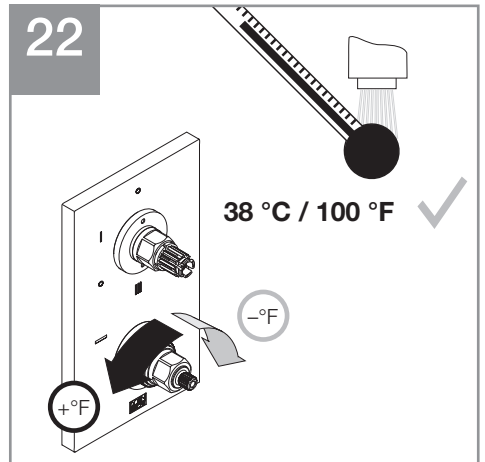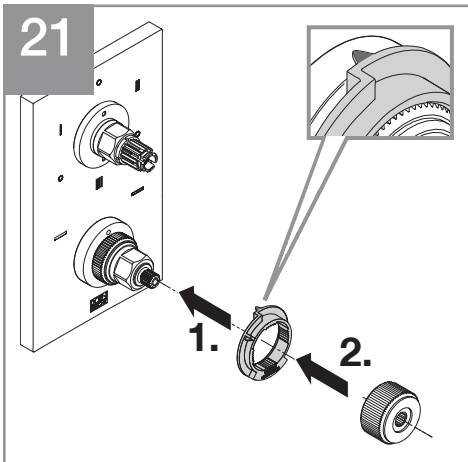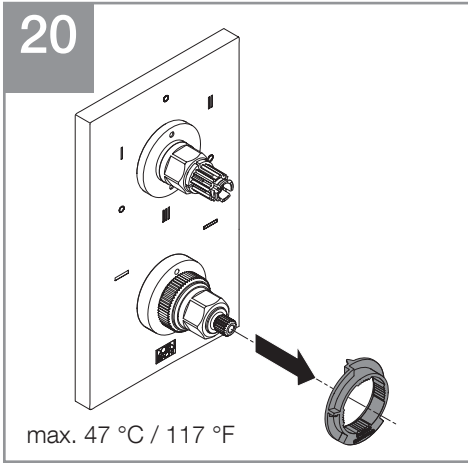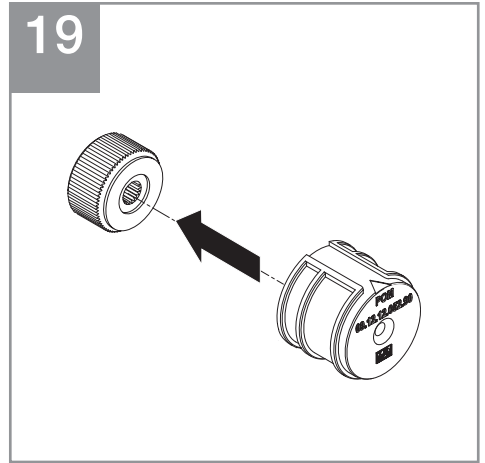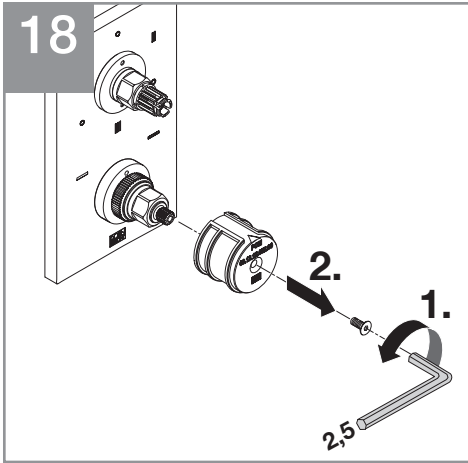

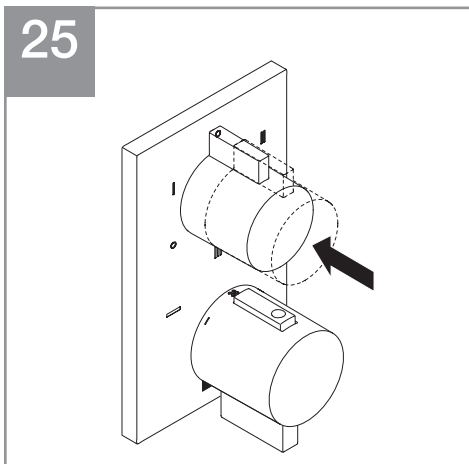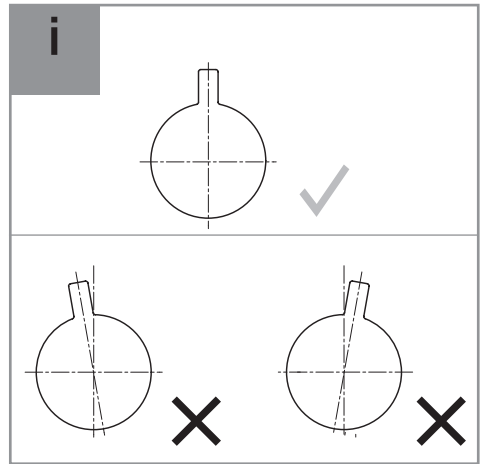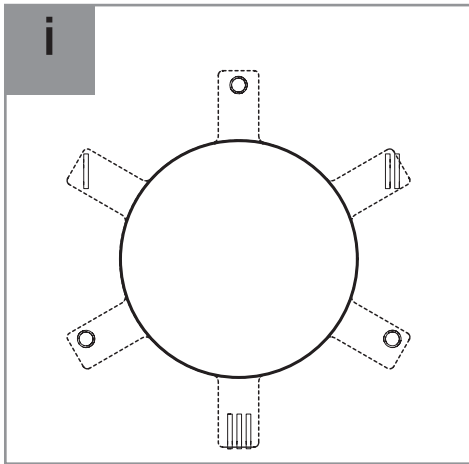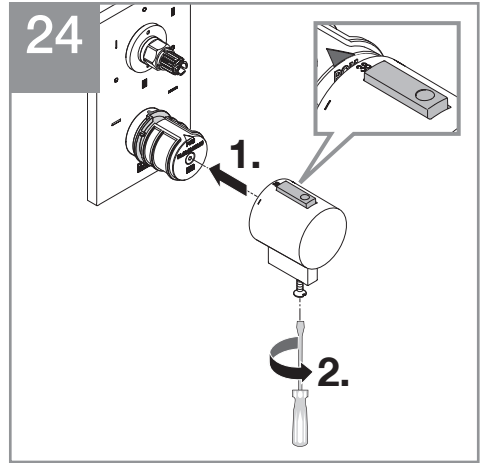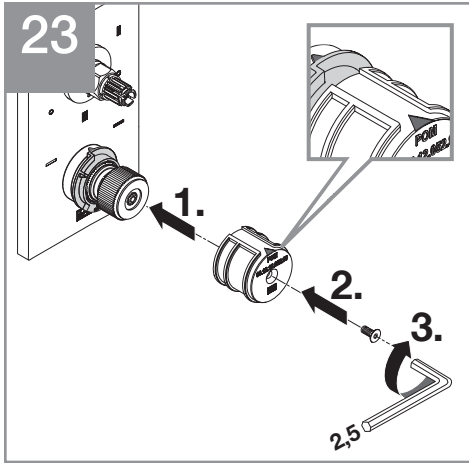


36 428 670-FF 0010

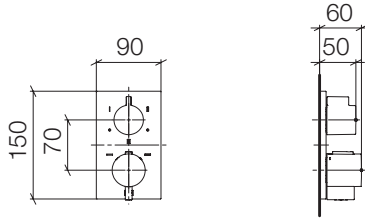


mm

36 428 710-FF 0010

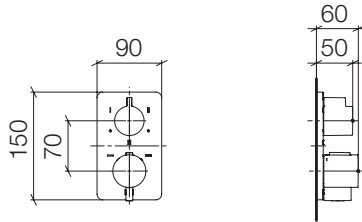


mm

36 428 845-FF 0010

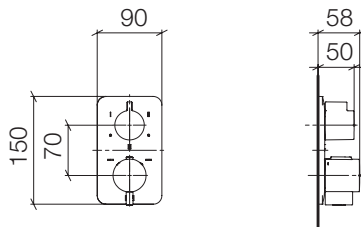


mm
Inch = mm x 0,0394

36 428 970-FF 0010

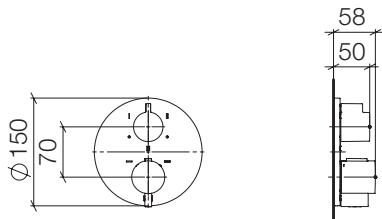

mm

36 428 977-FF 0010

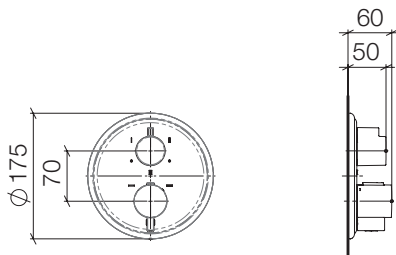

mm


Inch = mm x 0,0394

Operating conditions

Cold water temperature range	41 - 77 °F
Hot water temperature range	131 - 149 °F
Recommended flow temperature	140 °F
Thermal disinfection (3 - 10 Min.)	≤ 194 °F
Minimum flow pressure	15 psi
Maximum flow pressure	73 psi
Recommended flow pressure	45 psi

In order for the noise levels to comply with the national requirements, a pressure reducer must be installed in the supply line at a static pressure above 5 bar / 73 psi.

The thermostat meets the requirements according to EN 1111.

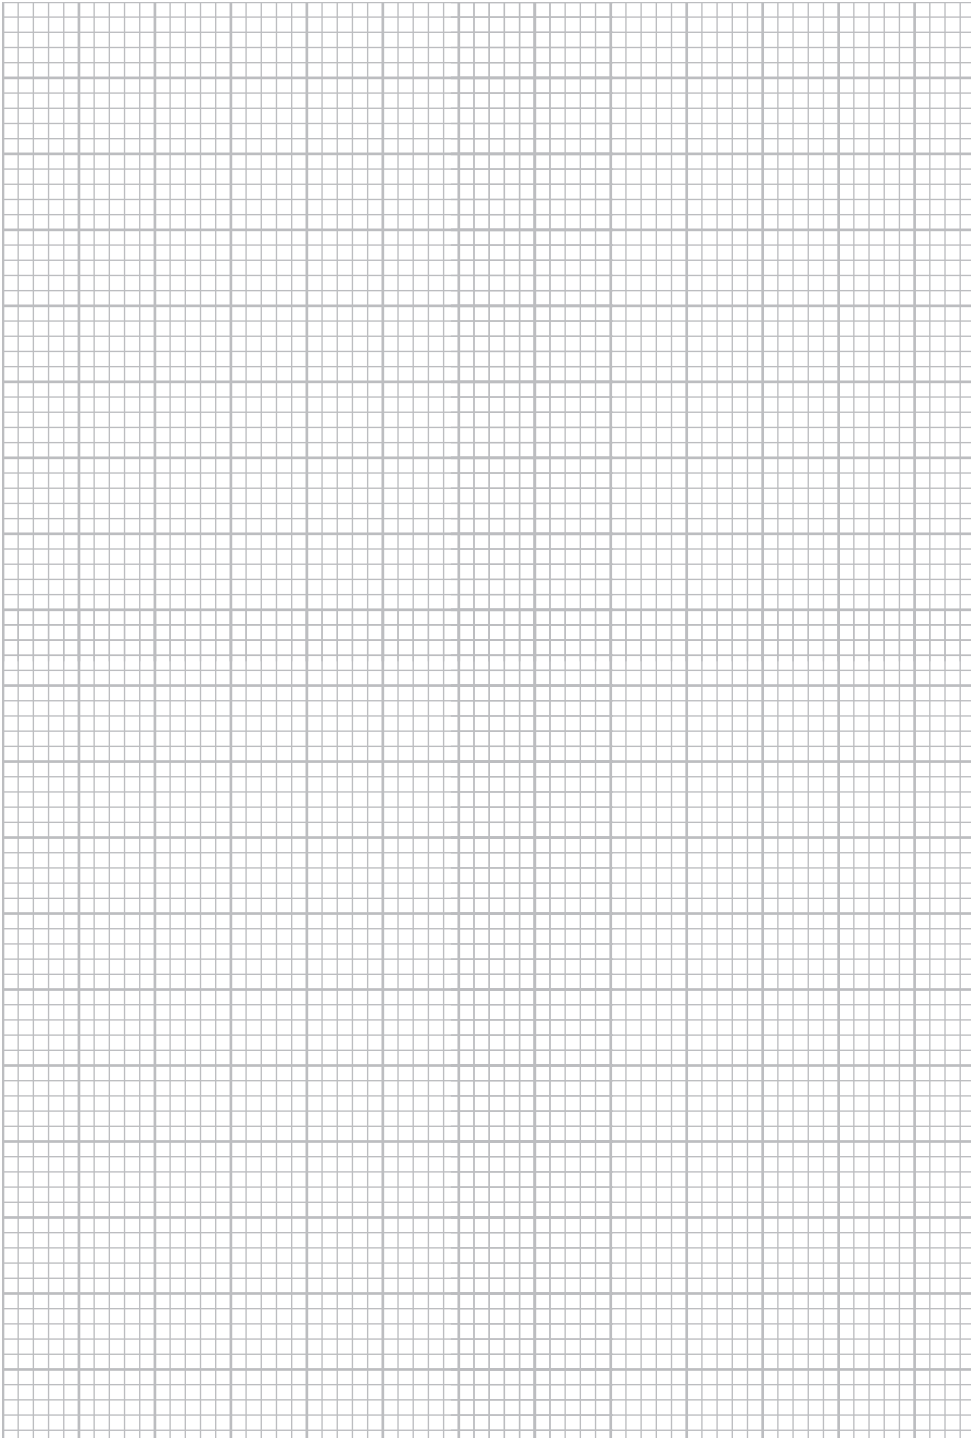

Aloys F. Dornbracht GmbH & Co. KG Armaturenfabrik
Köbbingser Mühle 6, D-58640 Iserlohn
Tel. +49(0)2371433-0, Fax +49(0)2371433-232
mail@dornbracht.de, dornbracht.com

Dornbracht Group

Premium Solutions for Interior Architecture



01 03 16 001 00 / 11.2017