



Shower - Series–various

BIG RAIN Rain panel for flush ceiling installation manual control - polished stainless steel

Article number: 41 401 979-85 0010



- 7-7/8" x 6-1/4" headshower, 99 jets
- 14-1/8" x 11" body shower, 142 jets
- 23-5/8" x 18-7/8" stainless steel cover plate
- 2x 1/2" flex lines
- 4x mounting pins
- Pre-assembled stainless steel casing
- Descaling system

Technical data:

- Max Flow rate for each rain function: 2.5 gpm
- minimum working pressure = 29 Psi
- maximum working pressure = 58 Psi
- Weight: 27 lbs

Technical data:

Plumbing:

- Water softening device recommended
- For choosing the drainage, take into consideration the output of items in the shower, the specific demand needs to be assessed.
- Supply line (hot/cold): 2 x 3/4"
- Must be installed with diverter (rough included).
- Diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously.
- Diverter trim is sold separately
- Please refer to Planning Guide for proper sizing and installation methods



polished stainless steel

All dimensions in mm / inch = mm x 0,0394




Shower - Series-various

BIG RAIN Rain panel for flush ceiling installation manual control - polished stainless steel

Article number: 41 401 979-85 0010

Flow rate chart

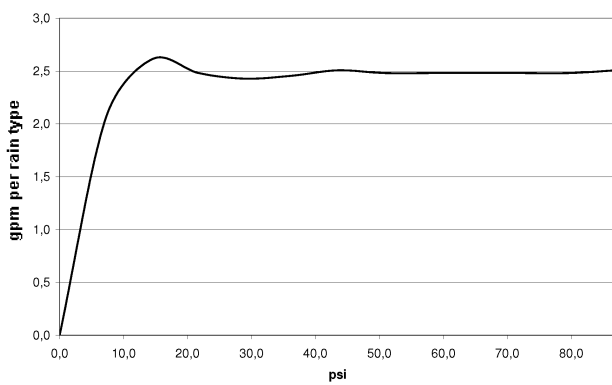



Shower - Series—various

BIG RAIN Rain panel for flush ceiling installation manual control - polished stainless steel

Article number: 41 401 979-85 0010

Other surface finishes



matte stainless steel

41 401 979-86 0010

More custom finish options are available via special production (xTra Service). Please see our finish matrix for availability and pricing or contact a Dornbracht representative.