Melody DY-BTS35 Electric Fireplace

ireplace



Specifications Sheet

Model	Circuit	Max. Power	Lighting Only	Standby	Outlet	Viewing Area	BTU	Cord Length
DY-BTS35	15A, 120V / 60HZ	1500 W	27 W	1.5 W	• Standard (type B)	840 mm W x 506 mm H	5000	1829 mm
DI-DI333	13A, 120V / 80HZ	1300 W	27 VV	1.5 VV	 Hardwire ready 	33 in. W x 20 in. H	3000	72 in.
		• Power corc		B A n the top	right corner when faci	o ing the fireplace	F G	

Model	А	В	С	D	E	F	G	Н	I
DY-BTS35	872 mm	840 mm	739 mm	506 mm	110 mm	325 mm	220 mm	315 mm	15 mm
D1-01355	34 ¾ in.	33 in.	29 in.	20 in.	4 ⅔ in.	12 ¾ in.	8 % in.	12 ¾ in.	1∕₂ in.

Certification




Melody DY-BTS35 Electric Fireplace

Specifications Sheet




Clearances

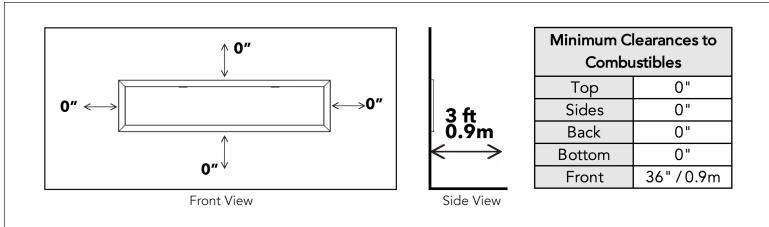

- No clearance requirements on top, bottom, left, and right sides of the fireplace in 1-sided, 2-sided, or 3-sided configuration
 - Keep furniture, drapery or items at least 3 ft / 0.9m away from the front of the fireplace

Framing

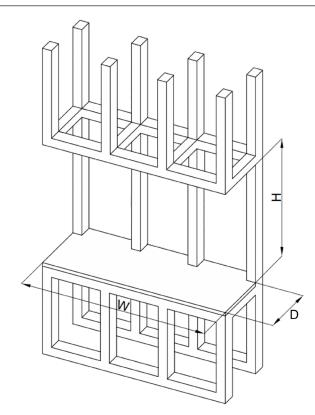

Framing Dimensions

W	Н	Depth	
850 mm	749 mm	320 mm	
33 ½ in.	29 ½ in.	12 ½ in.	

Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury



Dynasty Fireplaces 3231 No. 6 Road, Unit 127 Richmond, BC V6V 1P6 Canada +1 877-521-1009 | 604-821-1009 | support@dynastyfireplaces.com Visit Us: **dynastyfireplaces.com**

