
# **Cascade 64" Electric Fireplace**

### **Specifications Sheet**



Model	Length	Height	Depth	Viewing Area	BTU	Cord Length
DY-BTX64	1638 mm	514 mm	165 mm	1505 mm x 381 mm	5000	1829 mm
	64 ½ in.	20 ¼ in.	6 ½ in.	6 ½ in. 59 ¼ in. x 15 in.		72 in.

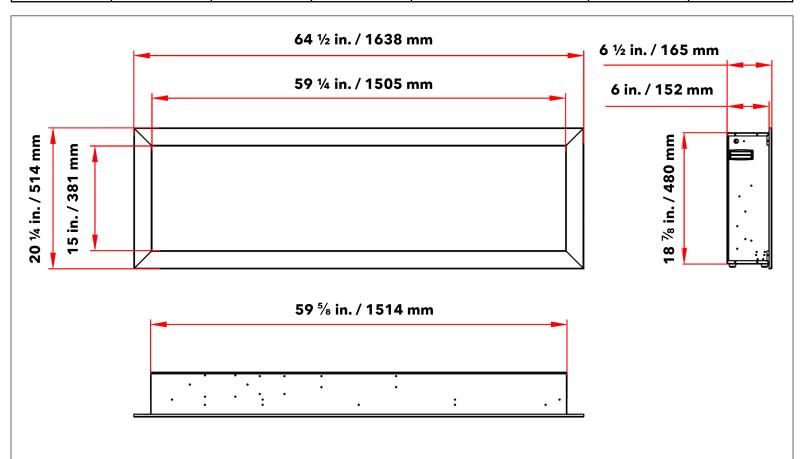

#### **Electrical Specifications**


Circuit	Max Power Consumption	Lighting Only	Standby	Outlet	Certification
15A, 120V / 60Hz	1500 W	34 W	1.5 W	Standard (type B)	CSA


# Cascade 64" Electric Fireplace

**Specifications Sheet** 




### **Clearances**

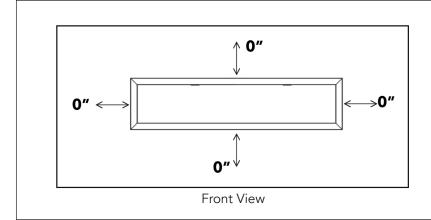



Minimum Clearances to Combustibles				
Тор	0"			
Sides	0"			
Back	0"			
Bottom	0"			
Front	36" / 0.9m			

#### **Framing**

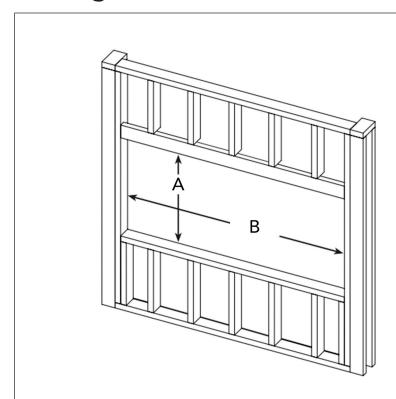

Framing Dimensions				
А	19 ½ in.			
<b>A</b>	495 mm			
В	60 ¾ in.			
ט	1543 mm			
Depth	6 in.			
Deptil	153 mm			

Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury



