Cascade 74" Electric Fireplace

Specifications Sheet



DY-BTX74 1892 mm 514 mm 165 mm 1759 mm x 381 mm 5000 1829 mm 74 ½ in. 20 ¼ in. 6 ½ in. 69 ¼ in. x 15 in. 5000 72 in. 74 ½ in. / 1892 mm 69 ¼ in. / 1759 mm 6 ½ in. / 165 mm 6 ½ in. / 1759 mm 6 ½ in. / 1758 mm 69 ½ in. / 1768 mm	DY-B1X/4 74 ½ in. 20 ¼ in. 6 ½ in. 69 ¼ in. x 15 in. 5000 72 in. 74 ½ in. / 1892 mm 6 ½ in. / 165 mm 6 ½ in. / 165 mm 6 ½ in. / 165 mm 9 ½ in. / 1759 mm 10 ½ in. / 165 mm 6 in. / 152 mm 9 ½ in. / 165 mm 6 ½ in. / 165 mm 6 in. / 152 mm 9 ½ in. / 165 mm 9 ½ in. / 165 mm 9 ½ in. / 165 mm 10 ½ in. / 165 mm 9 ½ in. / 165 mm 10 ½ in. / 165 mm	74 ½ in. 20 ¼ in. 6 ½ in. 69 ¼ in. x 15 in. 5000 72 in. 74 ½ in. / 1892 mm 6 ½ in. / 165 mm 6 ½ in. / 152 mm 100	Model	Length	Height	Depth	Viewing Area	BTU	Cord Length
74 ½ in. 20 ½ in. 6 ½ in. 1892 mm 69 ½ in. / 1892 mm 69 ½ in. / 1759 mm 6 ½ in. / 165 mm 6 in. / 152 mm 9 ½ in. / 165 mm 6 ½ in. / 165 mm 6 ½ in. / 165 mm 6 ½ in. / 165 mm	74 ½ in. / 1892 mm 6 ½ in. / 165 mm 6 ½ in. / 165 mm 6 ½ in. / 165 mm 6 ½ in. / 152 mm 0 ¼ in. / 1759 mm	74 ½ in. 20 ¼ in. 6 ½ in. 72 in. 74 ½ in. 1892 mm 6 ½ in. 6 ½ in. 165 mm 6 ½ in. 1759 mm 6 ½ in. 165 mm 6 in. 152 mm 1 1 1 150 mm 6 ½ in. 165 mm 6 ½ in. 165 mm 1 1 1 1 1 1 152 mm 6 ½ in. 1 152 mm 1 <td></td> <td>1892 mm</td> <td>514 mm</td> <td>165 mm</td> <td>1759 mm x 381 mn</td> <td>n 5000</td> <td>1829 mm</td>		1892 mm	514 mm	165 mm	1759 mm x 381 mn	n 5000	1829 mm
69 ¼ in. / 1759 mm 6 ½ in. / 165 mm 6 in. / 152 mm 10 152 mm 10 152 mm	69 ¼ in. / 1759 mm 6 ½ in. / 165 mm 6 in. / 152 mm 10 1 152 mm 10 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	69 ¼ in. / 1759 mm 6 ½ in. / 165 mm 6 in. / 152 mm 9 ½ ii. / 152 mm 9 ½ ii. / 165 mm 9 ½ ii. / 152 mm 9 ½ ii. / 158 mm		74 ½ in.	20 ¼ in.	6 ½ in.	69 ¼ in. x 15 in.		72 in.
		69 % in. / 1768 mm						6 in. / 1	52 mm
			20 ¼ i		69	5% in. / 1768 r	nm		∞ o
					· ·				
					•	•	: :		


15A, 120V / 60Hz 1500 W 41 W 1.5 W Standard (type B) CSA	Circuit	Max Power Consumption	Lighting Only	Standby	Outlet	Certification
	15A, 120V / 60Hz	1500 W	41 W	1.5 W	Standard (type B)	CSA

Cascade 74" Electric Fireplace


Specifications Sheet



Clearances

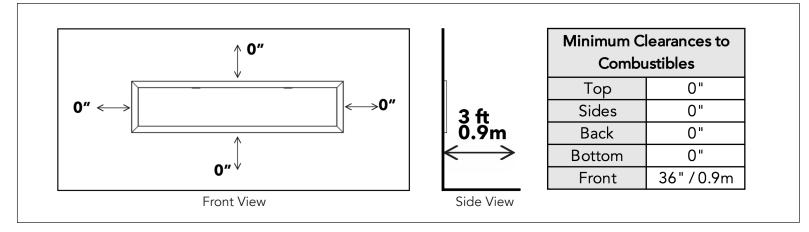

Framing

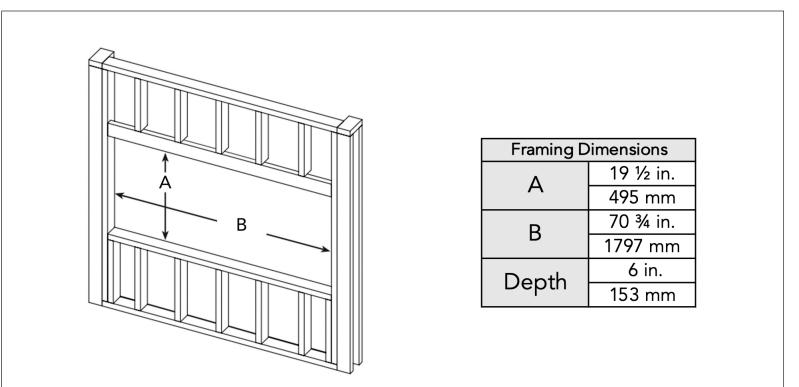

Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury



Dynasty Fireplaces, Ltd. 10-3071 No. 5 Road, Richmond, BC V6X 2T4 Canada +1 877-521-1009 | 604-821-1009 | support@dynastyfireplaces.com | dynastyfireplaces.com

