

Installation manual for 2117G48C/RC

Dimensions : L47.7" W7.5" H7" L11

Collection : CUVETTE

Bulb Type : G9 bulb, not include bulb

Lamp Frame Weight : 34.76 LBS

Total Weight : 40.26 LBS



Thank you for choosing our product(s).


Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, please contact the retailer Where the purchased was made.



SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.


CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 - 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions. where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

Frame Assembly Diagram

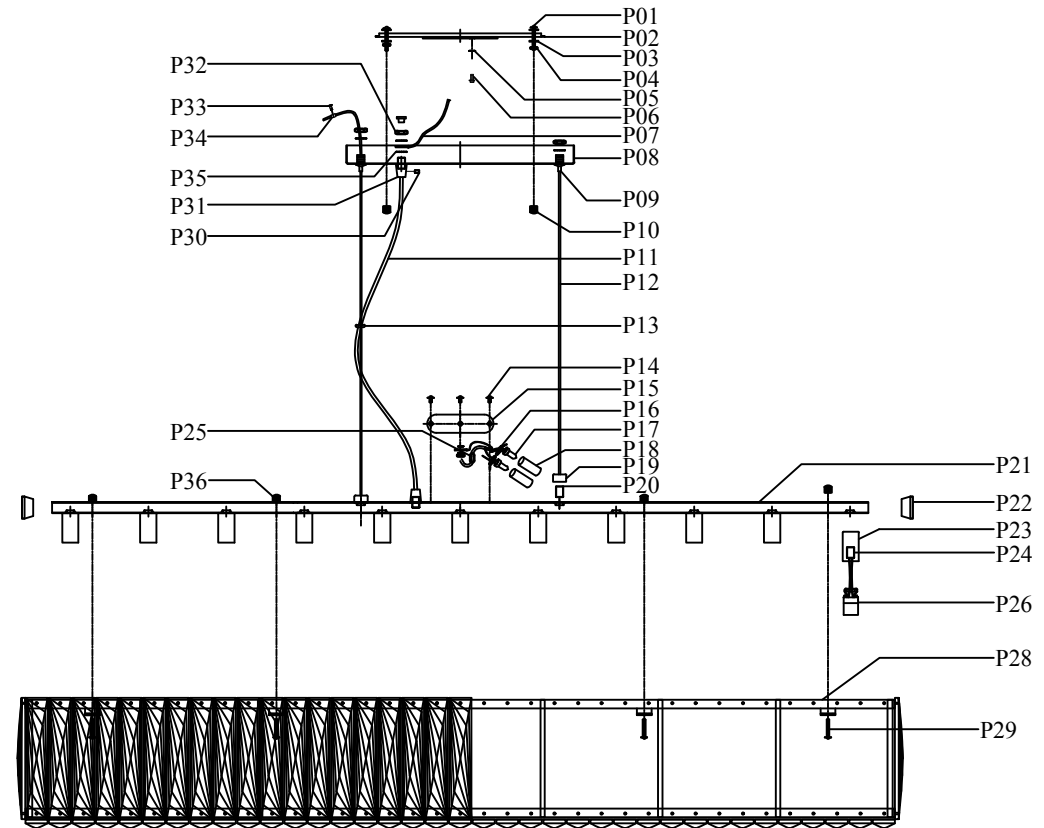





























2117G48 L47.7" W7.5" H7" L11

Step 1














Please use the parts list to ensure you are not missing any parts.

2117G48

part	picture	Description	Qty	Check list
ZA		Electrical box(not include)	1	
ZB		GND	1	
ZC		Junction Caps	3	
ZD(P02)		Mounting bracket(L9.1"*W4")	1	
ZE(P08)		Canopy(L12.2"W4.7"H1",Chrome)	1	
ZF(P10)		M5 Knurled nut	2	
ZG		Mounting bracket screw	2	
P01		M4 Mounting bracket screw(L1.2")	2	
P02		Mounting bracket(L9.1"*W4")	1	
P03		Washer (Ø0.5"*T0.03")	4	
P04		M5 Hex nut	2	
P05		M10 Lock washer	4	
P06		Ground screw	1	
P07		GND	1	
P08		Canopy(L12.2"W4.7"H1",Chrome)	1	
P09		Cable adjustment bolt	2	
P10		M5 Knurled nut	2	
P11		Clear Round Electrical Wire(L138",18#)	1	
P12		Steel cope L118"	2	
P13		Plastic washer	2	
P14		M4 Flange bolt(L0.23")	3	
P15		Two holes steel bracket (L3.5"W1")	1	
P16		Cable tie	6	
P17		Junction caps	6	
P18		Heat shrink tubing	6	
P19		Metal finial(Ø0.8"H0.4")	2	
P20		M10 Nipple (L0.6")	2	
P21		Pipe (L43.7"H0.6")	1	

03

2117G48 L47.7" W7.5" H7" L11

Part	Picture	Description	Qty	Check list
P22		Pipe plug	2	
P23		Socket cover(Ø0.9"H1.7",Chrome,Iron)	11	
P24		M10 Nipple (L0.6")	11	
P25		Cable buckle	2	
P26		G9 Socket	11	
P28		Crystal frame body with crystal (L47.7"W7.5"H7")	1	
P29		M4 Mounting bracket screw(L1")	4	
P30		M4 Plastic Nipple	2	
P31		Power wire adjustment bolt	2	
P32		M10 Hex nut	17	
P33		M4 Nipple	4	
P34		Wire rope clamp	4	
P35		M10 Lock washer	18	



04

Part	Picture	Description	Qty	Check list

Part	Picture	Description	Qty	Check list

Step 2

Canopy Installation Instruction

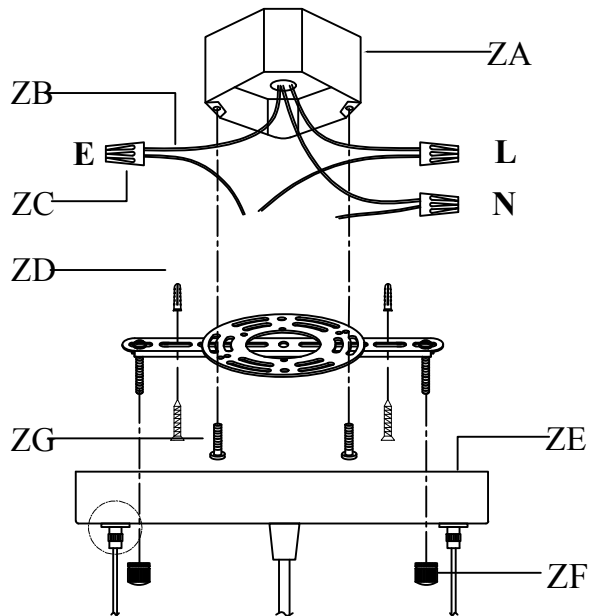

When adjusting the height of the steel wire, the telescopic metal part A toothed outer ring can only twist half a turn, and then pull it up to adjust the height!!!

"L"=Hot wire
"N"=Neutral wire
"E"=GND

07


IMPORTANT: Test sockets with bulb before dressing the fixture.

- 1 .Attach the Mounting bracket (ZD) to the electrical box (ZA).
- 2 .Pull wires up through the Junction Caps (ZC).
- 3 .Attach the Canopy (ZE) to the ceiling panel.
- 4 .Make the electrical connections as detailed in the drawing above.

08

Step 3

Frame Assembly Diagram

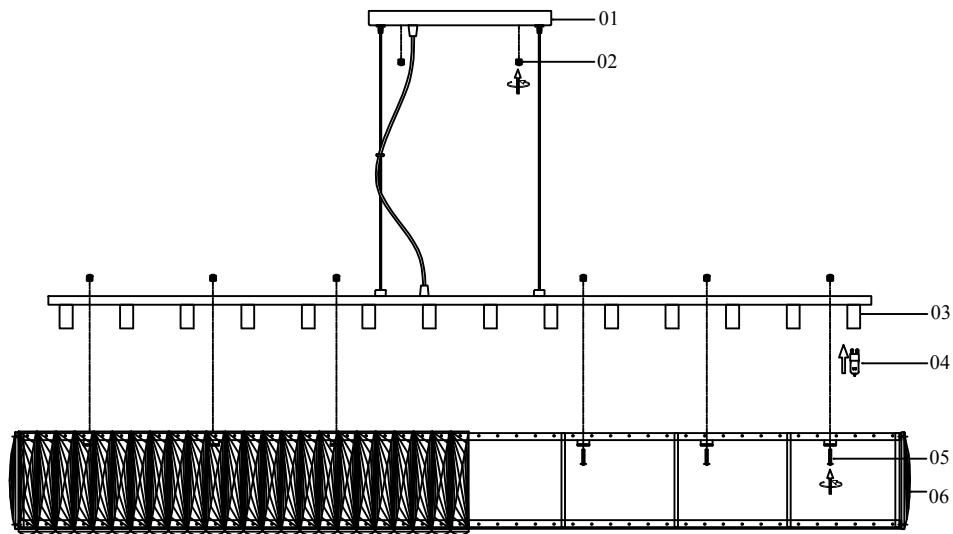

⑨

Frame Assembly Instructions

Installation:

Please read all instructions carefully. Before you proceed to install make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

1. Install G9 Bulb(04) to G9 Socket(03).
2. Put the Light body ring on Crystal frame body with crystal (05).
3. Use Knurled nut(02) to fasten Canopy(01) together with Mounting bracket of Ceiling panel.

⑩

Congratulations !

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

Cleaning and Maintenance of Chandelier Frame
The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals
Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts
Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us . For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle . You will be contacted with prices prior to shipment. All orders must be pre-paid.

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of one (1) year from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department.

A written return authorization form will be sent to you with specific instructions.

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warranty, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.