

# Installation manual for 2117G60C/RC

Dimensions : L60" W7.5" H7" L14

Collection : CLVETTE

Bulb Type : G9 bulb, not include bulb

Lamp Frame Weight: 43.12 LBS Total Weight: 49.72 LBS



Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, please contact the retailer Where the purchased was made.



#### SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

#### CAUTION


- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit: 110 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

### Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions.

where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

## Frame Assembly Diagram

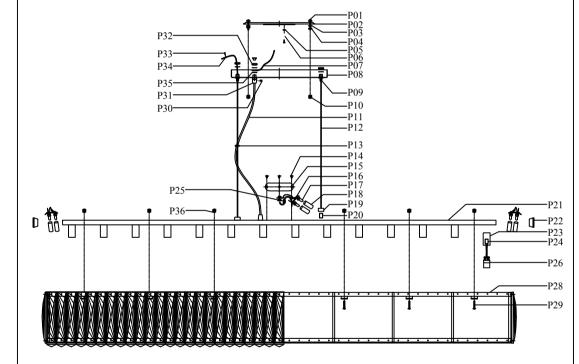

### Step 1

Please use the parts list to ensure you are not missing any parts.

## 2117G60

part	picture	Description	Qty	Check list
ZA		Electrical box(not include)	1	
ZB		GND	1	
ZC		Junction Caps	3	
ZD(P02)		Mounting bracket(L9.1"*W4")	1	
ZE(P08)		Canopy(L12.2"W4.7"H1",Chrome)	1	
ZF(P10)		M5 Knurled nut	2	
ZG	(Cumming)	Mounting bracket screw	2	
P01	₩	M4 Mounting bracket screw(L1.2")	2	
P02		Mounting bracket(L9.1"*W4")	1	
P03	0	Washer(\$\phi_0.5"*T0.03")	4	
P04		M5 Hex nut	2	
P05	*****	M4 Lock washer	4	
P06	<u> </u>	Ground screw	1	
P07		GND	1	
P08		Canopy(L12.2"W4.7"H1",Chrome)	1	
P09	<b>=</b>	Cable adjustment bolt	2	
P10		M5 Knurled nut	2	
P11		Clear Round Electrical Wire(L138",18#)	1	
P12		Steel cope L118"	2	
P13		Plastic washer	2	
P14	₽	M4 Flange bolt(L0.23")	3	
P15	• • •	Two holes steel bracket (L3.5"W1")	1	
P16		Cable tie	6	
P17	a	Junction caps	6	
P18		Heat shrink tubing	6	
P19		Metal finial(Ø0.8"H0.4")	2	
P20	<b>(</b> )))))))	M10 Nipple (L0.6")	2	
P21		Pipe (L55.1"H0.6")	1	


Part	Picture	Description	Qty	Check list
P22	]# <del>  </del>	Pipe plug	2	
P23	0	Socket cover(Ø0.9"H1.7",Chrome,Iron)	14	
P24	<b>()</b>	M10 Nipple (L0.6")	17	
P25	00	Cable buckle	2	
P26		G9 Socket	14	
P28		Crystal frame body with crystal (L60"W7.5"H7")	1	
P29	₩	M4Mounting bracket screw(L1")	9	
P30	<b>(</b> )	M4 Plastic Nipple	2	
P31	Ō	Power wire adjustment bolt	2	
P32		M10 Hex nut	30	
P33	0000	M4 Nipple	4	
P34	•	Wire rope clamp	4	
P35	****	M10 Lock washer	18	


Part	Picture	Description	Qty	Check list

Part	Picture	Description	Qty	Check list

Step 2

## Canopy Installation Instruction





When adjusting the height of the steel wire, the telescopic metal part A toothed outer ring can only twist half a turn, and then pull it up to adjust the height!!! IMPORTANT: Test sockets with bulb before dressing the fixture.


- 1 . Attach the Mounting bracket (ZD) to the electrical box (ZA).
- 2. Pull wires up through the Junction Caps(ZC).
- 3 .Attach the Canopy(ZE) to the ceiling panel.
- 4 . Make the electrical connections as detailed in the drawing above.

"L"=Hot wire
"N"=Neutral wire
"F"=GND



Step 3

## Frame Assembly Diagram

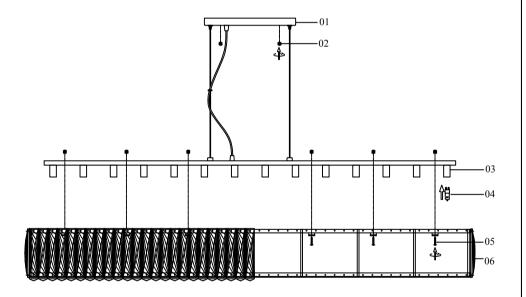

## Frame Assembly Instructions

#### Installation:

Please read all instructions carefully. Before you proceed to install make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

- 1. Install G9 Bulb (04) to G9 Socket (03).
- 2. Put the Light body ring on Crystal frame body with crystal (05).
- 3. Use Knurled nut(02) to fasten Canopy(01) together with Mounting bracket of Ceiling panel.

## Congratulations!

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

Cleaning and Maintenance of Chandelier Frame
The finish on our chandelier frames and fixture
frames is protected by a durable coating of
lacquer. To clean, use a clean soft, dry cloth. Do
not use any metal polishes, cleaners, abrasives
or any substance which could remove the
protective finish. Failure to follow these
instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts
Should you require replacement crystals or pins
(the metal connectors attaching the crystals),
contact the store where the product was
purchased or contact us. For ease of ordering,
you may use the original crystal trimming
instructions provided with this product and
circle the items you wish to order, indicating
the quantity by writing the number needed
adjacent to the circle. You will be contacted
with prices prior toshipment. All orders must be
pre-paid.