



Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, please contact the retailer Where the purchased was made.



2502D32BK D32"W32"H19.3"L10

SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

CAUTION


- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 $130 \ensuremath{V}/60 \ensuremath{\text{Hz}}$
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions.

where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

Frame Assembly Diagram

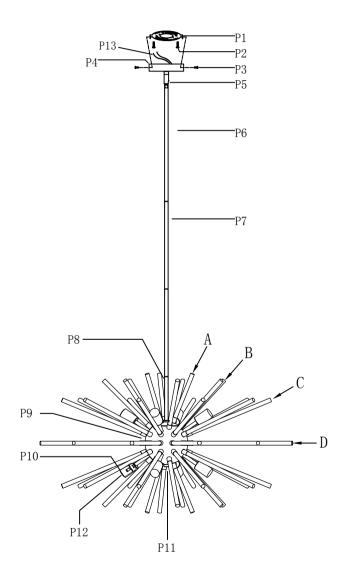

(01)

02

2502D32BK D32"W32"H19.3"L10

Step 1

Please use the parts list to ensure you are not missing any parts.

2502D32BK


PARTS LIST

Part	Picture	Description	Qty
P1		Mounting bracket $\Phi4.53$ "*H0.59"	1
P2		Mounting bracket screw	2
Ρ3	Ļ	Screw	2
P4		Canopy (Ф4.7"*H1")	1
Р5		Universal head (Φ0.59"*H2.24")	1
P6		Rod (L16"*Φ0.5")	1
Ρ7		Rod (L12"*Φ0.5")	2
P8		Rod (L6"*Φ0.5")	1
Р9	\bigcirc	ball (Φ5.9")	1
P10		E12 Socket Cup (Φ1.2"*H2.36")	10
P11		Nut(Φ0.6"*H0.3")	1
P12	Ŧ	E12 Socket	10
P13	%	UL18#,L144"	1
А	-	Glass Bar A(Ф0.5"*H7.7")	6
В	-	Glass Bar B(Ф0.5"*H9.3")	14
С	•□	Glass Bar C(Ф0.5"*H11.8")	20
D	•	Glass Bar D(Ф0.5"*H13.4")	12
	P1 P2 P3 P4 P5 P6 P7 P8 P9 P10 P11 P12 P13 A B C	P1 Image: Construction P1 Image: Construction P2 Image: Construction P3 Image: Construction P4 Image: Construction P4 Image: Construction P4 Image: Construction P4 Image: Construction P3 Image: Construction P4 Image: Construction P1 Image: Construction <td< td=""><td>P1 Mounting bracket Φ4.53"*H0.59" P2 Mounting bracket screw P3 I Screw P4 Canopy (Φ4.7"*H1") P5 I Canopy (Φ4.7"*H1") P6 Rod (L16"*Φ0.5") P7 Rod (L16"*Φ0.5") P8 Rod (L16"*Φ0.5") P9 ball (Φ5.9") P10 E12 Socket Cup (Φ1.2"*H2.36") P11 Nut(Φ0.6"*H0.3") P12 I E12 Socket P13 I Strew P14 I Glass Bar A(Φ0.5"*H7.7") B Glass Bar B(Φ0.5"*H9.3") Glass Bar C(Φ0.5"*H11.8")</td></td<>	P1 Mounting bracket Φ4.53"*H0.59" P2 Mounting bracket screw P3 I Screw P4 Canopy (Φ4.7"*H1") P5 I Canopy (Φ4.7"*H1") P6 Rod (L16"*Φ0.5") P7 Rod (L16"*Φ0.5") P8 Rod (L16"*Φ0.5") P9 ball (Φ5.9") P10 E12 Socket Cup (Φ1.2"*H2.36") P11 Nut(Φ0.6"*H0.3") P12 I E12 Socket P13 I Strew P14 I Glass Bar A(Φ0.5"*H7.7") B Glass Bar B(Φ0.5"*H9.3") Glass Bar C(Φ0.5"*H11.8")

2502D32BK D32"W32"H19.3"L10

Step 2

Canopy Installation Instruction

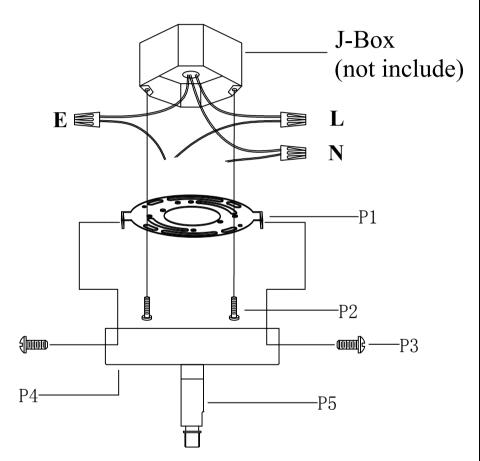

04)

"L"=Hot wire "N"=Neutral wire "E"=GND

2502D32BK D32"W32"H19.3"L10


IMPORTANT:Test sockets with bulb before dressing the fixture.

- 1 .Attach the Mounting bracket(P1) to the electrical box.
- 2 .Pull wires up through the Junction Caps.
- 3 .Attach the Canopy(P4) to the ceiling panel.
- 4 .Make the electrical connections as detailed in the drawing above.

2502D32BK D32"W32"H19. 3"L10

Step 3

Frame Assembly Diagram

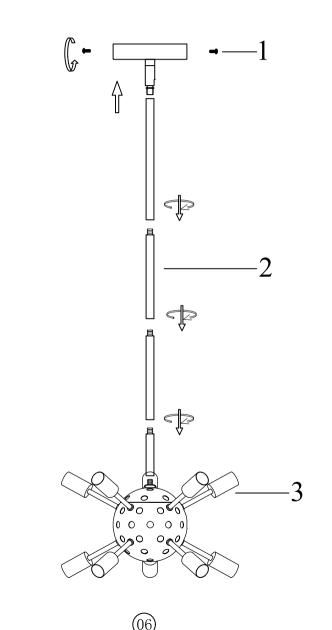

Frame Assembly Instructions

Installation:


Please read all instructions carefully. Before you proceed to install make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

- 1. Use Thumb screw(1) to fasten Canopy on Mounting bracket of Ceiling panel.
- 2. Install the rods(2) , lanp body(3) and canopy.

2502D32BK D32"W32"H19.3"L10

Step 4 Crystal Dressing Diagram



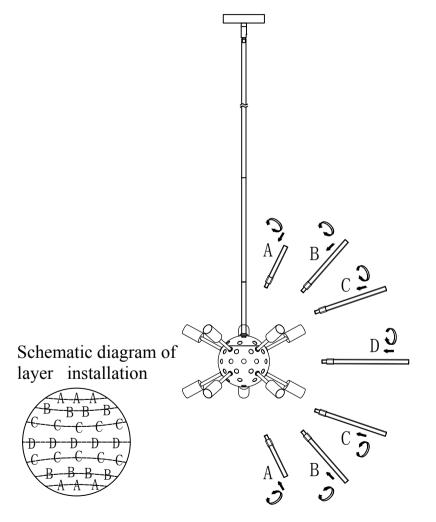

1. Twist the glass Bar A ,B,C,Dinto the corresponding hole

08)

Congratulations !

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

2502D32BK D32"W32"H19.3"L10

Cleaning and Maintenance of Chandelier Frame The finish on our chandelier frames and fixture frames is protected by a durable coating of lacquer. To clean, use a clean soft, dry cloth. Do not use any metal polishes, cleaners, abrasives or any substance which could remove the protective finish. Failure to follow these instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us . For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle . You will be contacted with prices prior toshipment. All orders must be pre-paid.

(10)

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of one (1) year from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department. A written return authorization form will be sent to you with specific instructions.

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reseserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warrantee, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.

(12)