

Installation manual for

3507D24C/3507D24G

Dimensions : D23.6" H23.6"

Collection : Solace

Bulb Type : 12*G9 Not include bulb

Lamp Weight: 7.7 LBS
Total Weight: 9.6 LBS



Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and

courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, please contact the retailer Where the purchased was made.



3507D24 D23.6" H23.6"

SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

CAUTION


- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit : 110 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions.

where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

Assembly Diagram

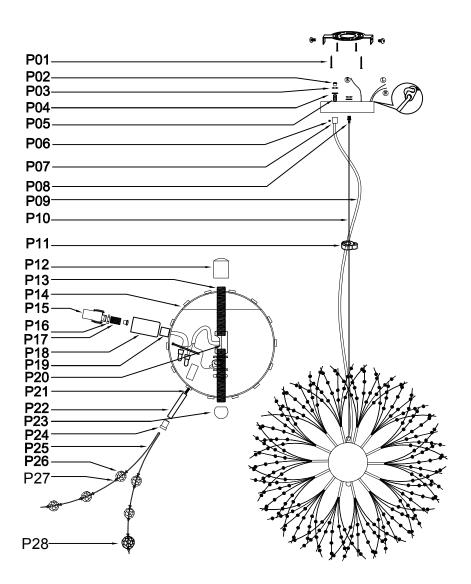

Please use the parts list to ensure you are not missing any parts.

3507D24

PARTS LIST

Part	Picture	Description	Parts number	Qty	Check	list
ZA		Junction box not included		1		
ZB		hanging panel		1		
ZC	₽≔	Crossbar Screws		2		
ZD		canopy		1		
ZE		M4*12 screw		2		
ZF	\	ground wire		1		
ZG	M	junction caps		2		
P01]########>	M4*40 screw		2		
P02		colloidal particle		13		
P03	θ	M10*T5 nut		16		
P04	8	screw pad		14		

 $3507D24 \ \text{D23.6}'' \ \text{H23.6}''$

Part	Picture	Description	Parts number	Qty	Check	list
P05		M10*20 threaded rod		1		
P06		M6*6 Meter screws		1		
P07		D14*16 Iron accessories		1		
P08	₽	M10*20 connector		1		
P09	Q	Three core transparent teflon		1		
P10	0	steel wire		1		
P11		fixation wire button		1		
P12		locking wire		1		
P13		M10*50 threaded rod		2		
P14	\bigcirc	Ball		1		
P15		G9 bulb		12		
P16	Ð	M10*T2.5 nut		12		


$3507D24 \ \text{D23.6} \text{\tt{''}} \ \text{H23.6} \text{\tt{''}}$

Part	Picture	Description	Parts number	Qty	Check	list
P17		M10*15 threaded rod		24		
P18		lamp cup		12		
P19		Iron accessories		12		
P20		M10*25 Bow word iron		1		
P21		M5*20 headless screw		70		
P22		Ø6*50 straight-bar		70		
P23	0	Ball nut		1		
P24	Д	Iron accessories		70		
P25	V	steel wire		210		
P26		10# Crystal		1050		
P27	۵	silicone ring		2520		
P28		12# Crystal		210		
P29		plastic anchor screw		2		

3507D24 D23.6" H23.6"

Step 2

Canopy Installation Instruction

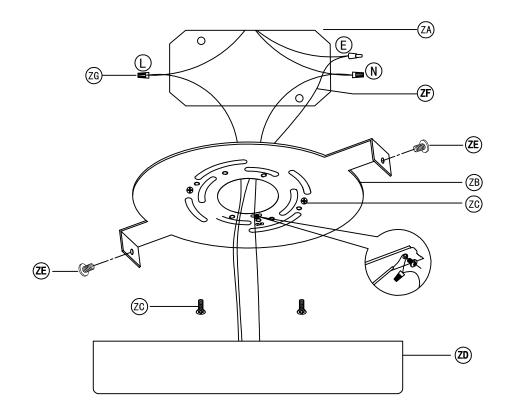


Frame Assembly Diagram

Trame Assembly Diag

IMPORTANT: Test sockets with bulb before dressing the fixture.

- 1. Attach the Crossbar (ZB) to the Junction Box (ZA) using the two crossbar screws (ZC) which are not supplied and should already be in your box.
- 2. Be sure when connecting the wire use electrician approved junction caps (ZG).
- 3. Stow the excess wire in the junction box(ZA).
- 4. Mounting screws (ZE), attach the fixture to the ceiling.

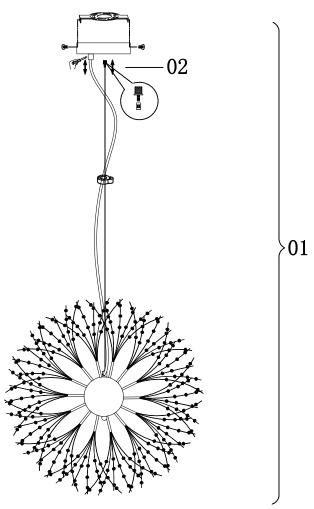

Frame Assembly Instructions


Installation:


Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

- 1. Fixed the Ceiling Cover on the Mounting Bracket (01), then put the screws tightened.
- 2. Please unscrew the cap (02) of the expansion part before adjusting the line, and then screw on the cap after adjusting the line.

Crystal Dressing Diagram

When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals

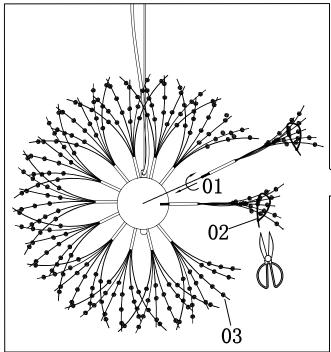



- 1. Firstly, align the tooth poles of all the crystal bundles with the inner teeth of the iron ball and tighten them clockwise (01);
- 2. Then cut the tie with scissors (02),

After spreading out, restore to original (03):



3507D24 D23. 6" H23. 6"

Congratulations!

You are now done installing your Elegant Lighting fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

Thank you.

Cleaning and Maintenance of Chandelier Frame
The finish on our chandelier frames and fixture
frames is protected by a durable coating of
lacquer. To clean, use a clean soft, dry cloth. Do
not use any metal polishes, cleaners, abrasives
or any substance which could remove the
protective finish. Failure to follow these
instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals
Wet a soft cotton fabric in clean warm water and
wipe gently, then polish with a dry soft cotton
fabric.

To Order Crystal Replacement Parts
Should you require replacement crystals or pins
(the metal connectors attaching the crystals),
contact the store where the product was
purchased or contact us. For ease of ordering,
you may use the original crystal trimming
instructions provided with this product and
circle the items you wish to order, indicating
the quantity by writing the number needed
adjacent to the circle. You will be contacted
with prices prior toshipment. All orders must be
pre-paid.

Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of one (1) year from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department. A written return authorization form will be sent to you with specific instructions.

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department . Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reseserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warrantee, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.