


Collection:Furlong Installation manual for:

LD2340 D28. 4"H1. 6"L3

Installation instructions:

- 1.Install the Rod(P5) and Canopy(P3) according to room height.
- 2. Secure Mounting bracket(P1) to the Junction box.
- 3.Insert screws(P2) in side of top unit the mounting bracket.
- 4.Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 5. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 6. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 7. Fix the Canopy(P3) to the Mounting bracket(P1) and tighten by the Nuts(P4).
- 8.Install the bulbs(bulbs not included) into the lampholder(P8).

The end!

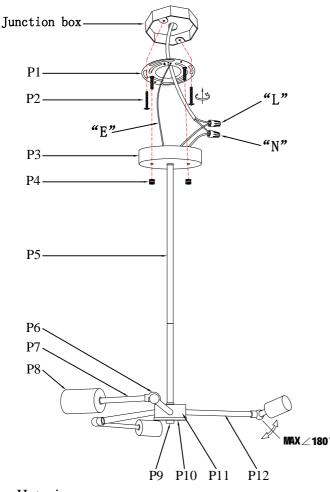

L'' = Hot wire
"N" = Neutral wire
"E" = Ground wire

PARTS LIST