## 

Collection:Halycon Installation manual for:

LD2353 W5. 9"E10. 5"H8. 3"L1

## Installation instructions:

1.Secure Mounting bracket(P1) to the junction box.


2.Insert screws(P2) in side of top unit the mounting bracket.

3.Black wire from ceiling(junction box) attaches to "L"wire from the fixture.

- 4. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 5. "E" wire from the fixture is attaced to the mounting bracket and an additional

"E" wire from the mounting bracket must be secured to the junction box. 6.Fix the Back plate(P3) to the Mounting bracket(P1) and tighten by the Nuts(P4). 7.Install the bulbs(bulbs not included) into the lampholder(P6).

The end!

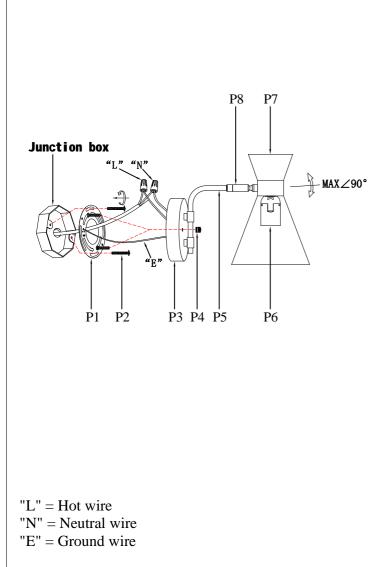

| FARIS LISI |                           |  |  |
|------------|---------------------------|--|--|
| picture    | Description               | Qty  | Check list   |
| Q.         | ø4.5″ Mounting<br>bracket | 1  |  |
| Januara    | 5/32-32 Screw             | 2  |  |
| •••        | ø4.7″Metal Back<br>plate  | 1  |  |
|            | M5 Nuts                   | 2  |  |
|            | L8″ Metal Tube            | 1  |  |
| Ē          | E26 Lampholder            | 1  |  |
|            | ø5.9"Lampshade            | 1  |  |
| Ĩ, ₽ĴIII   | Cardan joint              | 1  |  |
|            |                           |  |  |
|            |                           |  |  |
|            |                           |  |  |
|            |                           |  |  |
|            |                           |  |  |
|            | picture                   | pictureDescriptionØ4.5" Mounting<br>bracketØ4.5" Mounting<br>bracketØ4.7" Metal Back<br>plateØ4.7" Metal Back<br>plateDescriptionØ4.7" Metal Back<br>plateDescriptionØ4.7" Metal Back<br>plateØ5.9"Lampshade | pictureDescriptionQtyØ4.5" Mounting<br>bracket1Image: Solution of the state of th |