


Collection:Octavia

Installation manual for: LD4006D20 D19.7"H20.8"L5

Installation instructions:

- 1.Metal chain pass through canopy ring (P7) and canopy cover (P6) then hanging the quick link (P8) to canopy lock (P4) and the lamp body.
- 2. Power cord need to pass through the chain, canopy ring (P7), canopy plat (P6), canopy lock (P4) and clasp (P1).
- 3. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 4. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 5.Insert screws (P5) in side of top unit the mounting bracket (P2).
- 6. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 7. Using canopy ring (P7) lock the Canopy cover(P6).
- 8. Put the candle cover (P14) in lamp holder (P15).
- 9.Install the bulb(not included) in lamp holder (P15).

The end!

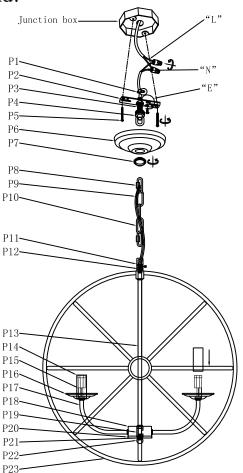

"L" = Hot wire "N" = Neutral wire "E" = Ground wire

PARTS LIST

part	picture	Description	Qty	Check	list
P1	8	Clasp	1		
P2	ë 0 ;	L4.1" Mounting bracket	1		
Р3		Threaded pipe	1		
P4	<u> </u>	Canopy lock	1		
Р5	ı	5/32-32 Screw	2		
P6	$\bigg] \bigg)$	ø 5.5″ Canopy cover	1		
P7	0	Canopy ring	1		
P8	0	Quick link	2		
Р9	Q	Power Cord 6.5' SPT-1 18# black	1		
P10	***	L59"CHAIN04	1		
P11		Loop	1		
P12	•	Threaded pipe	1		
P13	•	Thread pipe	1		
P14		∅1″*H2.4″ Candle cover metal	5		
P15	لدت	E12 Lamp holder	5		
P16	\triangleright	Ø 3.2″Metal cover	5		
P17		Metal arm	5		
P18		ø 2.3″Metal part	1		
P19		Hickey	1		
P20		♥2.4"Metal cover	1		
P21		Threaded pipe	1		
P22	0	Round Nut	1		
P23	₩	Metal part	1		