


Collection:Serif

Installation manual for: LD4028W29 W28.8"H5.6"E6.2"L5

Installation instructions:

- 1. Using the screw (P3) secure the mounting bracket (P1) to the junction box.
- 2. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 3. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 4. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 5.M4 screw (P2)pass through the holes in canopy plate and tighten by nut (P6).
- 6.Install the bulb(not included) in lamp holder (P10).

The end!

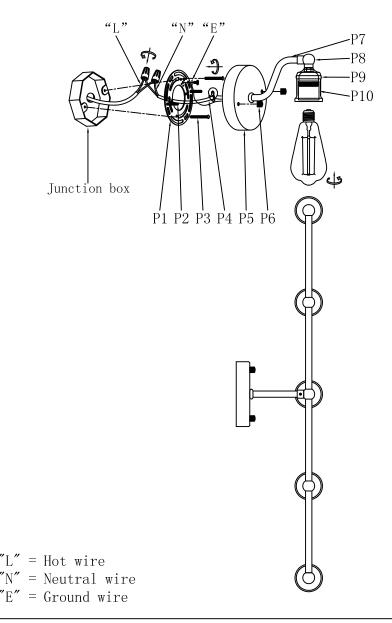

PARTS LIST

picture Description Qty Check list

| part | picture | Description | QLY | Спеск | IISt |
|------|---------|----------------------------------|-----|-------|------|
| P1 | | Ø 4.0" Mounting bracket | 1 | | |
| P2 | - | M4 Screw | 2 | | |
| Р3 | • | 5/32-32 Screw | 2 | | |
| P4 | ~ | Power Cord 9" SPT-1 18# black | 1 | | |
| P5 | | ∅ 4.7″Back plate | 1 | | |
| Р6 | • | Nut | 2 | | |
| P7 | | Metal arm | 1 | | |
| P8 | •••• | Metal arm | 1 | | |
| Р9 | | Lamp cup | 5 | | |
| P10 | | E26 Lamp holder | 5 | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |