Collection:Eclipse

Installation manual for:

LD6128BK D21" H9.5" L3

# Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert screws（P2） in side of top unit the mounting bracket.
6. Connect the top suction plate (P3) and the boom (P8),(P10),(P11) to the lamp body.
7. Place the top suction plate(P3) on the hanging plate (P1) and screw( P4) tightly.
8. Install E26 light source,no include bulb.
9. Place the glass cover (P20) on the semicircular cover (P16).

The end!

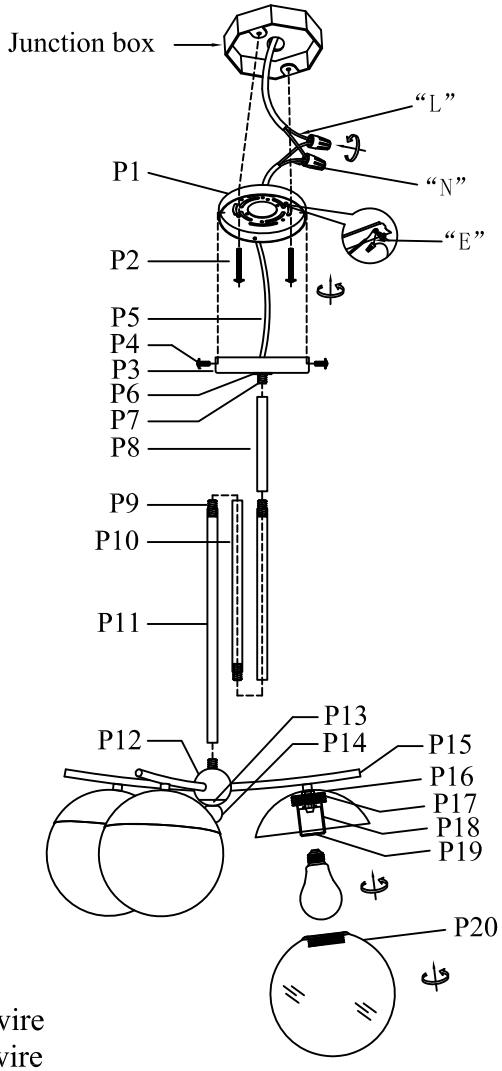


"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire

## PARTS LIST

| part | picture | Description | Qty | Check list |
|---|---|---|---|---|
| P1 | | D5.5″ Mounting bracket | 1 | |
| P2 | | 5/32-32 Screw | 2 | |
| P3 | | D6″ Canopy plat | 1 | |
| P4 | | 5/32-32 Screw | 3 | |
| P5 | | Power Cord 5' Black | 1 | |
| P6 | | D1.2″ Round flat gasket | 1 | |
| P7 | | Pipe Plug | 2 | |
| P8 | | D0.63″*L6″ ROD | 1 | |
| P9 | | Pipe Plug | 3 | |
| P10 | | D0.63″*L12″ ROD | 2 | |
| P11 | | D0.63″*L16″ ROD | 1 | |
| P12 | | D2.76″ Metal Wire Box | 1 | |
| P13 | | D2″ Wire Box | 1 | |
| P14 | | Cap nut | 1 | |
| P15 | | L8″ Straight pipe weldment | 3 | |
| P16 | | D7.28″ Semicircular cover | 3 | |
| P17 | | D2.16″ Screw die | 3 | |
| P18 | | Socket cover | 3 | |
| P19 | | E26 Socket | 3 | |
| P20 | | D8″ Milk Glass | 3 | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |