

LIVING DISTRICT

Collection:Briggs


Installation manual for:

LD646D32 D32"H6" L3

Installation instructions:

- 1.Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2.White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3."E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4.Secure mounting bracket to the junction box.
- 5.Insert screws (P4) in side of top unit the mounting bracket.
- 6.Connect the top suction plate (P5) and the boom (P9),(P10),(P11) to the lamp body.
- 7.Put the canopy (P5) on the mounting bracket (P1) and use the Cap nut (P6) to screw tighten.
- 8.Put the plastic pad (P21) into the glass lamp shade (P20), then put it into the socket (P19), and lock it with the lamp ring (P22).
- 9.Install E26 light source, no include bulb.

The end!

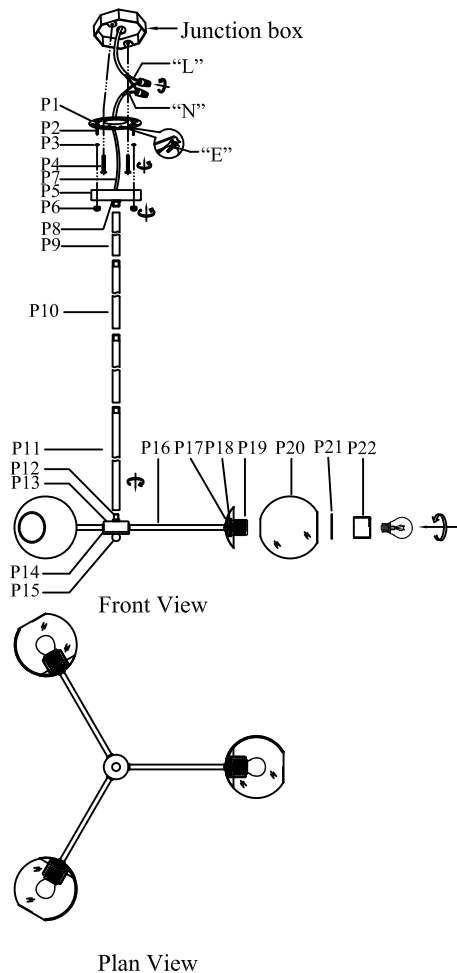

"L" = Hot wire
 "N" = Neutral wire
 "E" = Ground wire

PARTS LIST

Part	Picture	Description	Qty	Check list
P1		L4" Mounting bracket	1	
P2		5/32-32 Screw	2	
P3		Hex nut	2	
P4		5/32-32 Screw	2	
P5		D4.72" Canopy cover	1	
P6		Cap nut	2	
P7		Power Cord 5.2' Black/Gold	1	
P8		Coupling	2	
P9		D0.63"*L6" ROD	1	
P10		D0.63"*L12" ROD	2	
P11		D0.63"*L16" ROD	1	
P12		Pipe Plug	6	
P13		D2.36"Metal Wire Box	1	
P14		D2.48" Wire Box	1	
P15		Cap nut	1	
P16		D0.46"*L10" Tube	3	
P17		D3.94" Receiver bowl	3	
P18		D1.65" Straight edge cover	3	
P19		E26 Socket	3	
P20		D6"*H5.4" Glass lamp shade	3	
P21		Plastic pad	3	
P22		D2" Lamp ring	3	