IVING ISTRICT

Collection: Wells


Installation manual for:

LD654D18 D18"H25" L4

Installation instructions:

- 1.Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3."E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws (P4) in side of top unit the mounting bracket.
- 6.Put the canopy (P5) on the mounting bracket (P1) and use the Cap nut (P6) to screw tighten.
- 7.Put the plastic pad (P20) into the glass lamp shade (P18)(P19), then put it into the socket (P17), and lock it with the lamp ring (P21).
- 8.Install E26 light source, no include bulb.

The end!

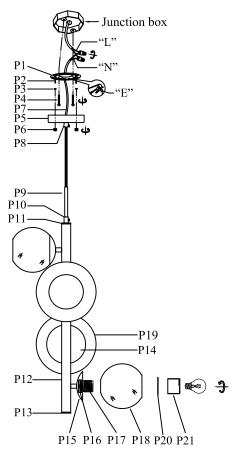

"L" = Hot wire

"N" = Neutral wire "E" = Ground wire

PARTS LIST

Part	Picture	Description	Qty	Check list
P1		L4" Mounting bracket	1	
P2		5/32-32 Screw	2	
Р3	()	Hex nut	2	
P4	_	5/32-32 Screw	2	
P5		D4.72" Canopy cover	1	
P6	D	Cap nut	2	
P7		Two-core Power Cord 5.6' Black	1	
P8	ū	Car iron parts	1	
P9		L4.13" Tube	1	
P10		Coupling	1	
P11	==	Pipe Plug	1	
P12		D1.2"*L24.8" Rod	1	
P13		Pipe Plug	1	
P14		D5.12" Receiver bowl	2	
P15		D3.94" Receiver bowl	2	
P16		D1.65" Straight edge cover	4	
P17		E26 Socket	4	
P18	\odot	D5.9"*H5.4" Glass lampshade	2	
P19	Õ	D7.9"*H7.5" Glass lampshade	2	
P20		Plastic pad	4	
P21		D2" Lamp ring	4	