

LIVING DISTRICT

Collection: Wells

Installation manual for:


LD655D18 D18"H25" L4

Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L" wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N" wire from the fixture.
3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert screws (P4) in side of top unit the mounting bracket.
6. Put the canopy (P5) on the mounting bracket (P1) and use the Cap nut (P6) to screw tighten.
7. Put the plastic pad (P20) into the glass lamp shade (P18)(P19), then put it into the socket (P17), and lock it with the lamp ring (P21).
8. Install E26 light source, no include bulb.

The end!

PARTS LIST

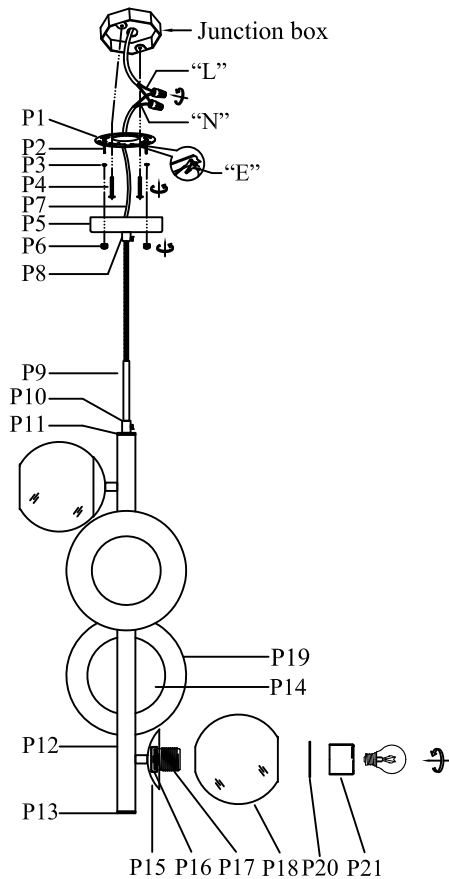

Part	Picture	Description	Qty	Check list
P1		L4" Mounting bracket	1	
P2		5/32-32 Screw	2	
P3		Hex nut	2	
P4		5/32-32 Screw	2	
P5		D4.72" Canopy cover	1	
P6		Cap nut	2	
P7		Two-core Power Cord 5.6' Black	1	
P8		Car iron parts	1	
P9		L4.13" Tube	1	
P10		Coupling	1	
P11		Pipe Plug	1	
P12		D1.2"*L24.8" Rod	1	
P13		Pipe Plug	1	
P14		D5.12" Receiver bowl	2	
P15		D3.94" Receiver bowl	2	
P16		D1.65" Straight edge cover	4	
P17		E26 Socket	4	
P18		D5.9"*H5.4" Glass lampshade	2	
P19		D7.9"*H7.5" Glass lampshade	2	
P20		Plastic pad	4	
P21		D2" Lamp ring	4	

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire